




5	6	7	8
REV. B	ECN NO. LEN1430413	DATE 2012/10/04	SIGN Ruru
			DESCRIPTION Change the Appearance

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

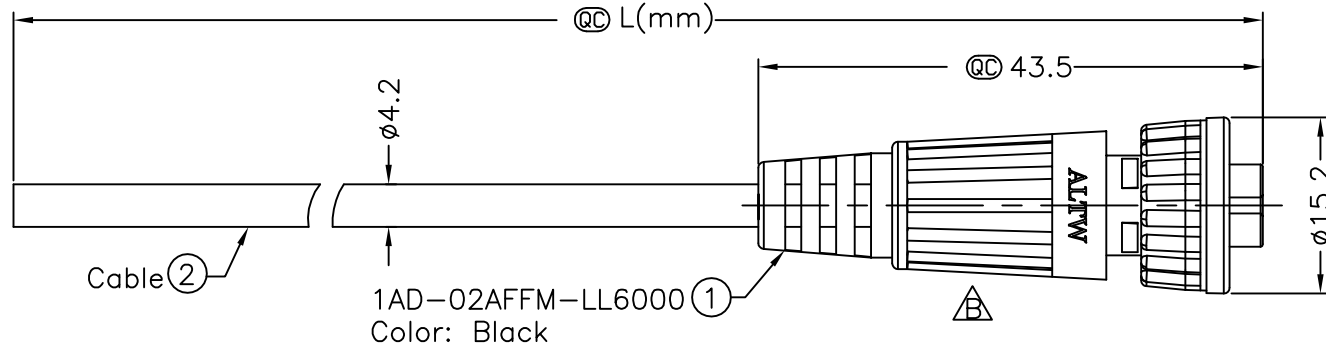

1AD-02AFFM-LL6AXX


- XX :01~99Meters
- 01 :01Meter
- 02 :02Meters
- ...
- 99 :99Meters

Cable Length(L):01~99Meters

Note :

- * @Q Important Dimension To Check.
- * Waterproof Rate: IP66
- * Housing: Nylon+GF, Black.
- * Female Pin: Copper Alloy, Gold Plated.
- * Cable: UL2464 24AWG*2C+D+AL/Wy
- * PVC Jacket UV Resistant, OD=4.2, Black.
- * Cable Length Tolerance: 01M:40mm

- 02M~05M:± 60mm
- 06M~10M:± 100mm
- 11M~30M:± 200mm
- 31M~99M:± 500mm



Pin Assignments
Front View

2	Red	紅
1	Black	黑
Conn.	Wire Color	

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE		MINI CNC PIN	
CABLE LOCK 2PIN F CONN F PIN			
SCALE	Free	SHEET	1 OF 1
REV. B	SIZE A4	@Q :Inspection Item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	1AD-02AFFM-LL6AXX
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Tony
APPROVED BY	Victor

DATE	2014/03/10
DATE	2014/03/10
DATE	2014/03/10

A B C D E F

1 2 3 4 5 6 7 8