

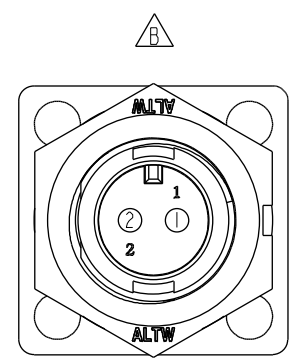
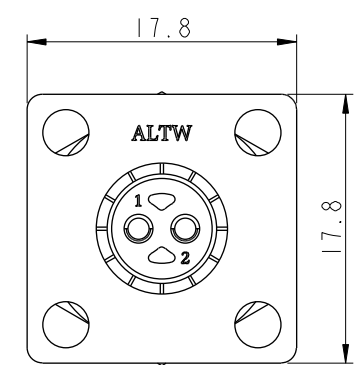
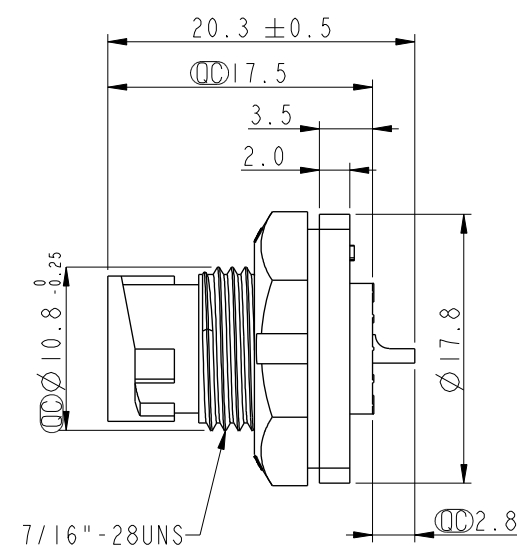


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2013/10/23	Ann	New Item
B	LEN1741225	2017/04/13	Ruru	Change Logo
C	CI90315	2019/03/18	Ruru	Modify Note & Add QC Dimension

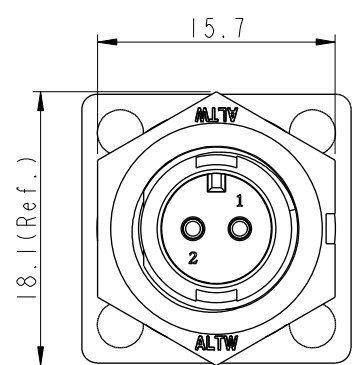

Pin Assignments
Front View

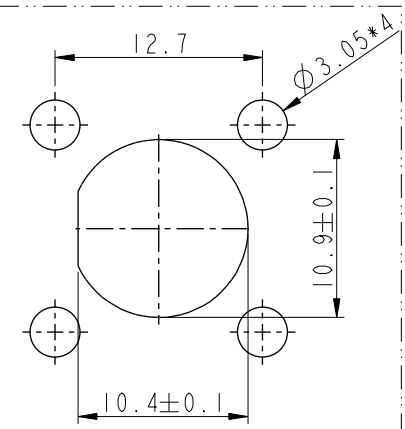

Recommended Panel
Cut-Out

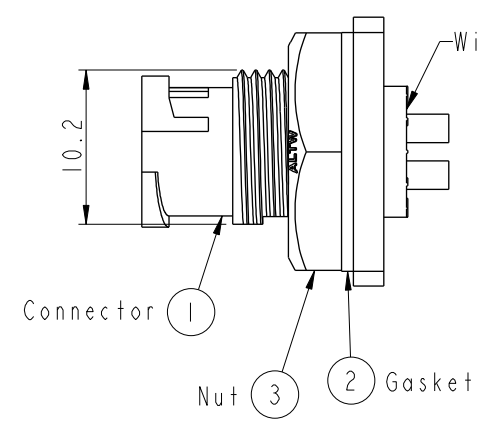

Note:

- * Important Dimension
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Gray
- * Use with waterproof cap or dust cap
Maximum Panel Thickness: 2.3mm
- * Use without waterproof cap or dust cap
Maximum Panel Thickness: 3.5mm
- * Gasket and Nut are packed separately
in PE bags

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		Mini CNC Pin		IAD-02PMMS-LS7001		Ruru		2019-03-18	
.XXX ±0.05		ANGLES ±1°		Panel Lock 2Pin M Conn M Pin		DWG NO		CHECKED BY		DATE	
2:1		A4		SHEET 1 OF 1		IAD-02PMMS-LS7001		Rita		2019-03-18	
REV. C		WC-REV. A.4		QC: Inspection item		CUSTOMER		APPROVED BY		DATE	
						ALTW		Max		2019-03-18	

Amphenol LTW
安費諾亮泰企業股份有限公司