
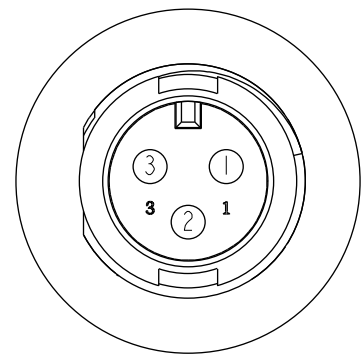
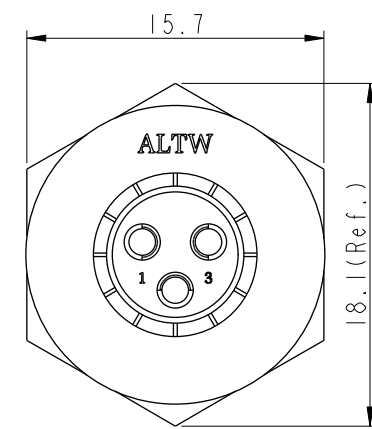
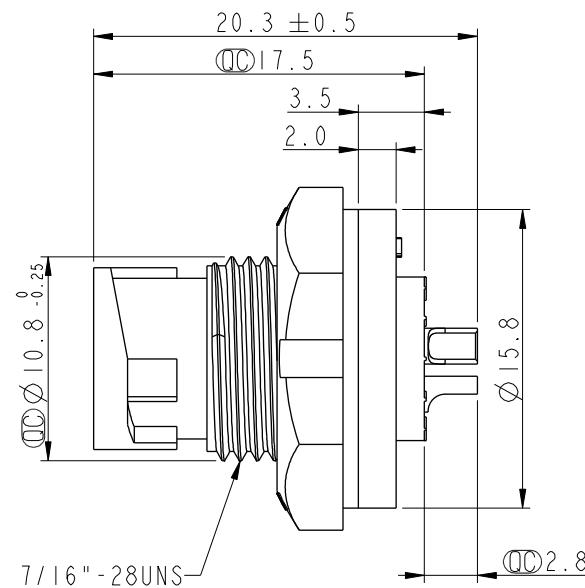



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2013/10/24	Ann	New Item
B	C190315	2019/03/18	Ruru	Modify Note & Add QC Dimension


ALTW
CONFIDENTIAL
2019-03-18
R&D DEPT.

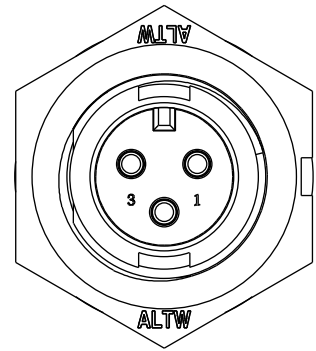

Pin Assignments
Front View



Recommended Panel
Cut-Out

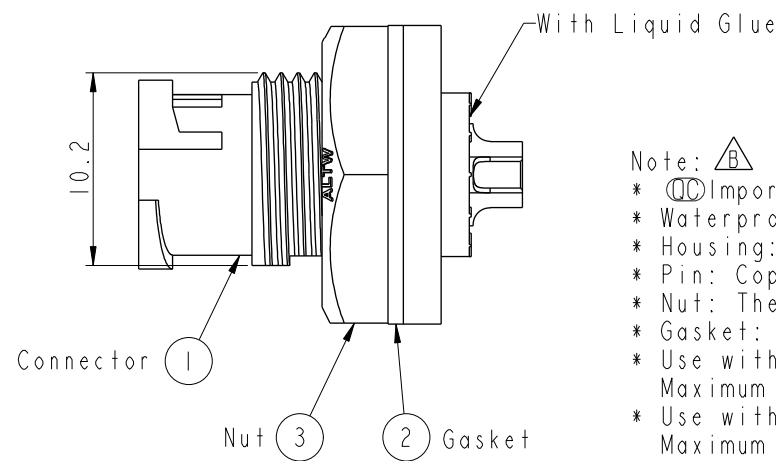

- Note: 
- *  Important Dimension
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Gray
 - * Use with waterproof cap or dust cap
Maximum Panel Thickness: 2.3mm
 - * Use without waterproof cap or dust cap
Maximum Panel Thickness: 3.5mm
 - * Gasket and Nut are packed separately
in PE bags

UNIT:mm			TITLE Mini CNC Pin Panel Screw 3Pin M Conn M Pin
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE 5:2	SIZE A4	SHEET 1 OF 1
REV. B	WC-REV. A.2	 Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO IAD-03PMMS-LC7001	DRAWN BY Ruru	DATE 2019-03-18
DWG NO IAD-03PMMS-LC7001	CHECKED BY Rita	DATE 2019-03-18
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-03-18