

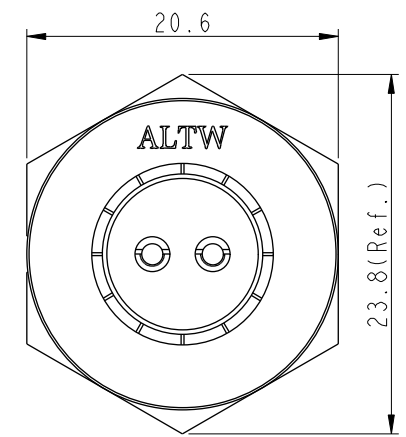
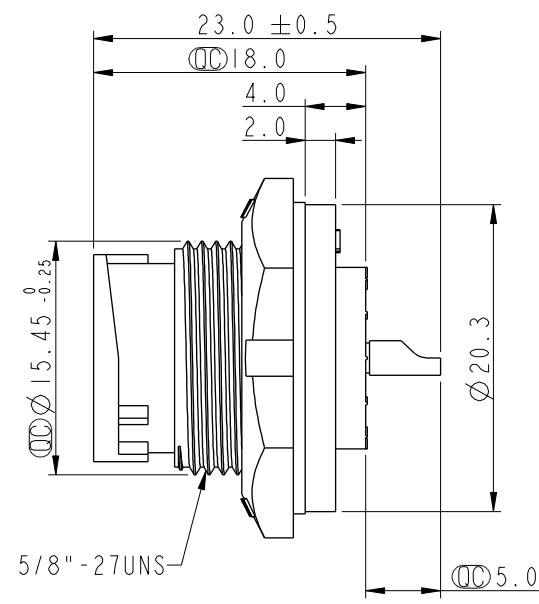



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014/01/17	Ann	New Item
B	C190315	2019/03/19	Ruru	Modify Note & Add QC Dimension


ALTW
CONFIDENTIAL
2019-03-19
R&D DEPT.

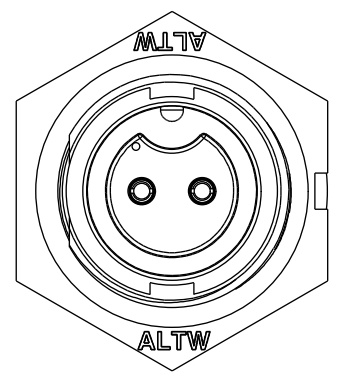

Pin Assignments
Front View



Recommended Panel
Cut-Out

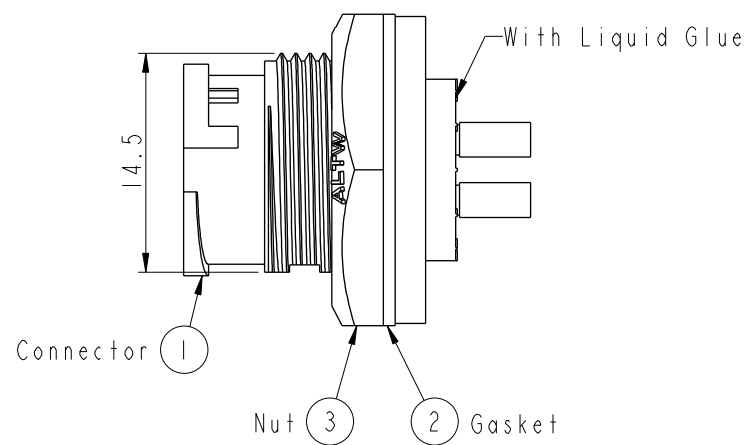

- Note: 
- *  Important Dimension
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Gray
 - * Use with waterproof cap or dust cap
Maximum Panel Thickness: 1.3mm
 - * Use without waterproof cap or dust cap
Maximum Panel Thickness: 2.5mm
 - * Gasket and Nut are packed separately
in PE bags

UNIT: mm		TOLERANCE		TITLE		ITEM NO.		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		STANDARD		IBD-02PMFS-LC7001		Ruru		2019-03-19	
.XXX ±0.05		ANGLES ±1°		PANEL LOCK 2PIN M CONN F PIN		DWG NO.		CHECKED BY		DATE	
				SCALE 2:1		IBD-02PMFS-LC7001		Rita		2019-03-19	
				REV. B		CUSTOMER		APPROVED BY		DATE	
				SIZE A4		ALTW		Max		2019-03-19	
				SHEET 1 OF 1							
				WC-REV. A.3							
				QC: Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司