


Pin Assignments



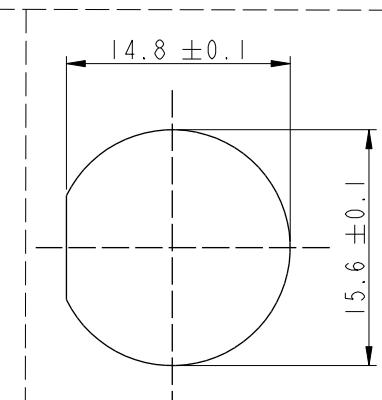


Recommended Panel Cut-Out

UNIT : mm  

TOLERANCE	
.X	± 0.25
.XX	± 0.1
.XXX	± 0.05
ANGLES	$\pm 1^\circ$

TITLE		N CERES, ME, B-5A, 04P, REAR FASTENED M, F, SOLDER, 2LOCK			
SCALE	2:1	SIZE	A4	SHEET	
REV.	C	WC-REV.	A.2	(QC): Inspection item	

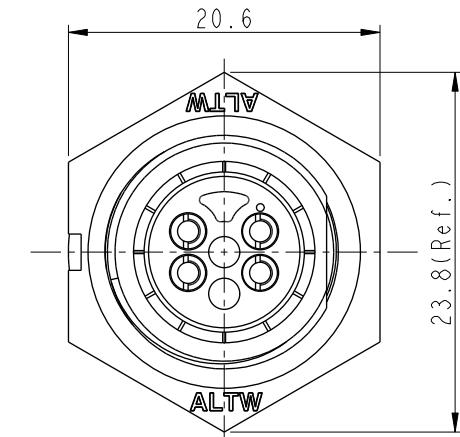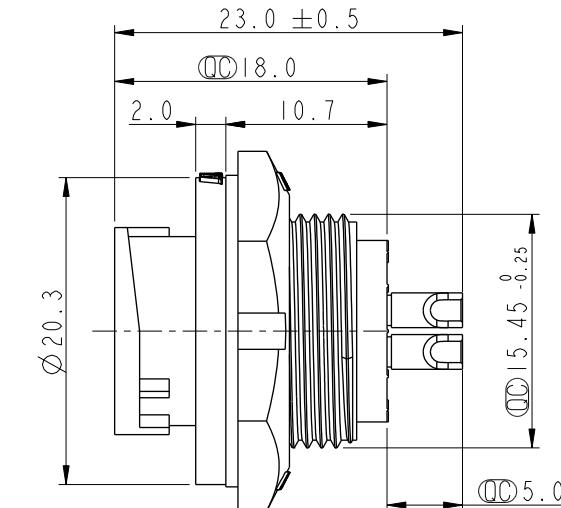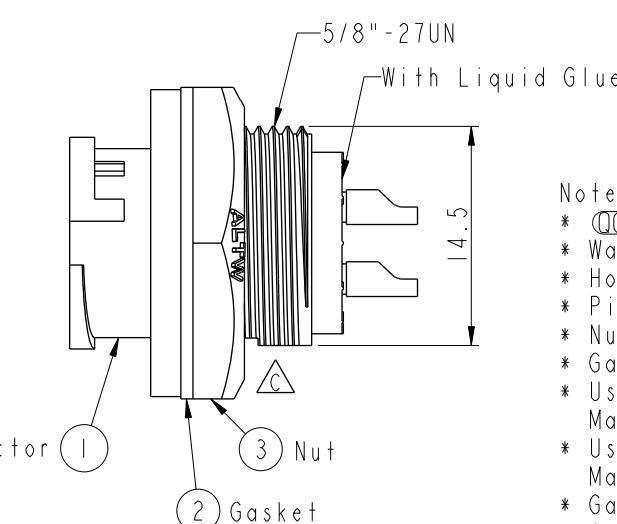

Note: B

- *  Important Dimension
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Gray
- * Use with waterproof cap or dust cap
Maximum Panel Thickness: 2.3mm
- * Use without waterproof cap or dust cap
Maximum Panel Thickness: 3.5mm
- * Gasket and Nut are packed separately
in PE bags

Amphenol LTW

ITEM NO	DRAWN BY	DATE	
W 公司	IBD-04RMFS-LC7001	Ruru	2024-05-23
DWG NO	CHECKED BY	DATE	
IBD-04RMFS-LC7001	Rita	2024-05-23	
CUSTOMER	APPROVED BY	DATE	
AL TW	Fred	2024-05-23	