

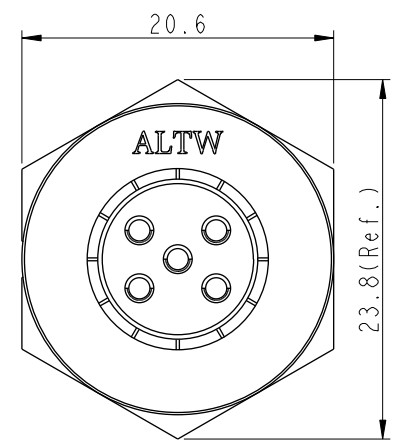
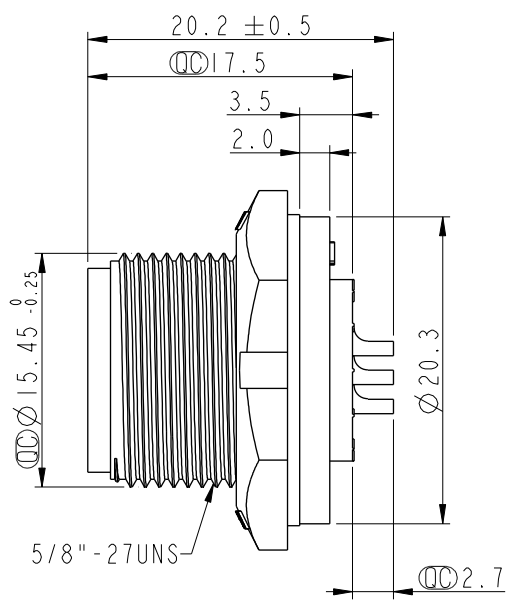



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014/01/15	Ann	New Item
B	C190315	2019/03/20	Ruru	Modify Note & Add QC Dimension


ALTW
CONFIDENTIAL
2019-03-20
R&D DEPT.

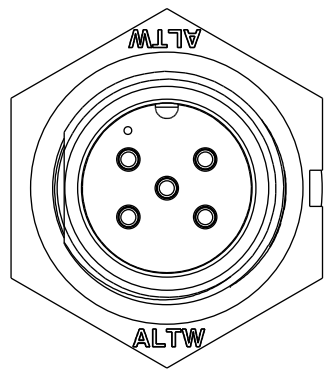

Pin Assignments
Front View



Recommended Panel
Cut-Out

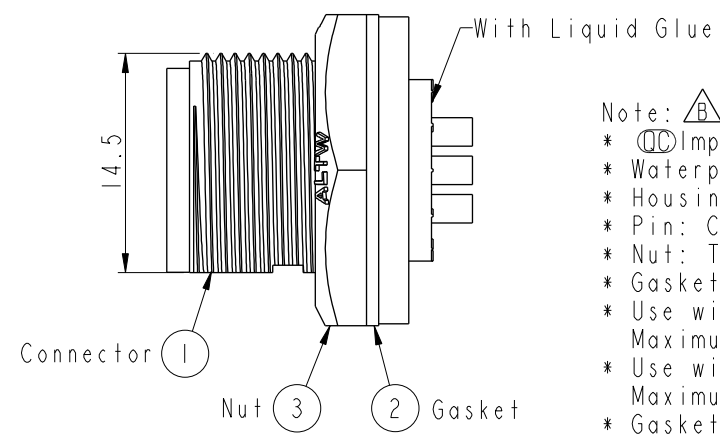

- Note: **B**
- * **QC** Important Dimension
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Gray
 - * Use with waterproof cap or dust cap
Maximum Panel Thickness: 1.3mm
 - * Use without waterproof cap or dust cap
Maximum Panel Thickness: 2.5mm
 - * Gasket and Nut are packed separately
in PE bags

UNIT:mm		TITLE STANDARD CNC PIN PANEL SCREW 5PIN M CONN M PIN		
TOLERANCE		SCALE	SIZE	SHEET
.X ±0.25		2:1	A4	1 OF 1
.XX ±0.1		REV.	WC-REV.	
.XXX ±0.05		B	A.5	
ANGLES ±1°				QC : Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	IBD-05PMMS-SC7001	DRAWN BY	Ruru	DATE	2019-03-20
DWG NO	IBD-05PMMS-SC7001	CHECKED BY	Rita	DATE	2019-03-20
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-03-20