

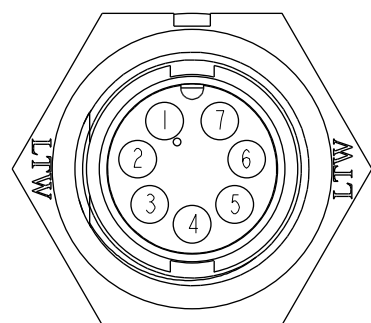
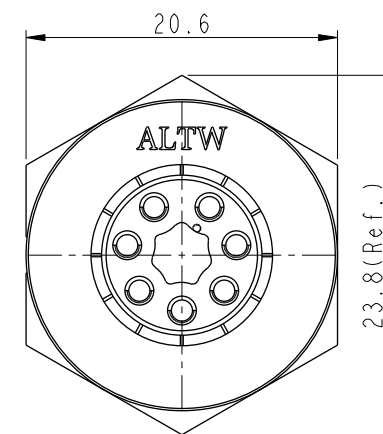
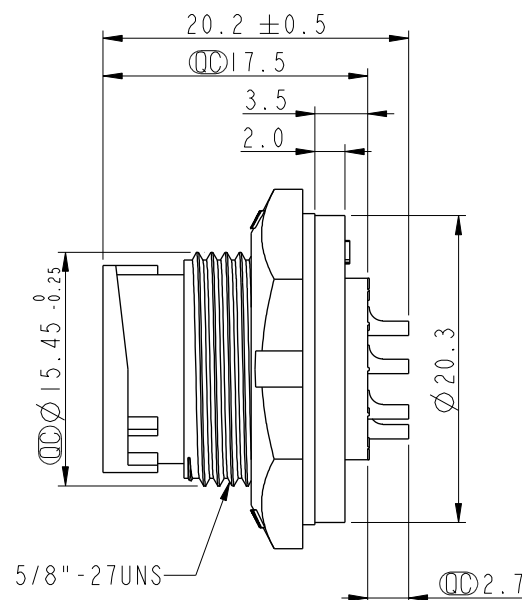
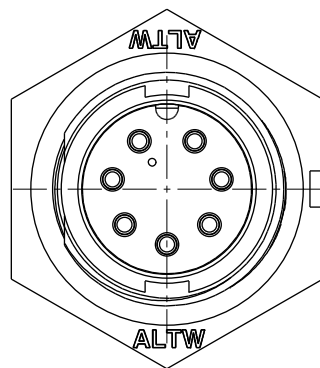



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2013/11/12	Ann	New Item
B	C190308	2019/03/20	Ruru	Modify Note & Add QC Dimension



Pin Assignments
Front View




Recommended Panel
Cut-Out

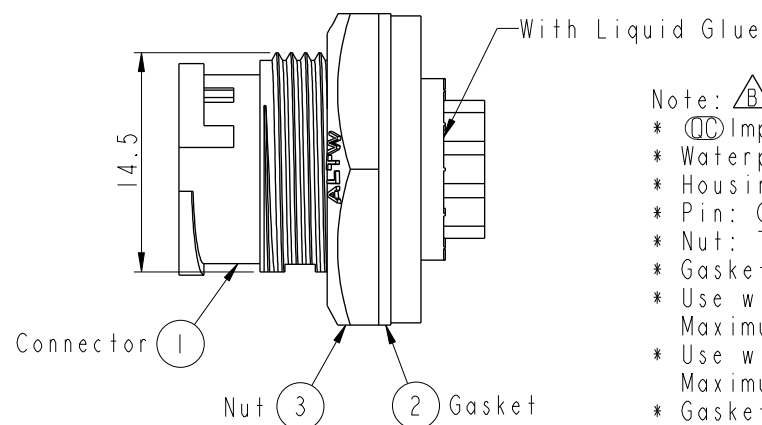

Note: **B**

- * **CC** Important Dimension
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Gray
- * Use with waterproof cap or dust cap
Maximum Panel Thickness: 2.8mm
- * Use without waterproof cap or dust cap
Maximum Panel Thickness: 4.0mm
- * Gasket and Nut are packed separately
in PE bags

UNIT:mm



TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE
Standard CNC Pin
Panel Lock 7Pin M Conn M Pin

SCALE 2:1
SIZE A4
SHEET 1 OF 1
REV. B
WC-REV. A.3
QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	IBD-07PMMS-LC7001	DRAWN BY	Ruru	DATE	2019-03-20
DWG NO	IBD-07PMMS-LC7001	CHECKED BY	Rita	DATE	2019-03-20
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-03-20