


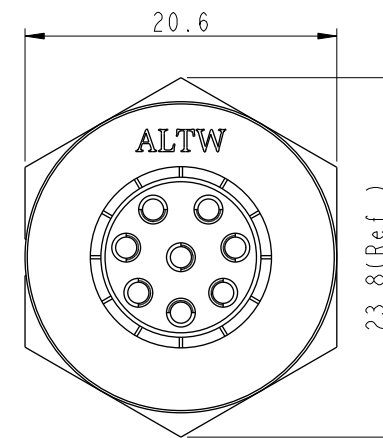
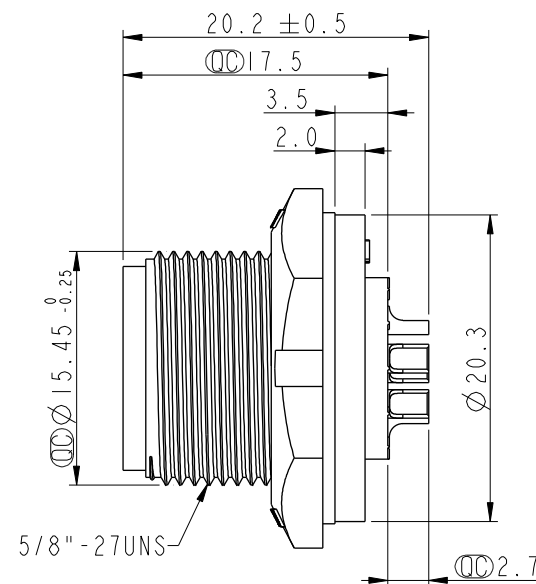
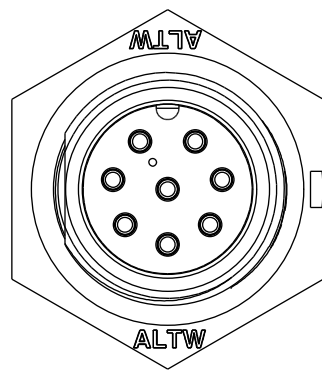



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014/01/17	Ann	New Item
B	C190308	2019/03/20	Ruru	Modify Note & Add QC Dimension



Pin Assignments
Front View



Recommended Panel
Cut-Out

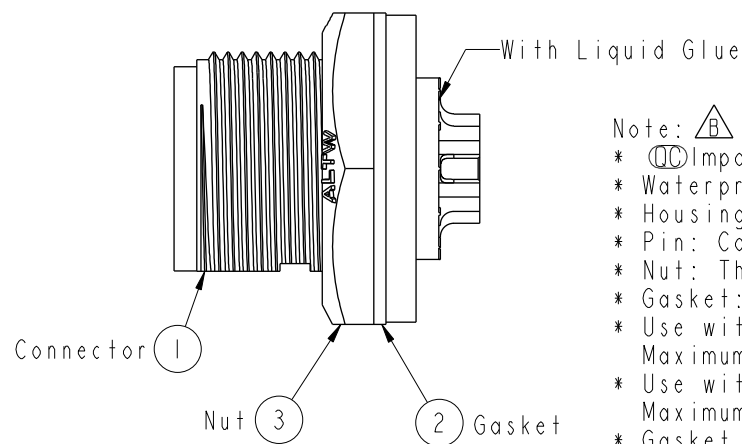

Note: 

- *  Important Dimension
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Gray
- * Use with waterproof cap or dust cap
Maximum Panel Thickness: 1.3mm
- * Use without waterproof cap or dust cap
Maximum Panel Thickness: 2.5mm
- * Gasket and Nut are packed separately
in PE bags

UNIT:mm			TITLE
TOLERANCE	.X ±0.25	.XX ±0.1	STANDARD CNC PIN PANEL SCREW 8PIN M CONN M PIN
.XXX ±0.05			SCALE 2:1
ANGLES ±1°			SIZE A4
			SHEET 1 OF 1
			REV. B
			WC-REV. A.4
			QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	IBD-08PMMS-SC7001	DRAWN BY	Ruru	DATE	2019-03-20
DWG NO	IBD-08PMMS-SC7001	CHECKED BY	Rita	DATE	2019-03-20
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-03-20