
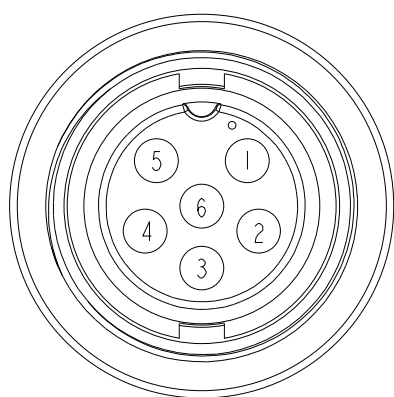



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

1	2	3	4	5	6	7	8
REV.	ECN NO.	DATE	SIGN	DESCRIPTION			

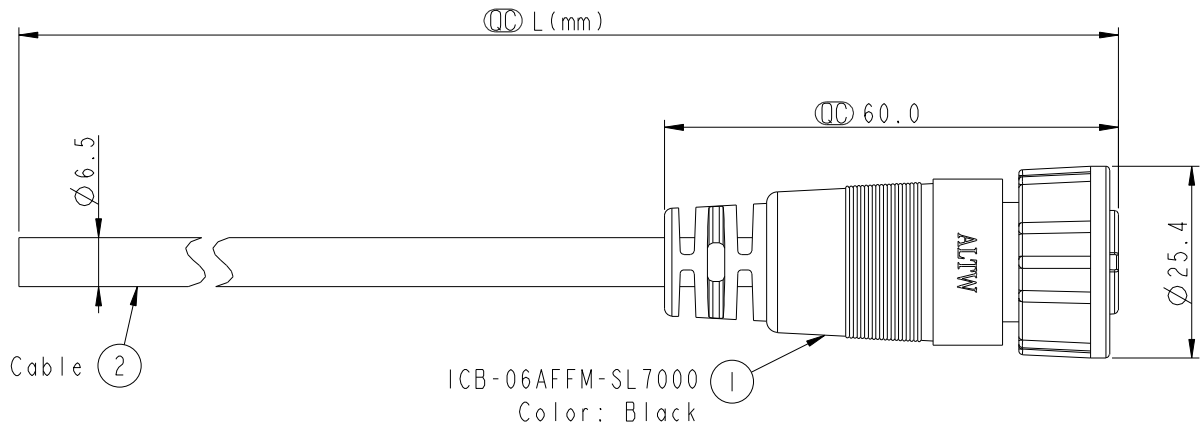

Pin Assignments
Front View

6	Gary	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
Pin Out		

ICB-06AFFM-SL7AXX

- XX : 01~99Meters
- 01 : 01Meter
- 02 : 02Meters
- :
- 99 : 99Meters

Cable Length(L):01~99Meters

- Note:
- * $\varnothing$ Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * Screw Nut: Nylon+GF, Black.
 - * O-Ring: Silicon, Gray
 - * Cable: UL2464 20AWG*6C+D+AI/My PVC Jacket UV Resistant, OD=6.5, Black.
 - * Cable Length Tolerance: 01M:40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm		TITLE	
TOLERANCE	±0.5	MIDDLE CNC PIN CABLE SCREW 6P F CONN F PIN	
SCALE	1:1	SIZE	A4
REV.	A	WC-REV.	A.2
		SHEET	1 OF 1
		QC: Inspection item	

ITEM NO		DRAWN BY	DATE
DWG NO		CHECKED BY	DATE
CUSTOMER		APPROVED BY	DATE
ALTW		Jiazhen_li	2014-01-10
ICB-06AFFM-SL7AXX		Ruru	2014-01-10
		Jerry	2014-01-10

Amphenol LTW
安費諾亮泰企業股份有限公司