


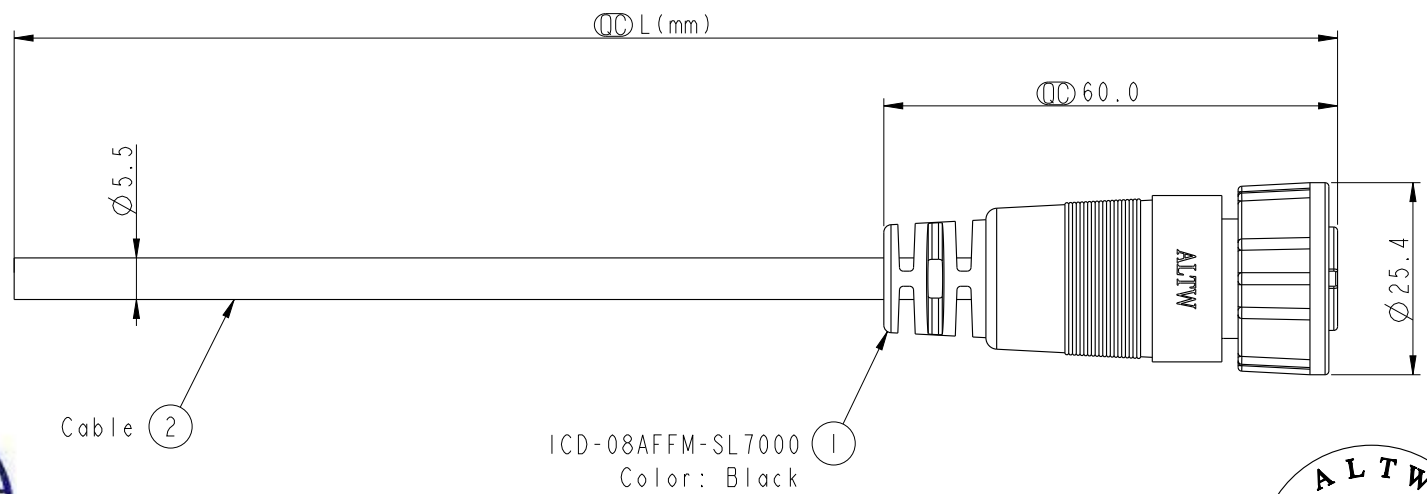


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION

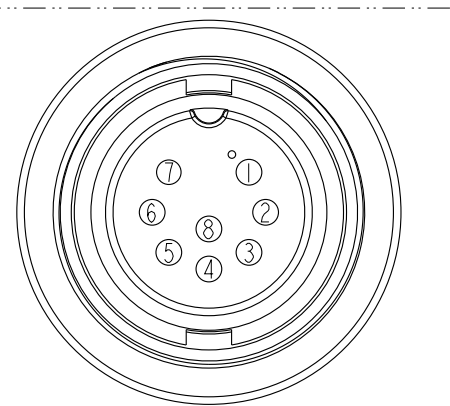

Conn.



Pin Assignments
Front View

8	Green	綠
7	Yellow	黃
6	Orange	橙
5	Red	紅
4	Blue	藍
3	White	白
2	Brown	棕
1	Black	黑
Conn. Wire Color		
Pin Out		

ICD-08AFFM-SL7AXX

- XX : 01~99Meters
- 01 : 01Meter
- 02 : 02Meters
- :
- :
- 99 : 99Meters

Cable Length(L):01~99Meters

- Note:
- * $\varnothing$ Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * Screw Nut: Nylon+GF, Black.
 - * O-Ring: Silicon, Gray
 - * Cable: UL2464 24AWG*8C+Drain+AI/My PVC Jacket UV Resistant, OD=5.5, Black.
 - * Cable Length Tolerance: 01M:40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
±0.5		MIDDLE CNC PIN CABLE SCREW 8P F CONN F PIN		Amphenol LTW		ICD-08AFFM-SL7AXX		Tony-leng		2013-11-01	
SCALE 1:1		SIZE A4		SHEET 1 OF 1		CUSTOMER ALTW		CHECKED BY Ruru		DATE 2013-11-01	
REV. A		WC-REV. A.1		QC: Inspection item				APPROVED BY Jerry		DATE 2013-11-01	
										FMW10702-01-02A1	

安費諾亮泰企業股份有限公司