

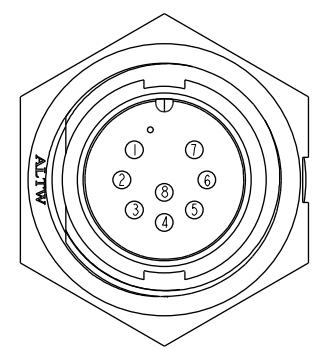
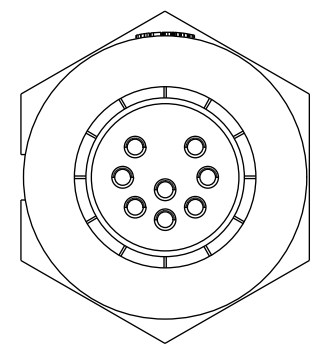
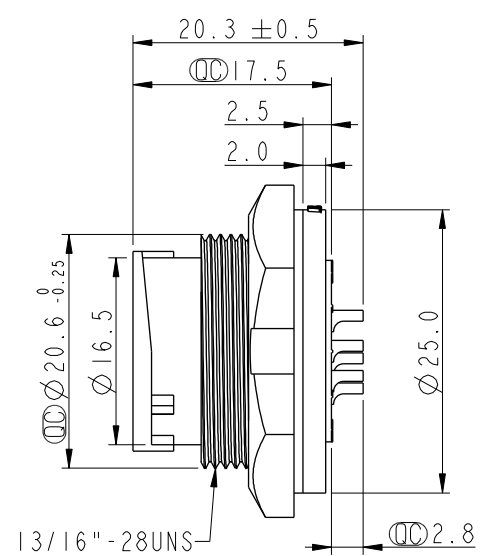


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014-01-03	Jason.Yu	New Item
B	C190308	2019/03/21	Ruru	Modify Note & Add QC Dimension

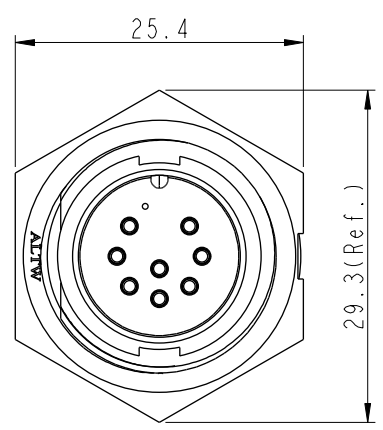

Pin Assignments
Front View

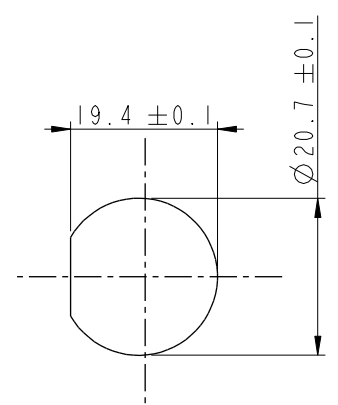

Recommended Panel
Cut-out

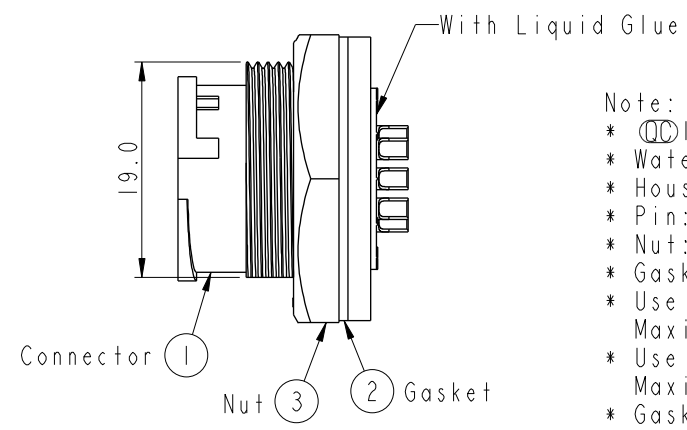

- Note: Important Dimension
- * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Gray
 - * Use with waterproof cap or dust cap
Maximum Panel Thickness: 2.8mm
 - * Use without waterproof cap or dust cap
Maximum Panel Thickness: 4.0mm
 - * Gasket and Nut are packed separately in PE bags

UNIT: mm

TOLERANCE

.X ±0.25

.XX ±0.1

.XXX ±0.05

ANGLES ±1°

SCALE 3:2

SIZE A4

SHEET 1 OF 1

REV. B

WC-REV. A.4

QC: Inspection item

TITLE

MIDDLE CNC PIN

PANEL LOCK 8PIN M CONN M PIN

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

ICD-08PMMS-LC7001

DWG NO

ICD-08PMMS-LC7001

CUSTOMER

ALTW

DRAWN BY

Ruru

CHECKED BY

Rita

APPROVED BY

Max

DATE

2019-03-21

DATE

2019-03-21

DATE

2019-03-21

1

2

3

4

5

6

7

8

WI0814-03-PM01A2

CD By Amphenol LTW.