

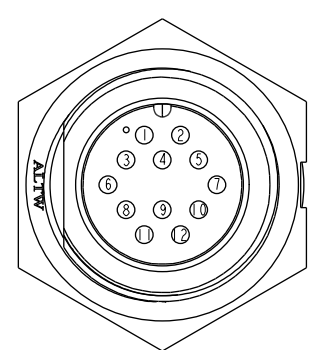
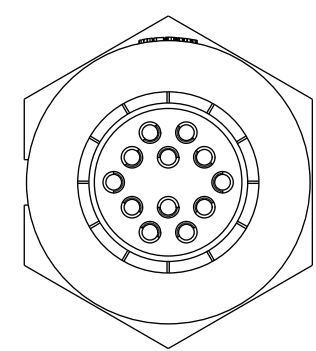
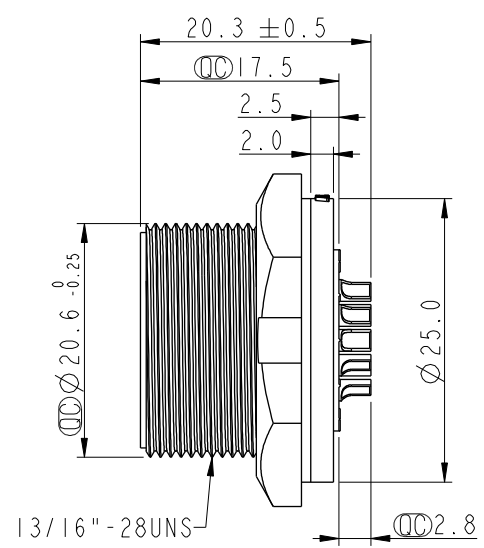
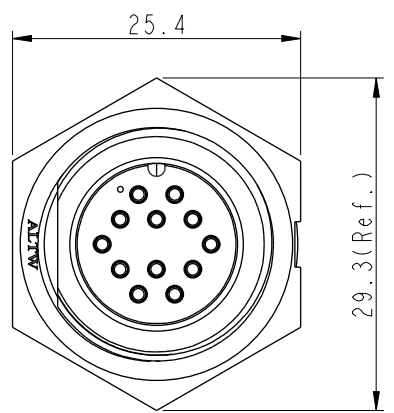


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014-01-08	Jason.Yu	New Item
B	CI90308	2019/03/22	Ruru	Modify Note & Add QC Dimension



Pin Assignments
Front View

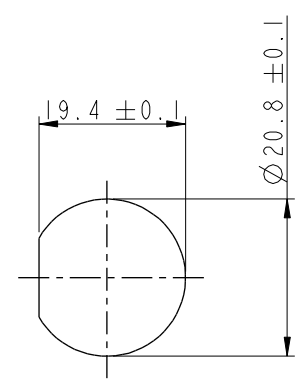

Recommended Panel
Cut-Out

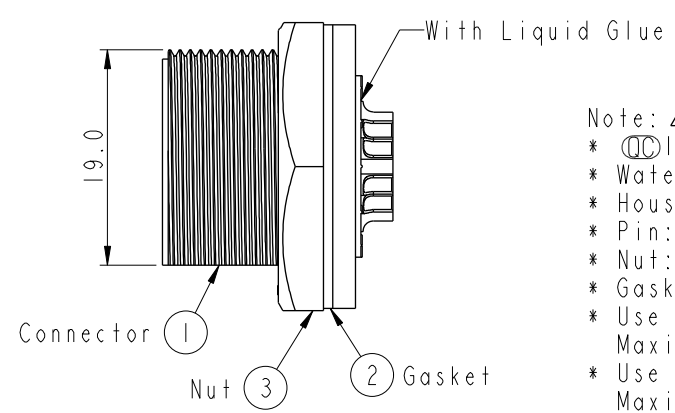

- Note: 
- *  Important Dimension
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Gray
 - * Use with waterproof cap or dust cap
Maximum Panel Thickness: 2.5mm
 - * Use without waterproof cap or dust cap
Maximum Panel Thickness: 3.5mm
 - * Gasket and Nut are packed separately in PE bags

UNIT: mm		TOLERANCE		TITLE		ITEM NO.		DRAWN BY		DATE	
.X	±0.25	MIDDLE CNC PIN		ICD-12PMMS-SC7001		Ruru		2019-03-22			
.XX	±0.1	PANEL SCREW 12PIN M CONN M PIN		ICD-12PMMS-SC7001		Rita		2019-03-22			
.XXX	±0.05	SCALE	3:2	SIZE	A4	APPROVED BY		Max		2019-03-22	
ANGLES	±1°	REV.	B	WC-REV.	A.4	CUSTOMER		ALTW			
				 Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司