


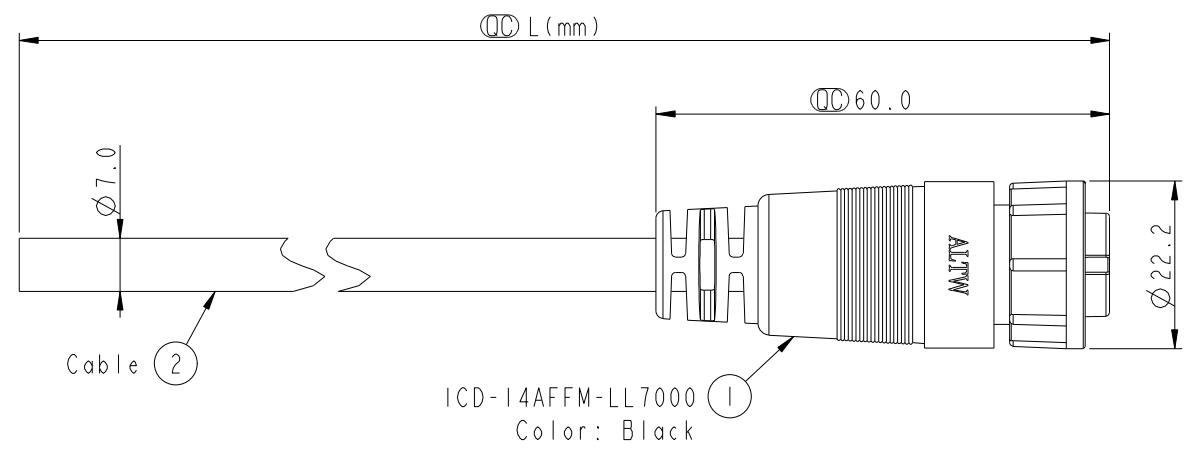


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION

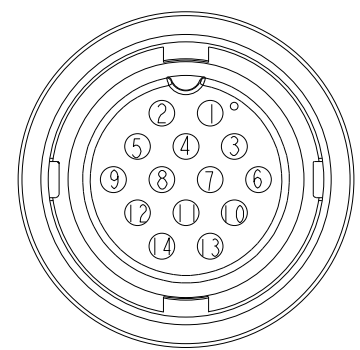

Conn.



Pin Assignments
Front View

14	Brown/White	棕/白
13	Black/White	黑/白
12	Light Green	淺綠
11	Purple	紫
10	Orange	橙
9	Black	黑
8	Red	紅
7	Pink	粉紅
6	Gary	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
	Pin Out	

ICD-14AFFM-LL7AXX

XX : 01~99Meters
01 : 01Meter
02 : 02Meters
:
99 : 99Meters

Cable Length(L):01~99Meters

- Note:
- * $\varnothing$ Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * Lock Nut: Nylon+GF, Black.
 - * O-Ring: Silicon, Gray
 - * Cable: UL2464 24AWG*14C+Drain+Al/My PVC Jacket UV Resistant, OD=7.0, Black.
 - * Cable Length Tolerance: 01M:40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm		TOLERANCE		TITLE		MIDDLE CNC PIN CABLE LOCK 14P F CONN F PIN		Amphenol LTW		ITEM NO		DRAWN BY		DATE	
±0.5				SCALE		SIZE		A4		SHEET		OF		1	
REV.		A		WC-REV.		A.2		$\varnothing$ Inspection item		ICD-14AFFM-LL7AXX		Ruru		2014-01-10	
CUSTOMER		ALTW		APPROVED BY		Jerry		DATE		2014-01-10					