
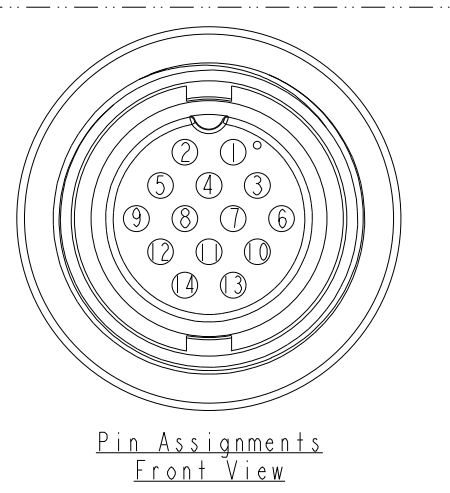



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

1	2	3	4	5	6	7	8
REV.	ECN NO.	DATE	SIGN	DESCRIPTION			

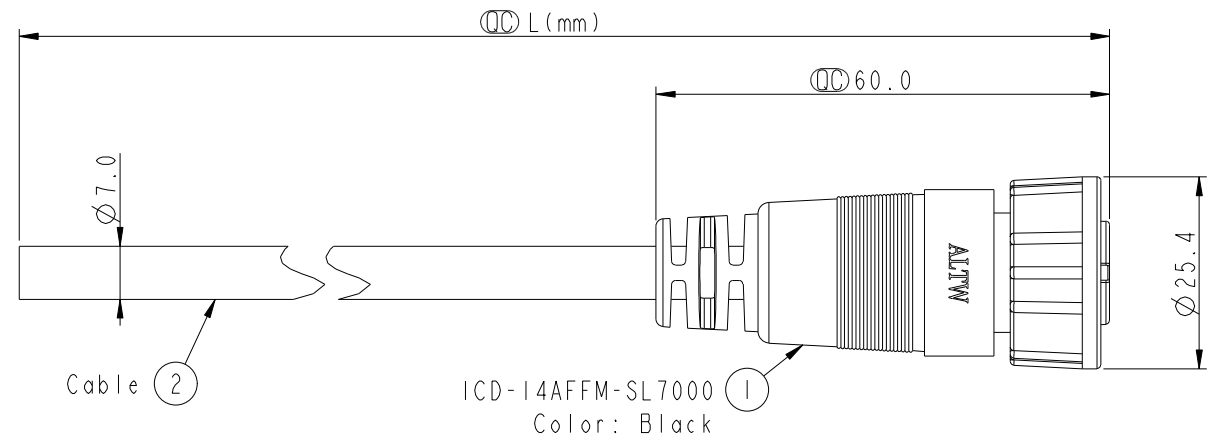

14	Brown/White	棕/白
13	Black/White	黑/白
12	Light Green	淺綠
11	Purple	紫
10	Orange	橙
9	Black	黑
8	Red	紅
7	Pink	粉紅
6	Gray	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕
Conn. Wire Color Pin Out		

ICD-14AFFM-SL7AXX

XX : 01~99Meters
01 : 01Meter
02 : 02Meters
:
:
99 : 99Meters

Cable Length(L): 01~99Meters

- Note:
- * $\varnothing$ Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * Screw Nut: Nylon+GF, Black.
 - * O-Ring: Silicon, Gray
 - * Cable: UL2464 24AWG*14C+Drain+Al/My PVC Jacket UV Resistant, OD=7.0, Black.
 - * Cable Length Tolerance: 01M: 40mm
02M~05M: ± 60 mm
06M~10M: ± 100 mm
11M~30M: ± 200 mm
31M~99M: ± 500 mm

A	UNIT:mm			TITLE			MIDDLE CNC PIN CABLE SCREW 14P F CONN F PIN		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO		DRAWN BY		DATE											
	TOLERANCE			SCALE							SIZE		SHEET		DWG NO		CHECKED BY		DATE							
	±0.5		1:1			A4		1			OF 1		ICD-14AFFM-SL7AXX		Ruru		2014-01-10									
			REV. A			WC-REV. A.2		QC			Inspection item		CUSTOMER		APPROVED BY		DATE									
													ALTW		Jerry		2014-01-10									
1			2			3			4			5			6			7			8			FMW10702-01-02A1		