
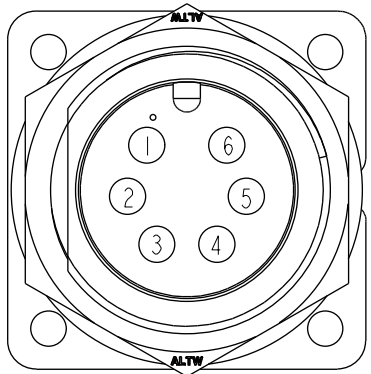
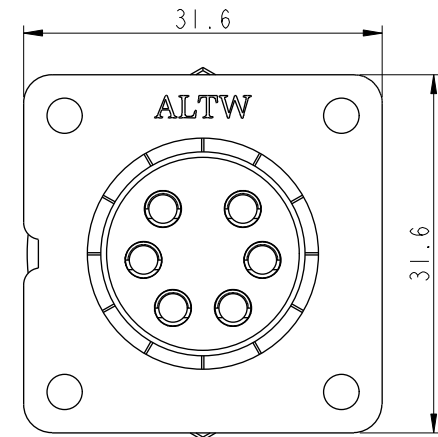
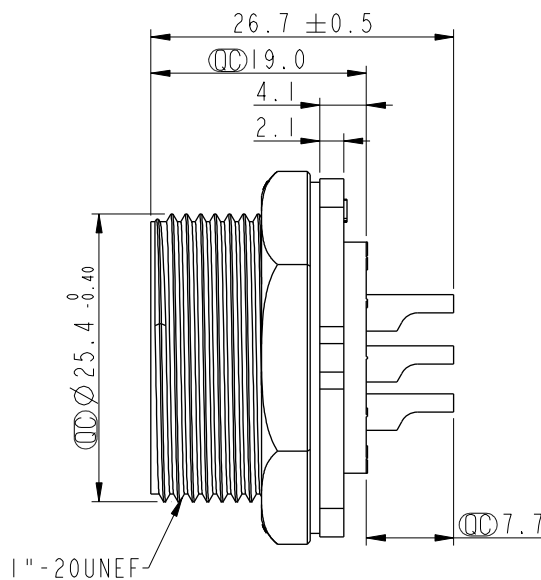



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014-01-23	Jason.Yu	New Item
B	CI90342	2019/03/25	Ruru	Modify Note & Add QC Dimension


ALTW
CONFIDENTIAL
2019-03-25
R&D DEPT.

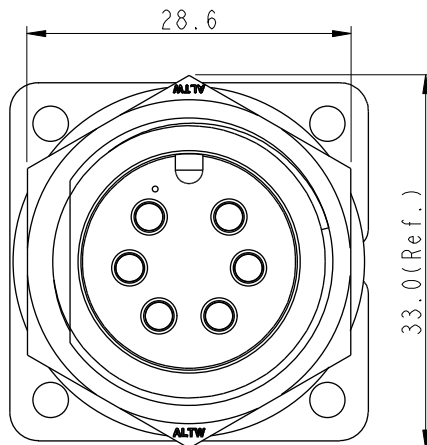

Pin Assignments
Front View

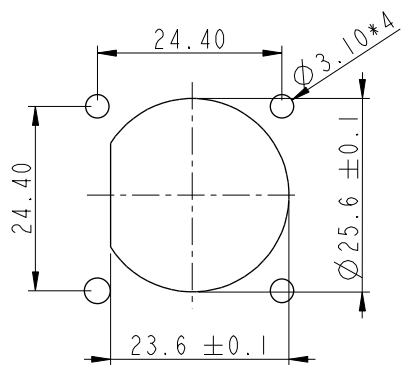

Recommended Panel
Cut-Out

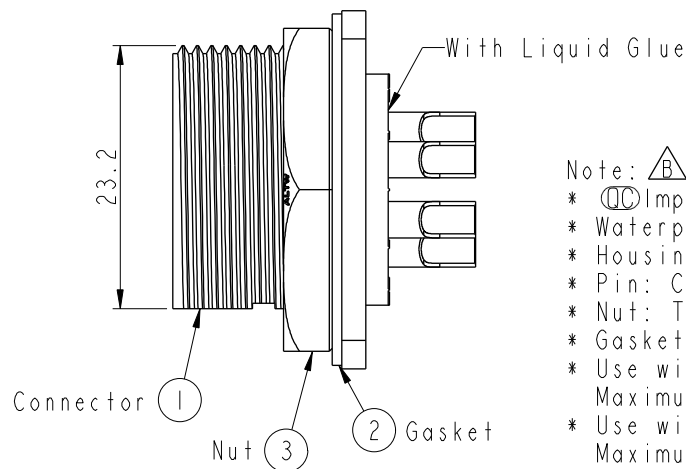

- Note: **B**
- * **CC** Important Dimension
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Gray
 - * Use with waterproof cap or dust cap
Maximum Panel Thickness: 1.5mm
 - * Use without waterproof cap or dust cap
Maximum Panel Thickness: 2.7mm
 - * Gasket and Nut are packed separately
in PE bags

UNIT:mm		TOLERANCE		TITLE		ITEM NO		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		LARGE CNC PIN		IDC-06PMMS-SS7001		Ruru		2019-03-25	
.XXX ±0.05		ANGLES ±1°		PANEL SCREW 6P M CONN M PIN		DWG NO		CHECKED BY		DATE	
SCALE 3:2		SIZE A4		SHEET 1 OF 1		IDC-06PMMS-SS7001		Rita		2019-03-25	
REV. B		WC-REV. A.3		QC: Inspection item		CUSTOMER		APPROVED BY		DATE	
						ALTW		Max		2019-03-25	

Amphenol LTW
安費諾亮泰企業股份有限公司