

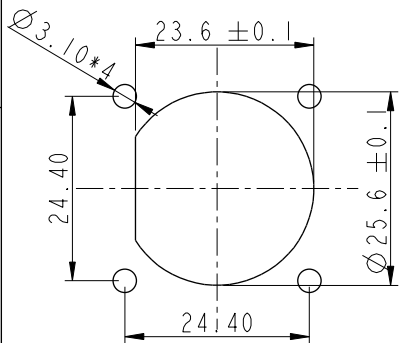
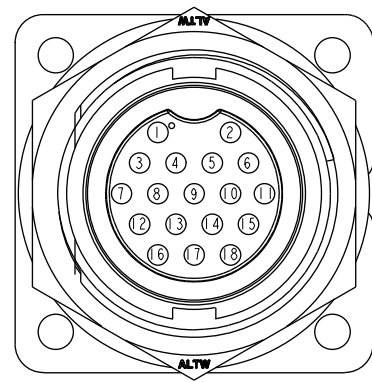
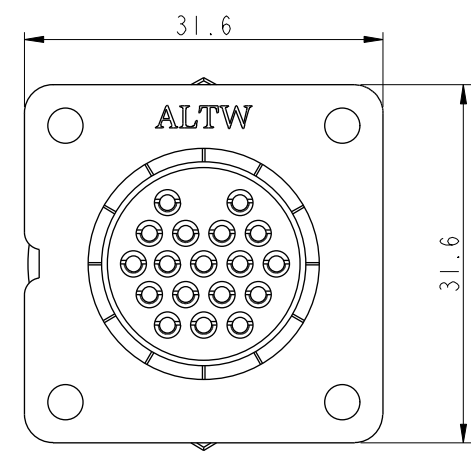


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014-02-10	Jason.Yu	New Item
B	CI90342	2019/03/26	Ruru	Modify Note & Add QC Dimension

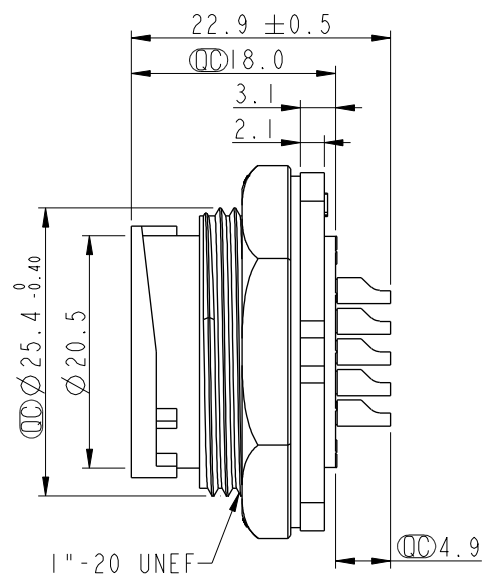

Recommended Panel
Cut-Out

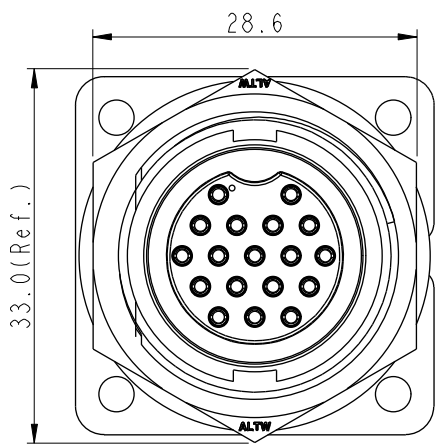

Pin Assignments
Front View

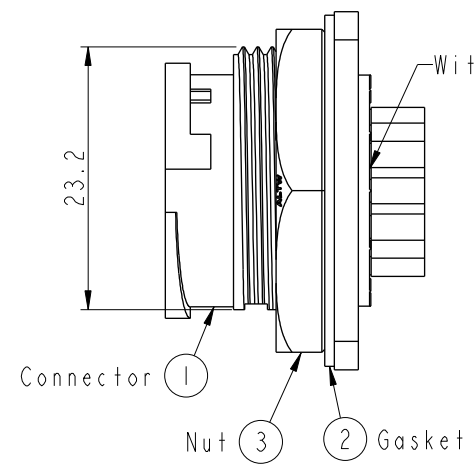

With Liquid Glue

Note: **B**

- * **QC** Important Dimension
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Gray
- * Use with waterproof cap or dust cap
Maximum Panel Thickness: 2.3mm
- * Use without waterproof cap or dust cap
Maximum Panel Thickness: 3.5mm
- * Gasket and Nut are packed separately
in PE bags

UNIT: mm		TOLERANCE		TITLE		ITEM NO.		DRAWN BY		DATE	
.X ±0.25		.XX ±0.1		LARGE CNC PIN		IDD-18PMFS-LS7001		Ruru		2019-03-26	
.XXX ±0.05		ANGLES ±1°		PANEL LOCK 18P M CONN F PIN		DWG NO.		CHECKED BY		DATE	
				SCALE 3:2		IDD-18PMFS-LS7001		Rita		2019-03-26	
				REV. B		CUSTOMER		APPROVED BY		DATE	
				SIZE A4		ALTW		Max		2019-03-26	
				SHEET 1 OF 1							
				WC-REV. A.3							
				QC : Inspection item							

Amphenol LTW

安費諾亮泰企業股份有限公司