



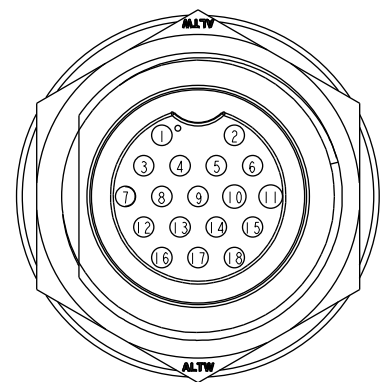
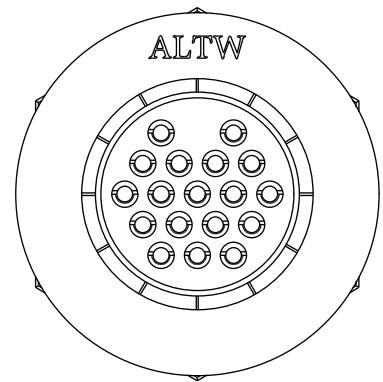


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014-02-10	Jason.Yu	New Item
B	C190342	2019/03/26	Ruru	Modify Note & Add QC Dimension

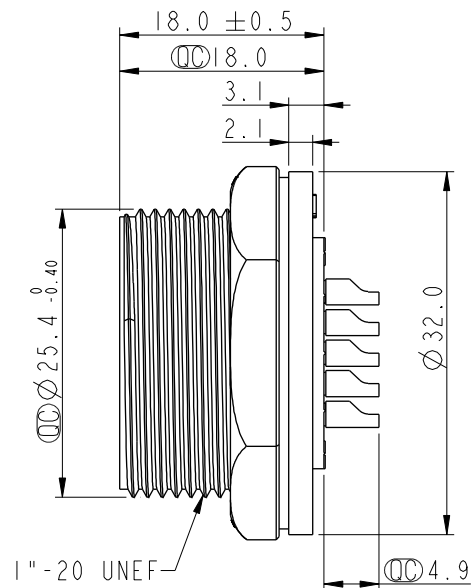

Recommended Panel
Cut-Out

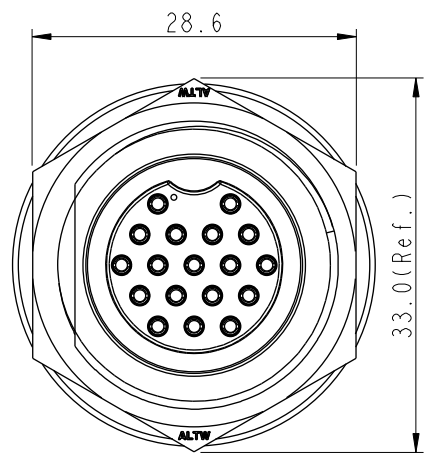

Pin Assignments
Front View

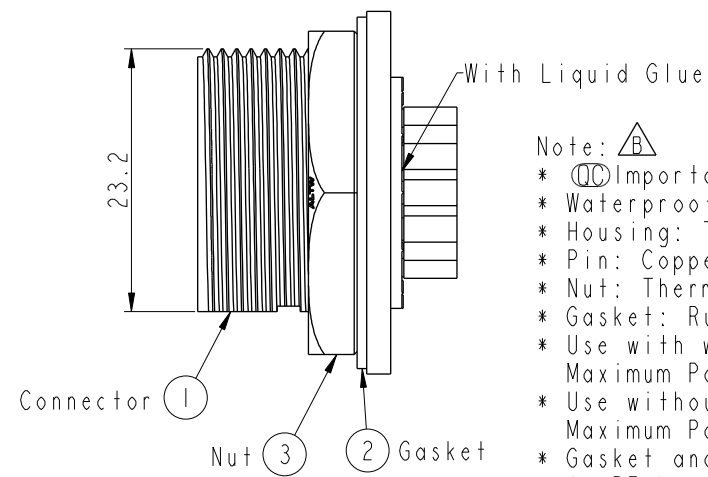

- Note: Important Dimension
- * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Gray
 - * Use with waterproof cap or dust cap
Maximum Panel Thickness: 1.5mm
 - * Use without waterproof cap or dust cap
Maximum Panel Thickness: 2.7mm
 - * Gasket and Nut are packed separately
in PE bags

UNIT: mm		TOLERANCE		TITLE		ITEM NO.		DRAWN BY		DATE	
.X ± 0.25		.XX ± 0.1		LARGE CNC PIN		IDD-18PMFS-SC7001		Ruru		2019-03-26	
.XXX ± 0.05		ANGLES ± 1°		PANEL SCREW 18PIN M CONN F PIN		DWG NO		CHECKED BY		DATE	
REV. B		WC-REV. A.3		SCALE 3:2		IDD-18PMFS-SC7001		Rita		2019-03-26	
SHEET 1 OF 1		QC: Inspection item		CUSTOMER		ALTW		APPROVED BY		Max	
										2019-03-26	

Amphenol LTW
安費諾亮泰企業股份有限公司