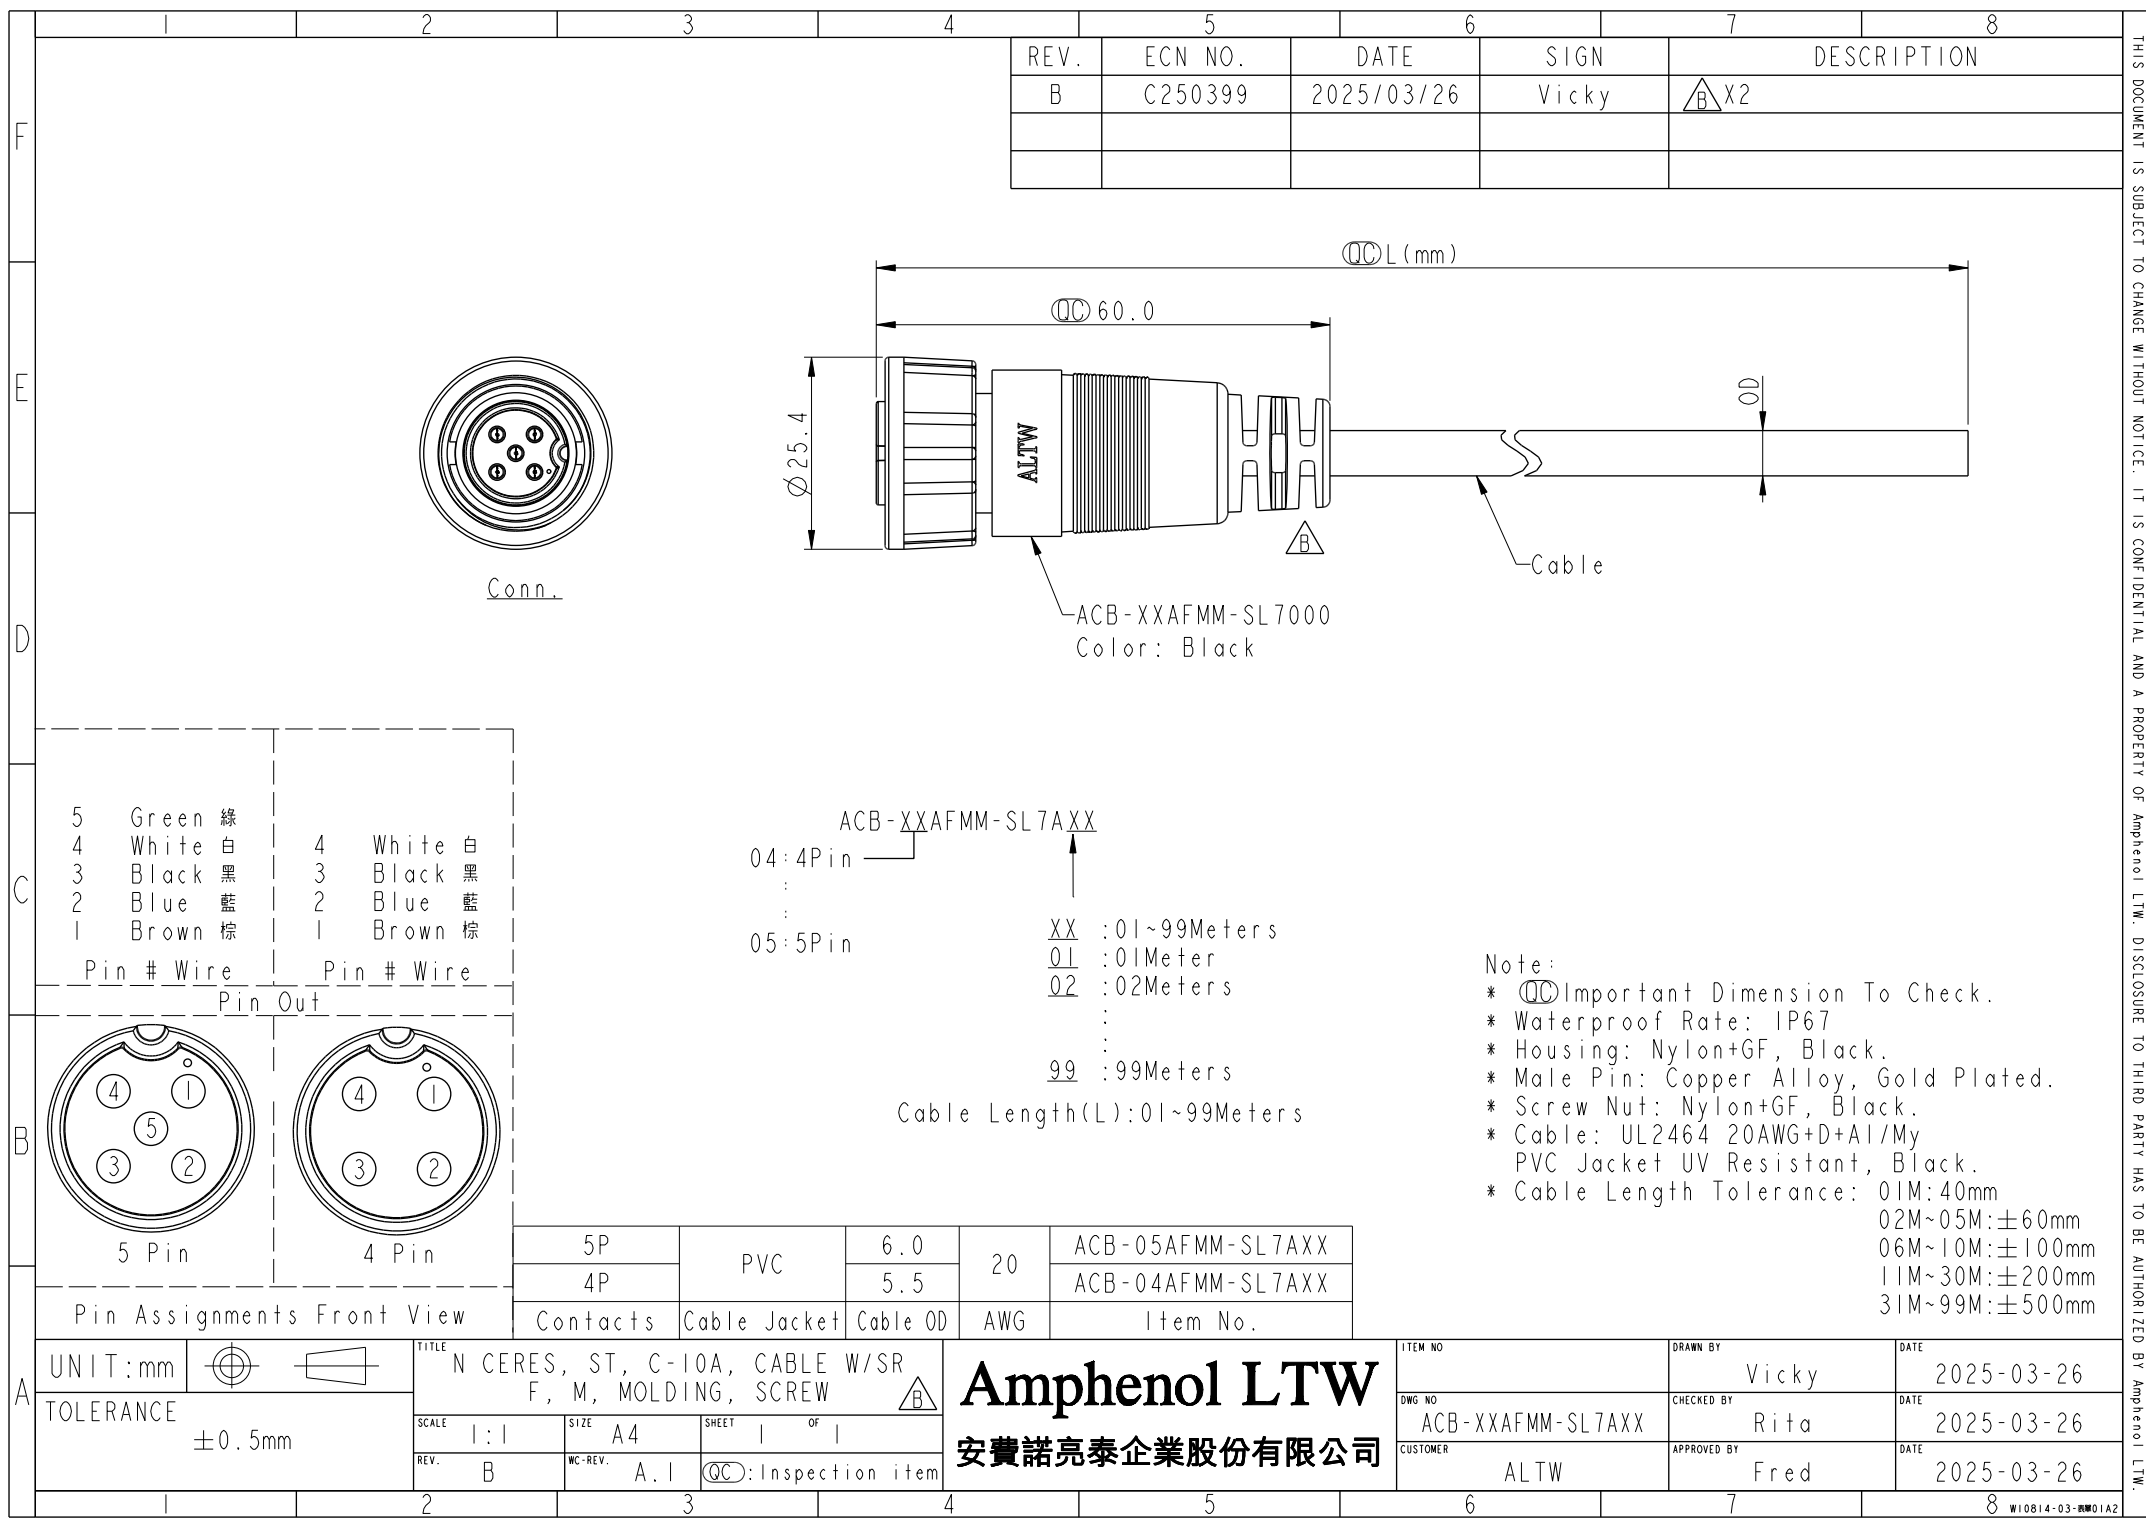
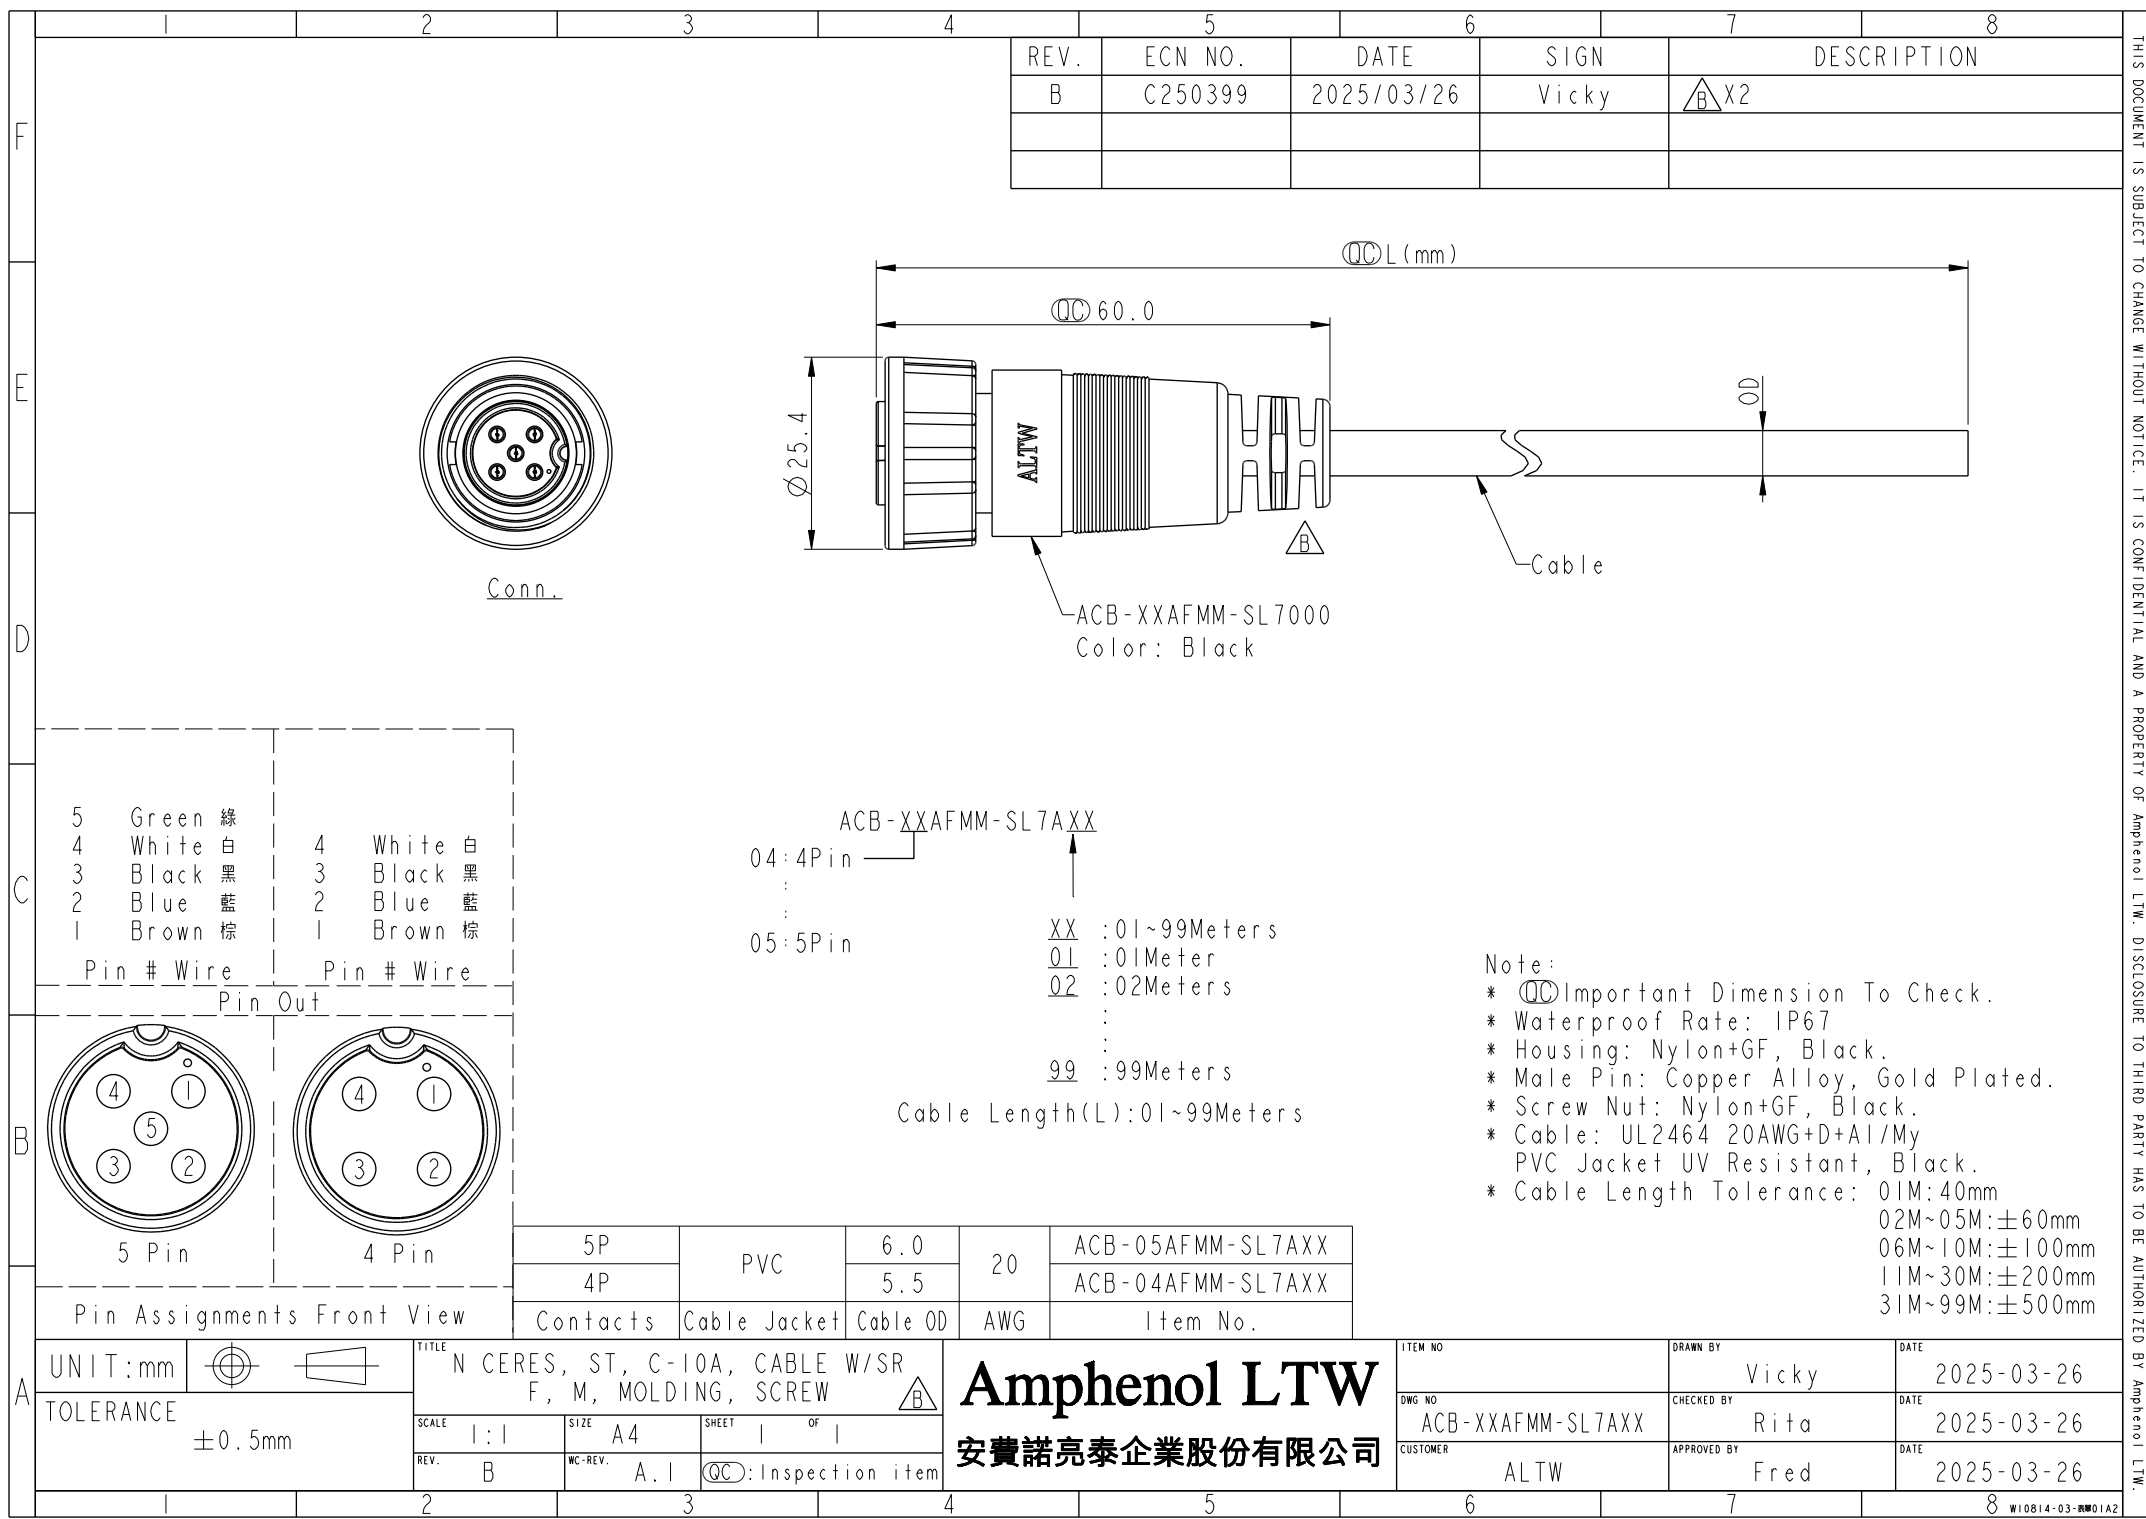


[illegible][illegible][illegible][illegible][illegible][illegible][illegible][illegible]

- [illegible]

[illegible][illegible][illegible][illegible][illegible]

	I	2	3	4	5	6	7	8																									
F					REV. B	ECN NO. C250399	DATE 2025/03/26	SIGN Vicky	DESCRIPTION X2																								
E																																	
D																																	
C	Conn.				ACB-XXAFMM-SL7000 Color: Black																												
B	<table border="1"> <thead> <tr> <th>Pin #</th> <th>Wire</th> <th>Pin #</th> <th>Wire</th> </tr> </thead> <tbody> <tr><td>5</td><td>Green 綠</td><td>4</td><td>White 白</td></tr> <tr><td>4</td><td>White 白</td><td>3</td><td>Black 黑</td></tr> <tr><td>3</td><td>Black 黑</td><td>2</td><td>Blue 藍</td></tr> <tr><td>2</td><td>Blue 藍</td><td>1</td><td>Brown 棕</td></tr> <tr><td>1</td><td>Brown 棕</td><td></td><td></td></tr> </tbody> </table> Pin Out 5 Pin 4 Pin Pin Assignments Front View				Pin #	Wire	Pin #	Wire	5	Green 綠	4	White 白	4	White 白	3	Black 黑	3	Black 黑	2	Blue 藍	2	Blue 藍	1	Brown 棕	1	Brown 棕			ACB-XXAFMM-SL7AXX 04 : 4Pin : 05 : 5Pin XX : 01~99Meters 01 : 01Meter 02 : 02Meters : 99 : 99Meters Cable Length(L):01~99Meters				
Pin #	Wire	Pin #	Wire																														
5	Green 綠	4	White 白																														
4	White 白	3	Black 黑																														
3	Black 黑	2	Blue 藍																														
2	Blue 藍	1	Brown 棕																														
1	Brown 棕																																
A	<table border="1"> <thead> <tr> <th>Contacts</th> <th>Cable Jacket</th> <th>Cable OD</th> <th>AWG</th> <th>Item No.</th> </tr> </thead> <tbody> <tr> <td>5P</td> <td rowspan="2">PVC</td> <td>6.0</td> <td rowspan="2">20</td> <td>ACB-05AFMM-SL7AXX</td> </tr> <tr> <td>4P</td> <td>5.5</td> <td>ACB-04AFMM-SL7AXX</td> </tr> </tbody> </table>				Contacts	Cable Jacket	Cable OD	AWG	Item No.	5P	PVC	6.0	20	ACB-05AFMM-SL7AXX	4P	5.5	ACB-04AFMM-SL7AXX	Note: * Important Dimension To Check. * Waterproof Rate: IP67 * Housing: Nylon+GF, Black. * Male Pin: Copper Alloy, Gold Plated. * Screw Nut: Nylon+GF, Black. * Cable: UL2464 20AWG+D+Al/My PVC Jacket UV Resistant, Black. * Cable Length Tolerance: 01M:40mm 02M~05M:±60mm 06M~10M:±100mm 11M~30M:±200mm 31M~99M:±500mm															
Contacts	Cable Jacket	Cable OD	AWG	Item No.																													
5P	PVC	6.0	20	ACB-05AFMM-SL7AXX																													
4P		5.5		ACB-04AFMM-SL7AXX																													
UNIT:mm TOLERANCE ±0.5mm					Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO DRAWN BY Vicky DWG NO ACB-XXAFMM-SL7AXX CUSTOMER ALTW		DATE 2025-03-26 CHECKED BY Rita APPROVED BY Fred																								
TITLE N CERES, ST, C-10A, CABLE W/SR F, M, MOLDING, SCREW SCALE I:1 SIZE A4 SHEET 1 OF 1 REV. B WC-REV. A.I :Inspection item					8 WI0814-03-BW01A2																												

[illegible][illegible]