REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C192041	2019-11-25	Peng	B X1
C	C231273	2023-10-05	Ruru	C X5

C
ADD-XXBFMC-LL7XP0

XX: No. Of Pin

A: With Red&Yellow&Blue Color Seal
S: With Red Color Seal, Cable OD 8.0~10.0mm.
M: With Yellow Color Seal, Cable OD 10.0~12.0mm.
L: With Blue Color Seal, Cable OD 12.0~14.0mm.

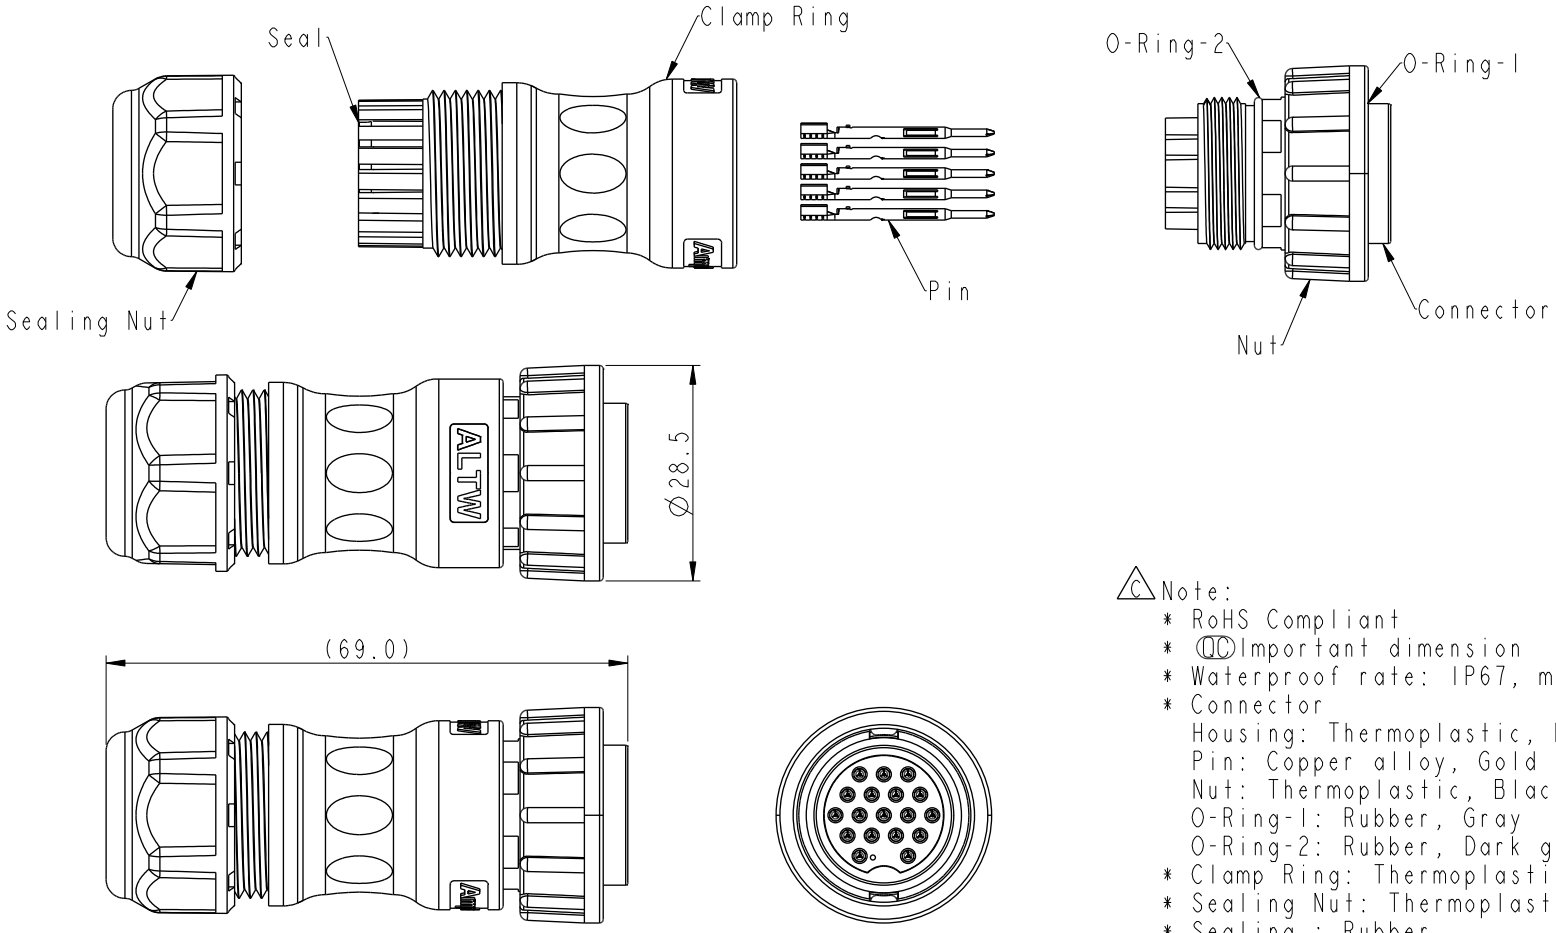



Pin Assignments
Front View

C Note:
* RoHS Compliant
* QC Important dimension
* Waterproof rate: IP67, mated
* Connector
  Housing: Thermoplastic, Black
  Pin: Copper alloy, Gold plated
  Nut: Thermoplastic, Black
  O-Ring-1: Rubber, Gray
  O-Ring-2: Rubber, Dark gray
* Clamp Ring: Thermoplastic, Black
* Sealing Nut: Thermoplastic, Black
* Sealing : Rubber
* One set unassembled in one pe bag

UNIT:mm	TITLE: N CERES, ST, D-5A, CABLE W/O SR F, M, CRIMP, 2LOCK C	Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY: Peng	DATE: 2018-12-17
TOLERANCE ±0.5 mm	SCALE: 8:5 / SIZE: A4 / SHEET 1 OF 1 C		DWG NO: C ADD-XXBFMC-LL7XP0	CHECKED BY: Mafei	DATE: 2018-12-17
	REV.: C / WC-REV.: A.3	QC: Inspection item	CUSTOMER: ALTW	APPROVED BY: Jerry	DATE: 2018-12-17

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.