



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C231273	2023-10-06	Ruru	 X5

ADD-XXBFMC-SL7XP0


XX: No. Of Pin

-A: With Red&Yellow&Blue Color Seal
-S: With Red Color Seal, Cable OD 8.0~10.0mm.
-M: With Yellow Color Seal, Cable OD 10.0~12.0mm.
-L: With Blue Color Seal, Cable OD 12.0~14.0mm.

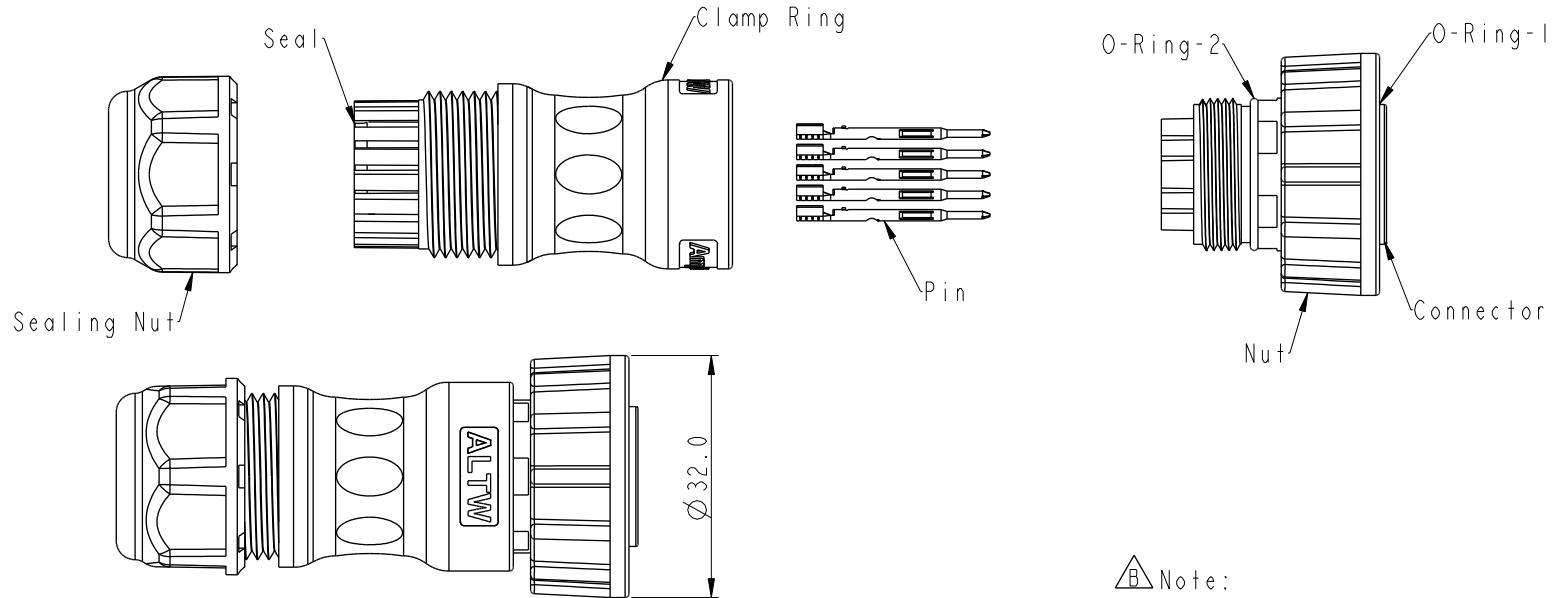

Pin Assignments

Front View

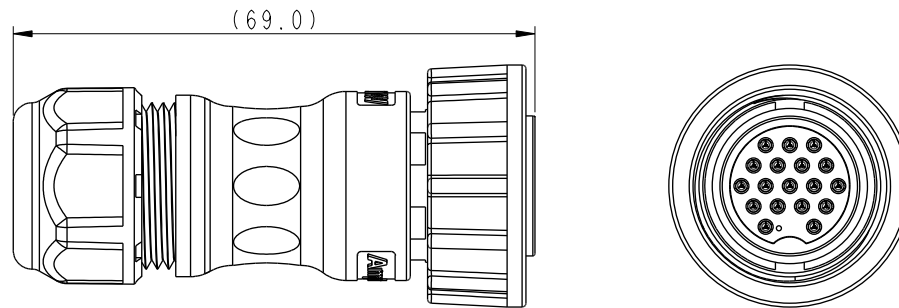

 Note:

- * RoHS Compliant
- *  Important dimension
- * Waterproof rate: IP67, mated
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Nut: Thermoplastic, Black
 - O-Ring-1: Rubber, Gray
 - O-Ring-2: Rubber, Dark gray
- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black
- * Sealing : Rubber
- * One set unassembled in one pe bag

UNIT:mm				TITLE N CERES, ST, D-5A, CABLE W/O SR F, M, CRIMP, SCREW				Amphenol LTW 安費諾亮泰企業股份有限公司				ITEM NO		DRAWN BY Peng		DATE 2018-12-15			
TOLERANCE ±0.5 mm				SCALE 8:5		SIZE A4						SHEET 1 OF 1		DWG NO ADD-XXBFMC-SL7XP0		CHECKED BY Mafei		DATE 2018-12-15	
REV. B				WC-REV. A.3		QC: Inspection item						CUSTOMER ALTW		APPROVED BY Jerry		DATE 2018-12-15			