


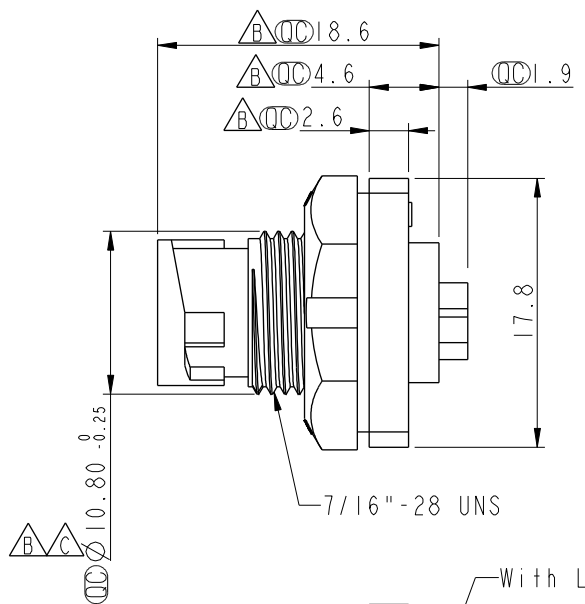



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-9C0094	2009/12/16	Vicky	REF. TO ECR/N. NOTE.
D	LEN1741236	2017/04/13	Ruru	Change Logo
E	CI90268	2019/02/18	Ruru	Modify Note


ALTW
CONFIDENTIAL
2019-02-18
R&D DEPT.



Pin Assignments
Front View

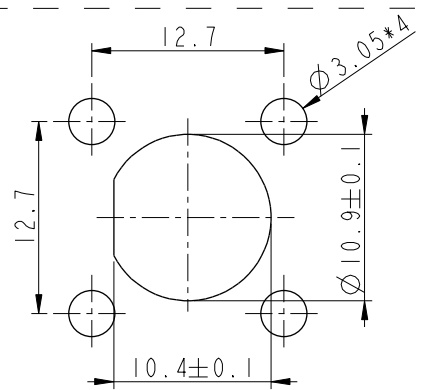

Recommended Panel Cut-Out

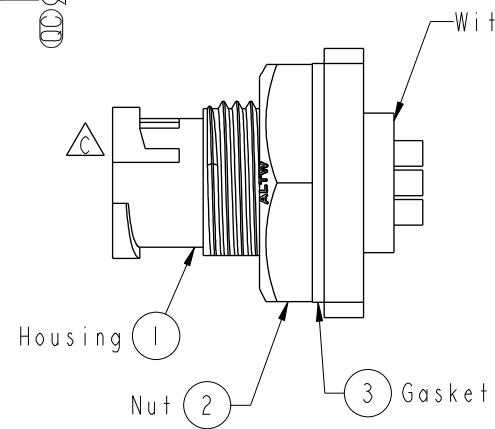

- Note:
- * Important Dimension.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Shield: Metal, Nickel Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - * Use with waterproof cap or dust cap
Panel Thickness Max. 2.5mm.
 - * Use without waterproof cap or dust cap
Panel Thickness Max. 3.5mm.
 - * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE Mini Panel Lock 6Pin M Conn. M Pin		
TOLERANCE		SCALE 2:1	SIZE A4	SHEET 1 OF 1
.X ±0.25		REV. E	WC-REV. A.2	Inspection item
.XX ±0.1				
.XXX ±0.05				
ANGLES ±1°				

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO ASU-06PMMS-LS7001	DRAWN BY Ruru	DATE 2019-02-18
DWG NO ASU-06PMMS-LS7001	CHECKED BY Rita	DATE 2019-02-18
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-02-18