

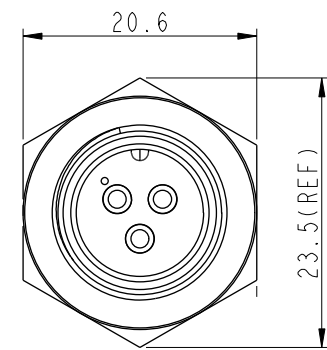
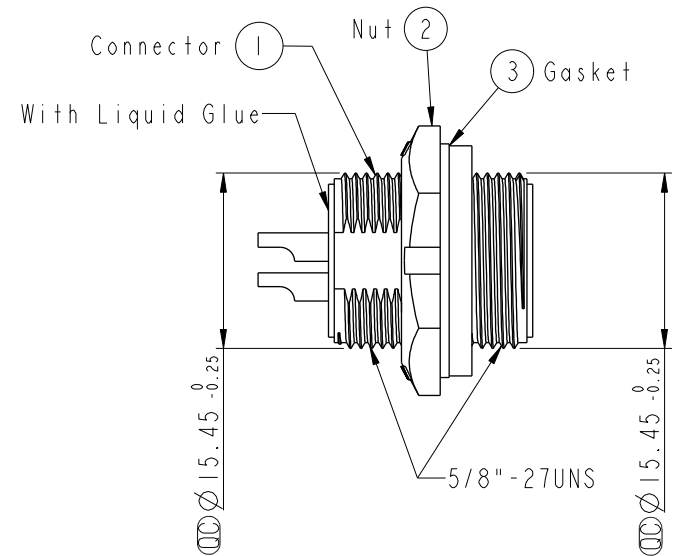



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0555	2008/09/19	Shin	Add Note and Update Drawing to New Format
C	CI90274	2019/02/20	Ruru	Modify Note & Change Logo


ALTW
CONFIDENTIAL
2019-02-20
R&D DEPT.



Pin Assignments
Front View

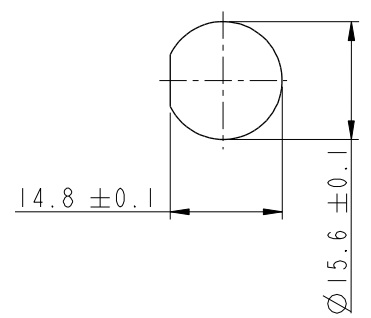

Recommended Panel Cut-Out

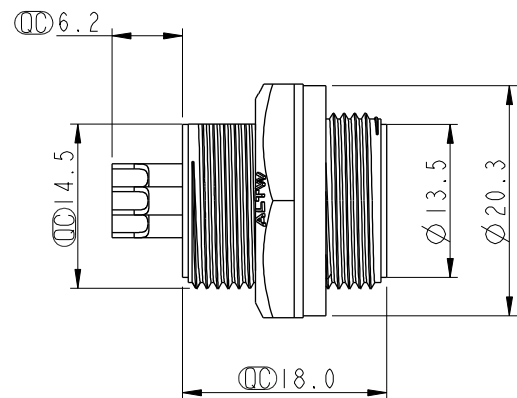

Note: $\triangle C$

- * ⌀ Important Dimension To Check.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black

- $\triangle B$ * Use with waterproof cap or dust cap
Panel Thickness Max: 4.0mm
- $\triangle B$ * Use without waterproof cap or dust cap
Panel Thickness Max: 5.0mm
- * Gasket and Nut are packed separately
in PE bags.

UNIT:mm		TITLE Standard, Rear Screw 3P M Conn M Pin			
TOLERANCE		SCALE	SIZE	SHEET	OF
.X ±0.25		1:1	A4	1	1
.XX ±0.1		REV.	WC-REV.		
.XXX ±0.05		C	A.3		
ANGLES ±1°		⌀ : Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	BB-03RMMS-SC7001	DRAWN BY	Ruru	DATE	2019-02-20
DWG NO	BB-03RMMS-SC7001	CHECKED BY	Rita	DATE	2019-02-20
CUSTOMER	ALTW	APPROVED BY	Max	DATE	2019-02-20