

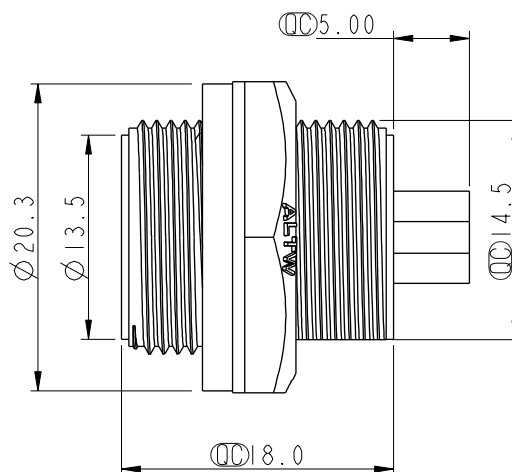
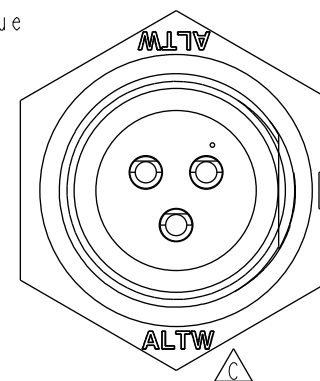
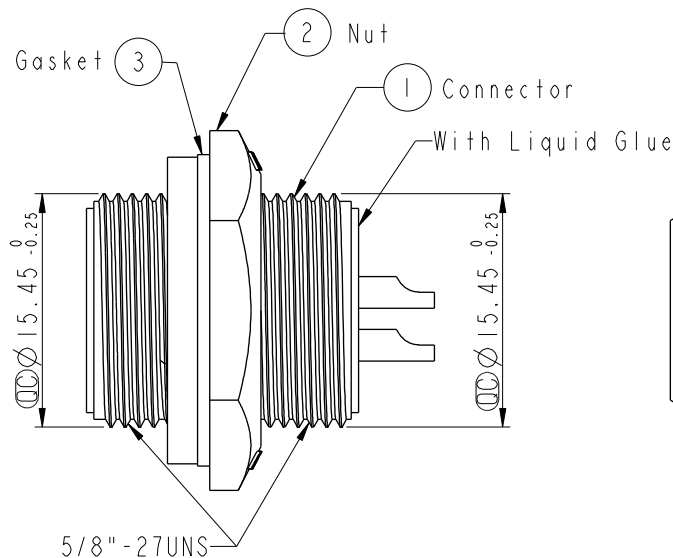


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0570	2008/09/10	Shin	Add Note
C	C190274	2019/02/22	Ruru	Modify Note & Change Logo

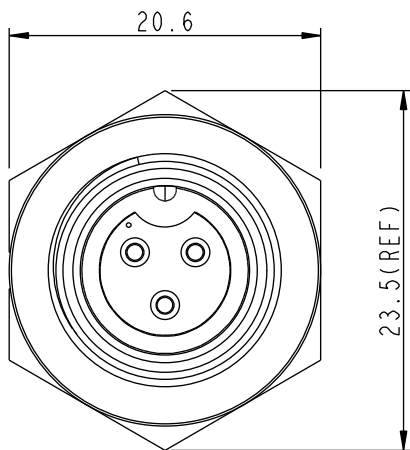


Note: $\triangle C$

- *  Important Dimension To Check.
- * Waterproof Rate: IP67, Unmated
- * Housing: Thermoplastic, Black
- * Pin: Copper Alloy, Gold Plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Black
- *  Use With Waterproof Cap Or Dust Cap
Panel Thickness Max: 4.0mm
- *  Use Without Waterproof Cap Or Dust Cap
Panel Thickness Max: 5.0mm
- * Gasket and Nut are packed separately
in PE bags.



Pin Assignments

Front View

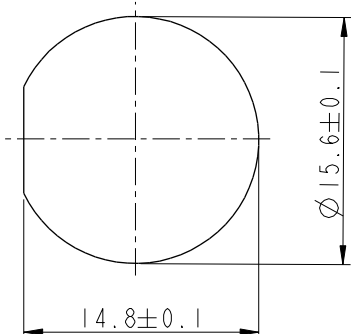

Recommended Panel Cut-out

UNIT : mm		
TOLERANCE		
.X	±0.25	
.XX	±0.1	
.XXX	±0.05	
ANGLES	+ °	

TITLE			
Standard, Rear Screw 3P M Conn F Pin			
SCALE	2:1	SIZE	A4
SHEET	1	OF	1
REV.	C	WC-REV.	A.3
QC: Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
BD-03RMFS-SC700I	Ruru	2019-02-22
DWG NO	CHECKED BY	DATE
BD-03RMFS-SC700I	Rita	2019-02-22
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2019-02-22