REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-8B0559	2008/09/19	Shin	Add Note and Change Format to Standard
C	LEN-940070	2009/03/19	LiuShuYun	Change Size 1.50 to 1.5
D	C190273	2019/02/23	Ruru	Modify Note & Change Logo

ALTW
CONFIDENTIAL
2019-02-23
R&D DEPT.

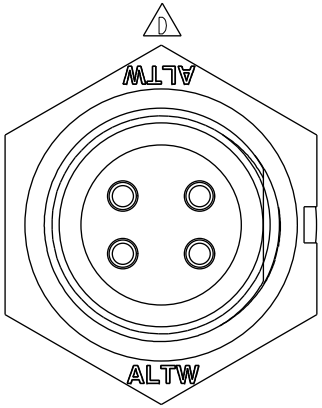

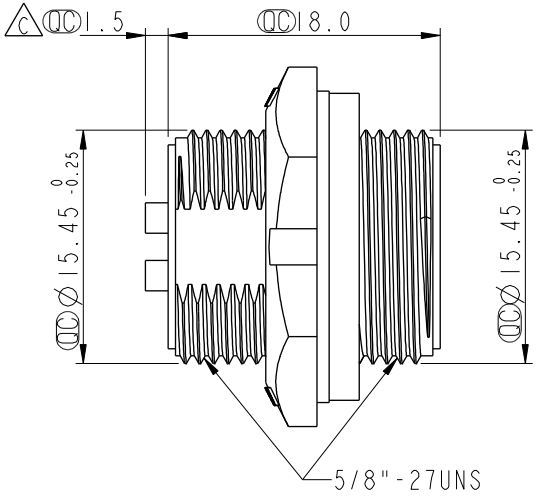

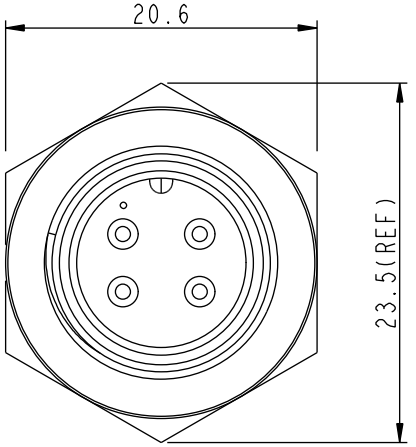



Pin Assignments
Front View

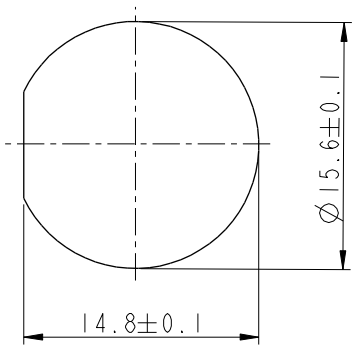

Recommended Panel Cut-out

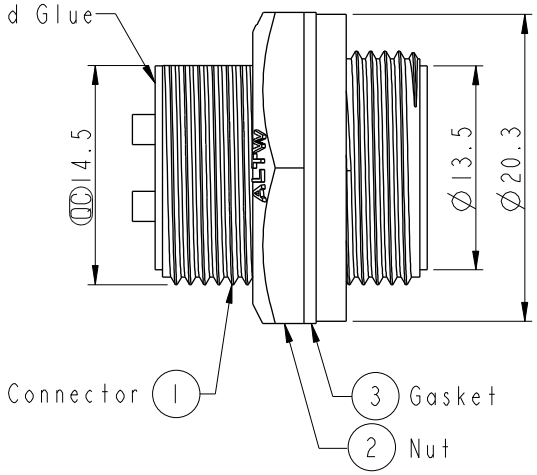

Note: D
* QC Important Dimension To Check.
* Waterproof Rate: IP67, Unmated
* Housing: Thermoplastic, Black
* Pin: Copper Alloy, Gold Plated
* Nut: Thermoplastic, Black
* Gasket: Rubber, Black
B * Use With Waterproof Cap Or Dust Cap
Panel Thickness Max: 4.0mm
B * Use Without Waterproof Cap Or Dust Cap
Panel Thickness Max: 5.0mm
* Gasket and Nut are packed separately in PE bags.

UNIT: mm

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°

TITLE: Standard, Rear Screw 4P M Conn M Pin
SCALE: 2:1 | SIZE: A4 | SHEET: 1 OF 1
REV.: D | WC-REV.: A.3 | QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
BD-04RMMS-SC7001	Ruru	2019-02-23
DWG NO: BD-04RMMS-SC7001	CHECKED BY: Rita	DATE: 2019-02-23
CUSTOMER: ALTW	APPROVED BY: Max	DATE: 2019-02-23

W10814-03-RW01A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.