

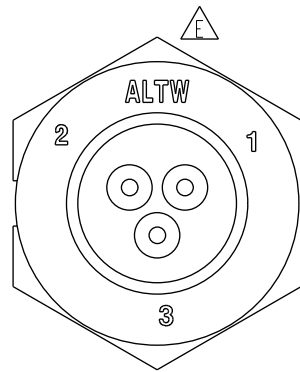
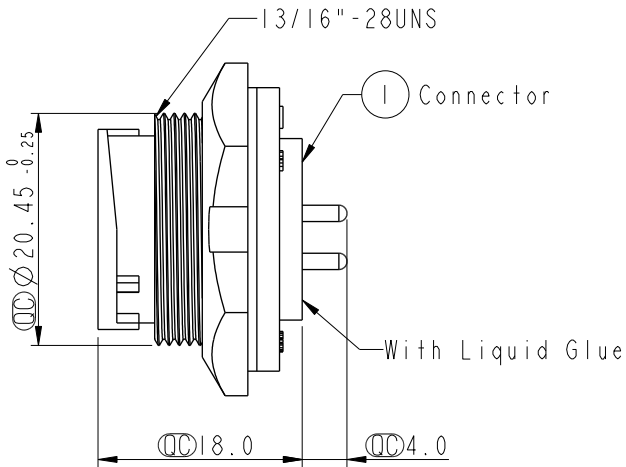
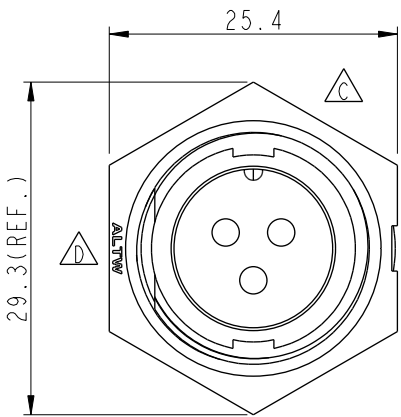


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN-090205	2010/09/07	WuHaiYan	Delete Logo
D	C190271	2019/02/27	Ruru	Modify Note & Change Logo
E	C251024	2025/08/11	Ruru	E X2

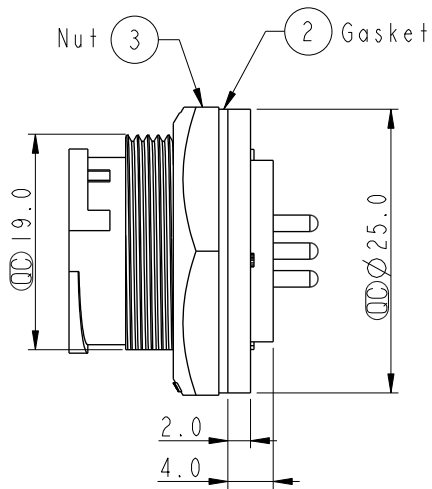

3Pin Male Connector
Female Pin PCB Layout

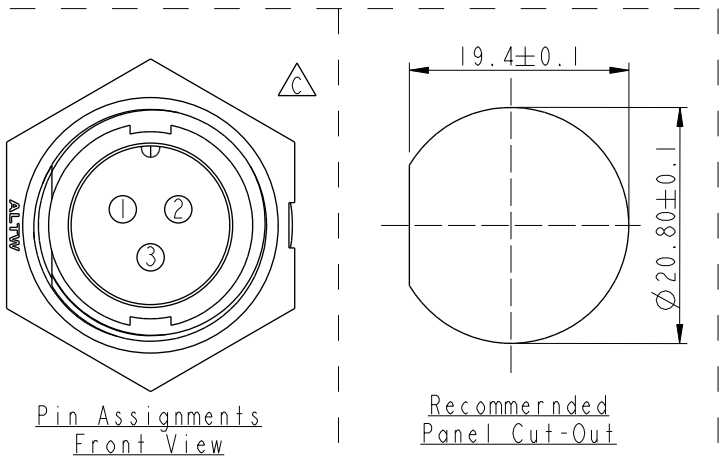

- Note: D
- * CC Important Dimension.
 - * Waterproof Rate: IP67, Unmated
 - * Housing: Thermoplastic, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Nut: Thermoplastic, Black
 - * Gasket: Rubber, Black
 - B * Use with waterproof cap or dust cap
Panel Thickness Max: 3.0mm
 - B * Use without waterproof cap or dust cap
Panel Thickness Max: 4.0mm
 - * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE O CERES, C-20A, 03P, FRONT FASTENED M, M, PCB S, 2LOCK		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO CC-03PMMP-LC7001	DRAWN BY Ruru	DATE 2025-08-11
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 1:1	SIZE A4	SHEET 1 OF 1	DWG NO CC-03PMMP-LC7001	CHECKED BY Vicky	DATE 2025-08-11	DATE 2025-08-11
REV. E		WC-REV. A.2	CC : Inspection item		CUSTOMER ALTW	APPROVED BY Rita	DATE 2025-08-11	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.