REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1150092~95	2011/04/22	Ruru	Modify Nut View.
C	C230547	2023/04/21	Matt	Add Pin Out Shell △C ×1

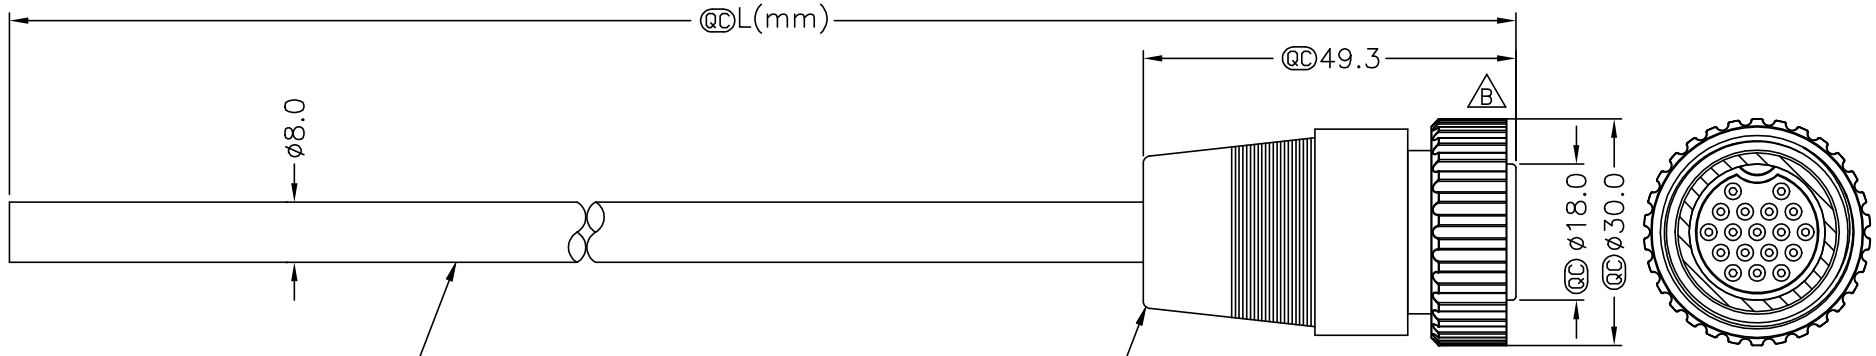

DSD-18BFMM-SL6AXX

XX :01~99Meter
01 :01Meter
02 :02Meters
:
:
99 :99Meters
Cable Length(L):01~99Meters



Pin Assignments
Front View

Conn.	Wire Color	Conn.	Wire Color
		Shell	Drain
9	Black	18	Blue/White
8	Red	17	Green/White
7	Pink	16	Orange/White
6	Gray	15	Red/White
5	Yellow	14	Brown/White
4	Green	13	Black/White
3	White	12	Light Green
2	Blue	11	Purple
1	Brown	10	Orange
Pin Out		Pin Out	

△C

Note:
* QC Important Dimension To Check.
* Waterproof Rate: IP66
* Housing: Black, Nylon+GF
* Pin: Copper Alloy, Gold Plated
* Cable: UL2464 24AWG*18C+Drain+Al/My,
  Black PVC Jacket (UV Resistant) OD=8.0mm
* Cable Length Tolerance:1M~10M±5%mm,11M~99M±500mm.

UNIT:mm	TITLE: Large Cable Screw 18Pin F Conn M Pin	ITEM NO	DRAWN BY: Ruru / DATE: 2011/04/22
TOLERANCE: ±0.5 mm	SCALE: Free / SHEET: 1 OF 1	DWG NO: DSD-18BFMM-SL6AXX	CHECKED BY: Rita / DATE: 2011/04/22
	REV.: C / SIZE: A4 / QC :Inspection Item	CUSTOMER: ALTW	APPROVED BY: Luke / DATE: 2011/04/22

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

FMWI0702-01-01A2