
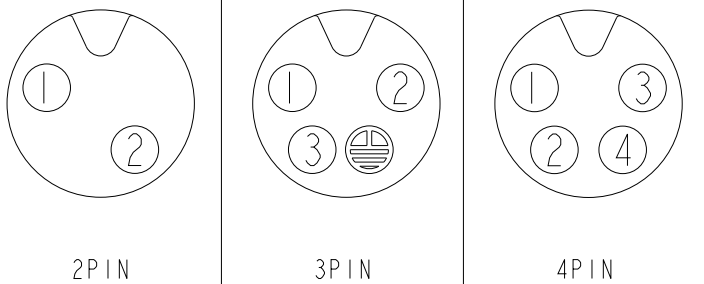


- *  Important Dimension.
- * Waterproof Rate: IP68 (Mating, 1M/24 Hours)
- * Housing: Thermoplastic, Black.
- * Female Pin: Copper Alloy. Gold Plated.
- * Seal: Rubber, Black or Dark Gary.
- * Seal Of Cable OD: $\varnothing 5.5\text{mm} \sim \varnothing 6.0\text{mm}$
- * Seal Nut: Thermoplastic, Black.
- * Gasket: Rubber, Black or Dark Gary.
- * Clamp Ring: Thermoplastic, Black.
- * Holder: Thermoplastic, Black.
- * Seal Nut Torque: 3.0 ~ 5.0 kgf-cm.



Pin Assignments, Front View

UNIT:mm		TITLE HS LOK, Q8-5A, CABLE W/O SR F, F, FI SOLDER, HS LOCK			Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Na Liu	DATE 2024/04/10
TOLERANCE ±0.5 mm		SCALE 1:1	SIZE A4	SHEET 1 OF 1		DWG NO Q8D-XXBFFA-QL8001	CHECKED BY Fisher Wang	DATE 2024/04/10
		REV. A	MC-REV. A.1	QC: Inspection item		CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2024/04/10