
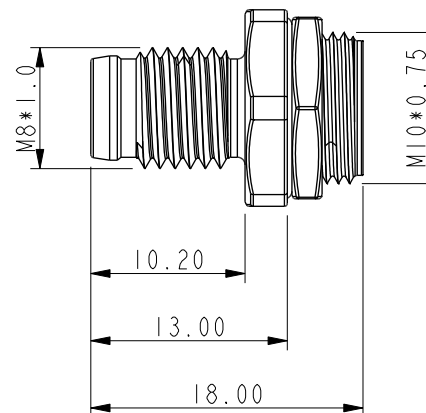


1	2	3	4	5	6	7	8
---	---	---	---	---	---	---	---

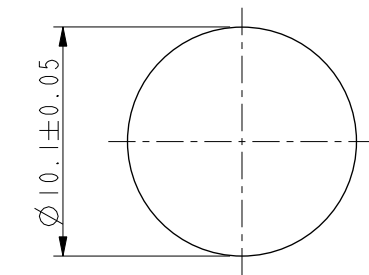

Note:

- 1.Shell: Metal.
- 2.Nut: Metal.
- 3.Panel O-Ring: Rubber, Black.
- 4.For Panel Thickness Max 3mm.
- 5.Recommended Nut Torque: 4-6kgf.cm.

UNIT: mm				TITLE M8 SMT Male Rear Fastened Hexagonal Nut Package				Amphenol LTW 安費諾亮泰企業股份有限公司				ITEM NO APPM-AAAMA008-002		DRAWN BY Allen Pan		DATE 2020-10-20			
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°				SCALE 2:1		SIZE A4						SHEET 1 OF 1		DWG NO APPM-AAAMA008-002		CHECKED BY Sam Ho		DATE 2020-10-20	
				REV. A		WC-REV. A.1						QC: Inspection item		CUSTOMER ALTW		APPROVED BY Fred Lee		DATE 2020-10-20	

W10814-03-西醫01A2