

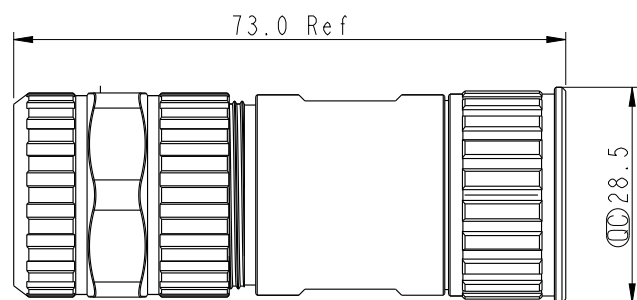
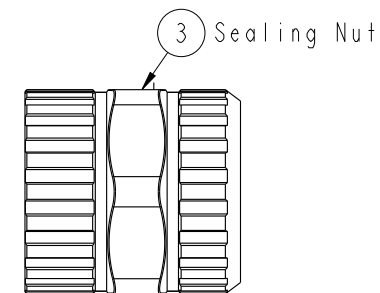


Conn.




Conn.
Pin Assignments
Front View

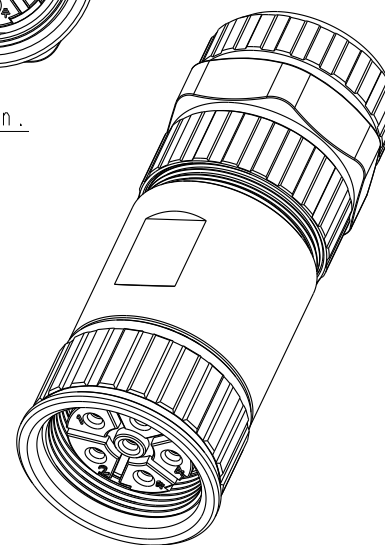


Note:

- * **①** Important Dimension.
- * Waterproof Rate: IP67.
- * Connector: Nylon, Black.
- * Female Pin: Copper Alloy, Gold Plated.
- * Screw Nut: Copper Alloy, Nickel Plated.
- * Gasket: Silicone, UL94V-0, Gray
- * Recommended Gauge: 14Awg
- * Cable OD: B1: $\varnothing 8.5 \sim \varnothing 12\text{mm}$;
B2: $\varnothing 12 \sim \varnothing 17.5\text{mm}$



UNIT: mm			TITLE M23 Panel ASS'Y Type, F CON, F PIN			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO LJ23-06DFFC-SL7002		DRAWN BY Tom		DATE 2016-05-20		
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±			SCALE 1:1		SIZE A4			SHEET 1 OF 2		DWG NO LJ23-06DFFC-SL7002		CHECKED BY Jeffrey		DATE 2012-09-18
			REV. A		WC-REV. A.1		QC: Inspection item		CUSTOMER ALTW		APPROVED BY Maslow		DATE 2012-09-18	

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2016-05-20	Tom	Change REV.01 to REV.A

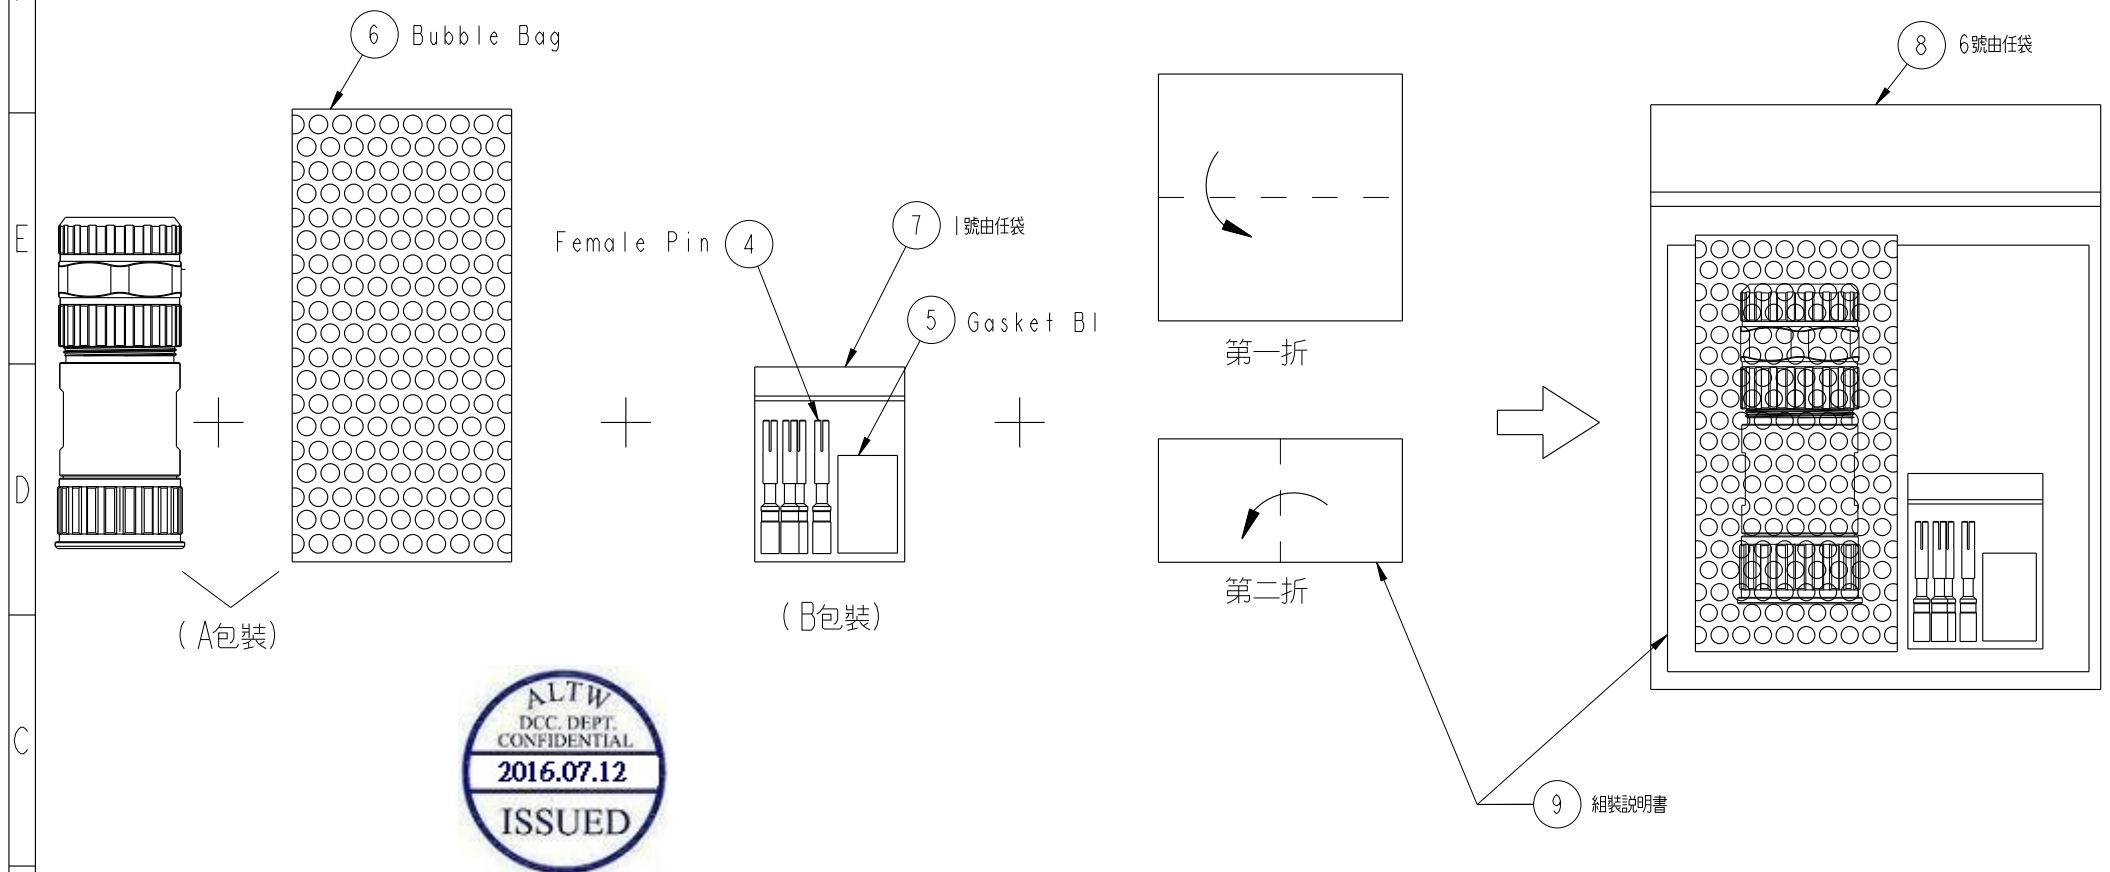

包裝方式

A 包裝 將 ① ② ③ 組裝完成後裝入 ⑥ 氣泡袋中

B 包裝 將 ④ ⑤ 裝入 ⑦ 號由任袋中

最後將 A 包裝與 B 包裝及 ⑨ 組裝說明書一同裝入 ⑧ 6 號由任袋中，即放入紙箱

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
TOLERANCE		M23 Panel ASS'Y Type, F CON, F PIN		LJ23-06DFFC-SL7002		Tom		2016-05-20	
SCALE		SIZE		DWG NO		CHECKED BY		DATE	
1:1		A4		LJ23-06DFFC-SL7002		Jiazhen		2016-05-20	
REV.		WC-REV.		CUSTOMER		APPROVED BY		DATE	
A		A.1		ALTW		Jerry		2016-05-20	
OC: Inspection item									

Amphenol LTW
安費諾亮泰企業股份有限公司