

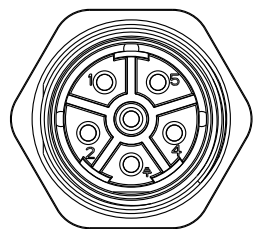



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1660817	2016-06-24	Tom	Change Note
C	LEN1810128	2018-01-17	Ethan	Define Minimum Panel Thickness
D	C202066	2020-12-30	FU	 *1

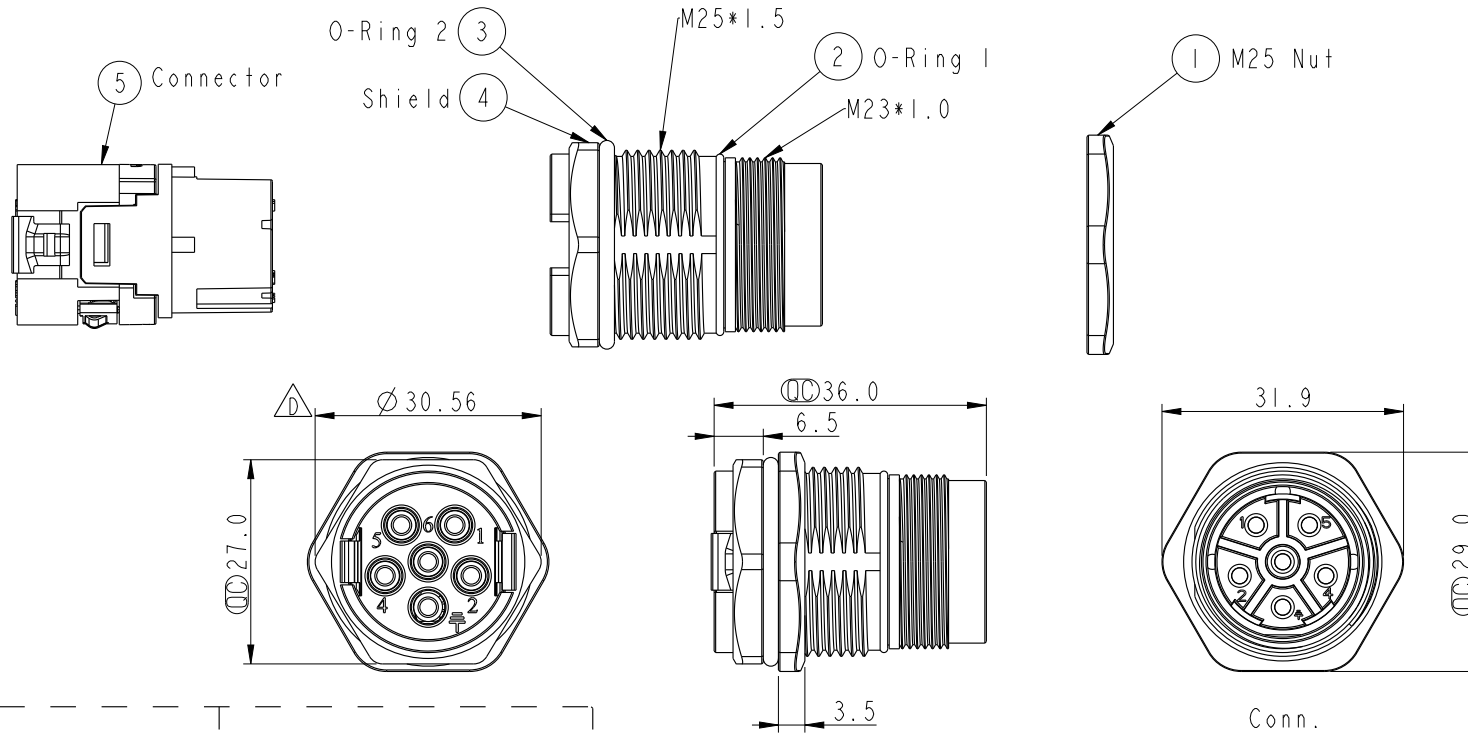

Conn.
Pin Assignments
Front View



Recommended
Panel Cut-Out



Note:

- *  Important Dimension.
- * Waterproof Rate: IP67.
- * Connector: Nylon, Black.
- * Female Pin: Copper Alloy, Gold Plated.
- * Shield: Copper Alloy, Nickel Plated.
- * O-Ring: Silicone, UL94V-0, Gray.
- * Recommended Gauge: 12 Awg.
- *  Use without waterproof cap or dust cap
- Panel Thickness Max: 6.0mm.
- Panel Thickness Min: 2.0mm.

UNIT:mm				Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO LJ23-06PMFC-SF7001		DRAWN BY Ethan		DATE 2018-01-17	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±		TITLE M23 Panel ASS'Y Type, M CON, F PIN				DWG NO LJ23-06PMFC-SF7001		CHECKED BY Feng Li		DATE 2018-01-17	
		SCALE 1:1	SIZE A4			SHEET 1 OF 2	CUSTOMER ALTW		APPROVED BY Jerry		DATE 2018-01-17
		REV. D	WC-REV. A.5	QC: Inspection item							

