


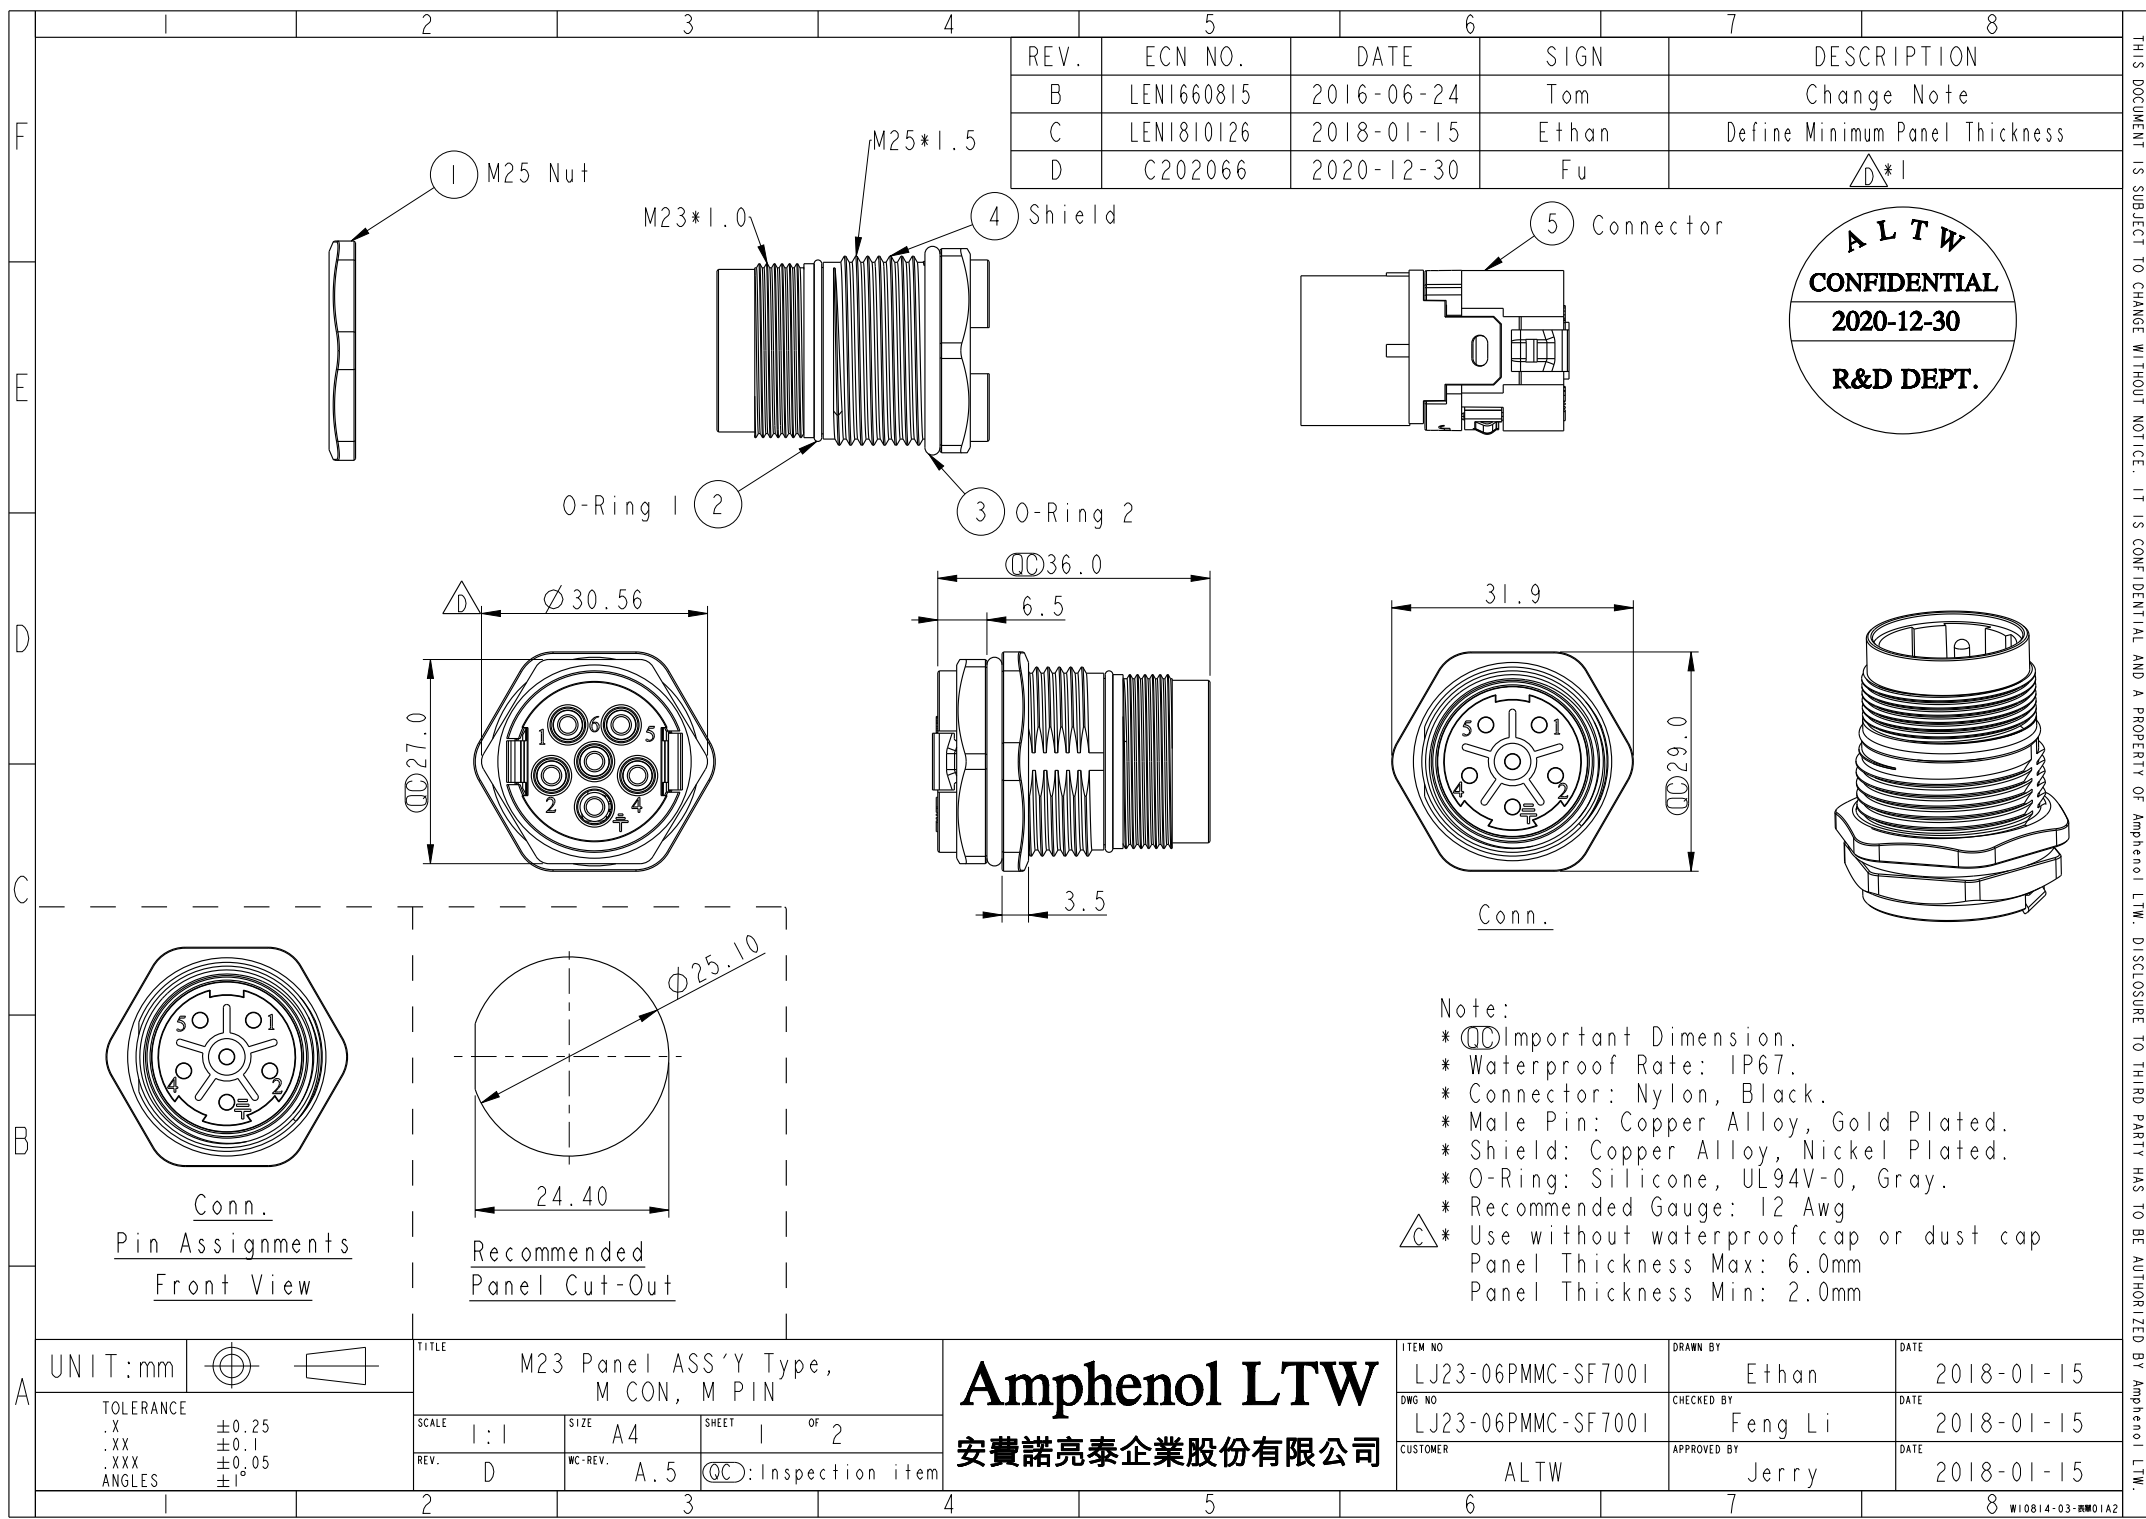

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1660815	2016-06-24	Tom	Change Note
C	LEN1810126	2018-01-15	Ethan	Define Minimum Panel Thickness
D	C202066	2020-12-30	Fu	$\triangle D^*1$

ALTW
CONFIDENTIAL
2020-12-30
R&D DEPT.


Note:
* CC Important Dimension.
* Waterproof Rate: IP67.
* Connector: Nylon, Black.
* Male Pin: Copper Alloy, Gold Plated.
* Shield: Copper Alloy, Nickel Plated.
* O-Ring: Silicone, UL94V-0, Gray.
* Recommended Gauge: 12 Awg
 $\triangle C$ * Use without waterproof cap or dust cap
Panel Thickness Max: 6.0mm
Panel Thickness Min: 2.0mm

UNIT:mm		TITLE M23 Panel ASS'Y Type, M CON, M PIN		ITEM NO LJ23-06PMMC-SF7001		DRAWN BY Ethan		DATE 2018-01-15	
TOLERANCE .X ± 0.25 .XX ± 0.1 .XXX ± 0.05 ANGLES $\pm 1^\circ$		SCALE 1:1		DWG NO LJ23-06PMMC-SF7001		CHECKED BY Feng Li		DATE 2018-01-15	
REV. D		SIZE A4		CUSTOMER ALTW		APPROVED BY Jerry		DATE 2018-01-15	
		WC-REV. A.5							
		SHEET 1 OF 2							
		CC : Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

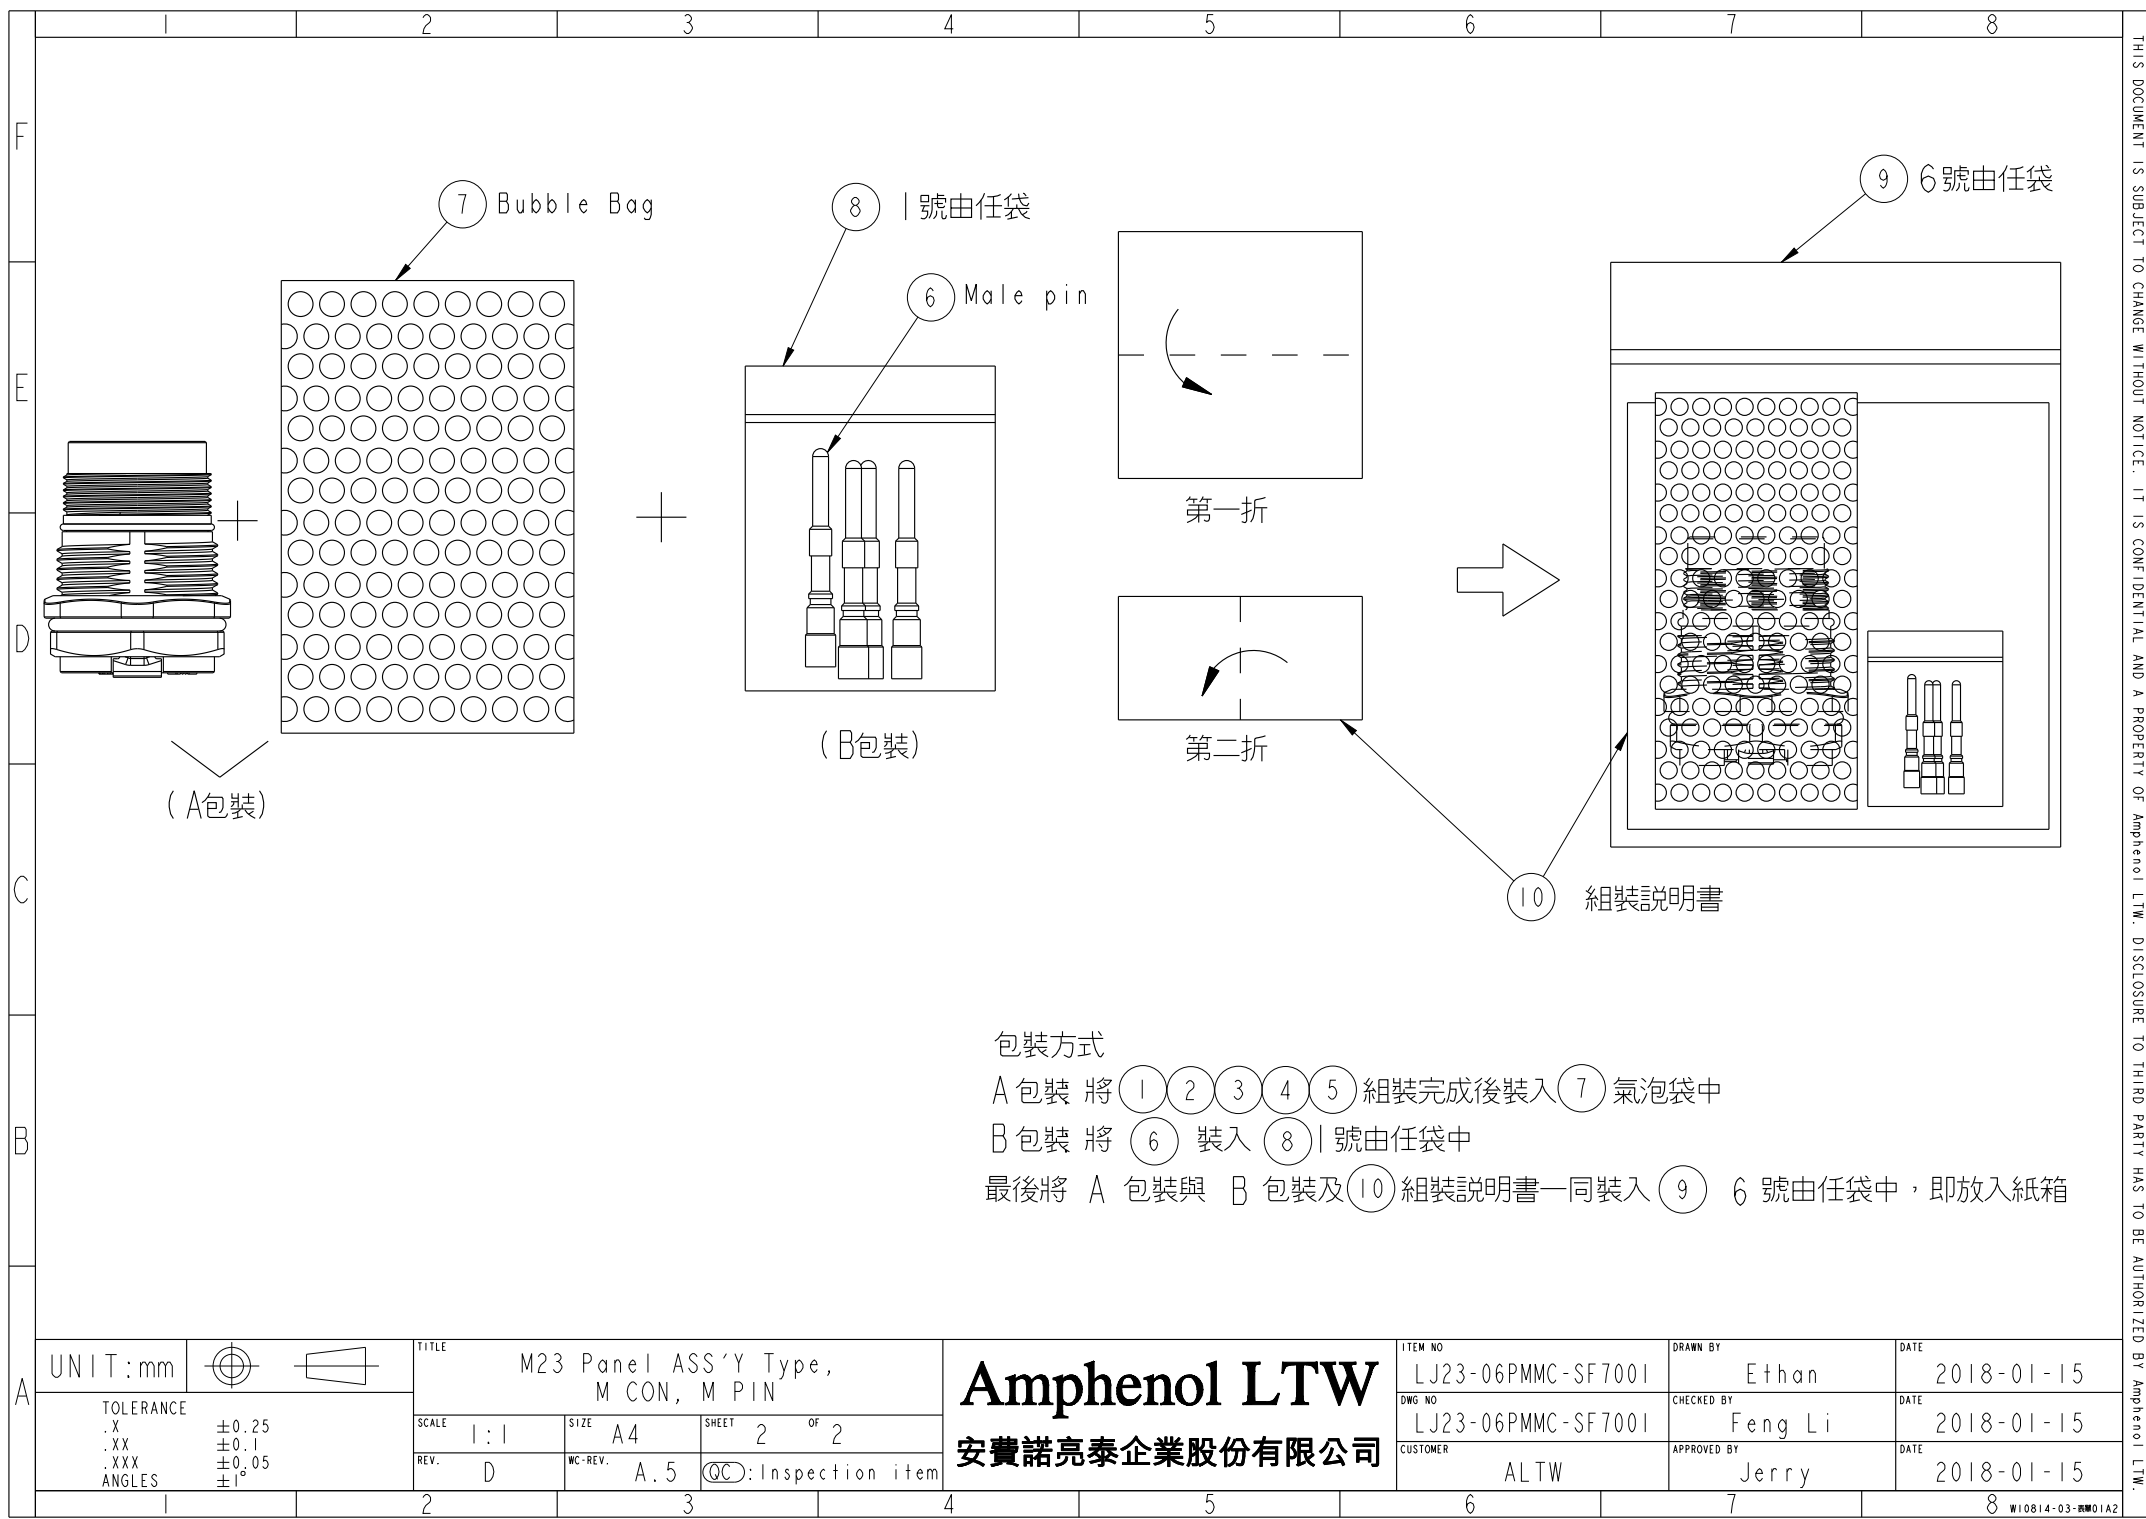

包裝方式

A 包裝 將 (1) (2) (3) (4) (5) 組裝完成後裝入 (7) 氣泡袋中

B 包裝 將 (6) 裝入 (8) 號由任袋中

最後將 A 包裝與 B 包裝及 (10) 組裝說明書一同裝入 (9) 6 號由任袋中，即放入紙箱

A	UNIT:mm				TITLE M23 Panel ASS'Y Type, M CON, M PIN			Amphenol LTW			ITEM NO LJ23-06PMMC-SF7001		DRAWN BY Ethan		DATE 2018-01-15												
	TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°				SCALE 1:1		SIZE A4		SHEET 2 OF 2		DWG NO LJ23-06PMMC-SF7001			CHECKED BY Feng Li		DATE 2018-01-15											
					REV. D		WC-REV. A.5		QC: Inspection item			CUSTOMER ALTW			APPROVED BY Jerry		DATE 2018-01-15										
1				2			3			4			5			6			7			8			WI0814-03-00001A2		