

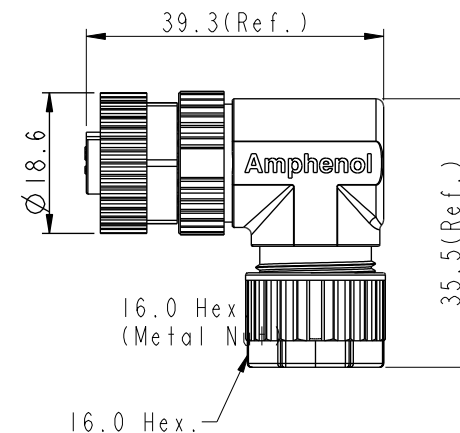



XX: No. Of Pin



Pin Assignments Front View

UNIT: mm



TOI FRANCE

.X	± 0.25
.XX	± 0.1
.XXX	± 0.05
ANGLES	$\pm 1^{\circ}$

TITLE	N SEN, M12 B, SCREW
	CABLE W/O SR. F. F. FI SCREW IN

SCALE 1:1	SIZE A4	SHEET 1 OF 1
REV. D	WC-REV. A.1	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	Mila	2015-10-09
 MI2B-XXBFFB-SR7001	Cary	2015-10-09
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2015-10-09

Diagram showing two triangles, B and C, sharing a common vertex and base line.

Note:

- * RoHS Compliant
- *  Important Dimension
- * Waterproof rate: IP67, mated
- * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Extension Nut: Thermoplastic, Black
 - Nut: Metal
 - O-Ring: Rubber, Gray
- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black
- * Seal: Rubber, Gray, OD: $\varnothing 4.0\text{mm}-\varnothing 7.0\text{mm}$
- * One set unassembled in one pe bag