

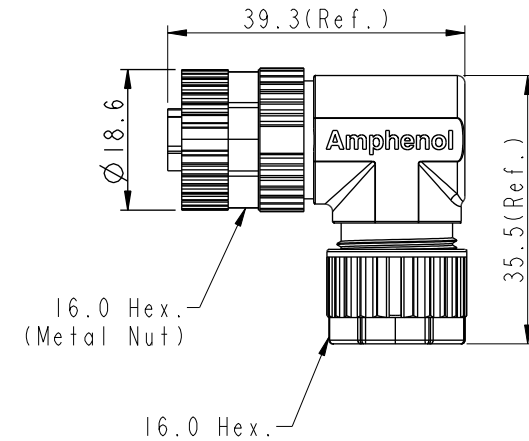

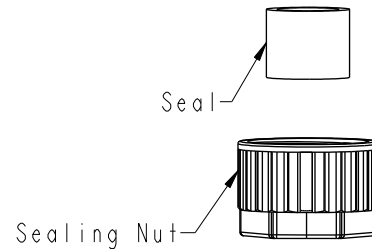


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	C210561	2021/04/12	Vicky	 X2
F	C210977	2021/06/23	Vicky	 X1
G	C221877	2022/12/09	Ruru	 X1


MI2D-XXBFFC-SR700I

XX: No. Of Pin

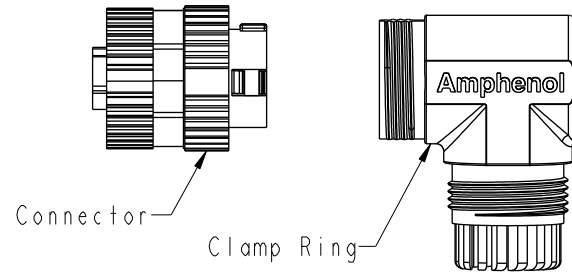


4P

Pin Assignments Front View



PE Bag

UNIT: mm



TOLERANCE	
.X	± 0.25
.XX	± 0.1
.XXX	± 0.05
ANGLES	$\pm 1^{\circ}$

	TITLE		
	N SEN, M12 D, SCREW CABLE W/O SR, F, F, F/PANEL CRIMP		
	SCALE	SIZE	SHEET OF
	Free	A4	1 of 1
	REV.	WC-REV.	QC: Inspection item
	G	0	

TITLE	
-------	--

N SEN, M12 D, SCREW 
CABLE W/O SR, F, F, FI/PANEL CRIMP

SCALE	Free
-------	------

SIZE	A4
------	----

SIZE	A4
------	----

SIZE	A4
------	----

SHEET

SHEET

OF

OF

REV.

G

WC-REV.

0

Q	Q
---	---

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Xiaofeng	2019/12/18
DWG NO	CHECKED BY	DATE
M12D-XXBFFC-SR7001	Li-Feng	2019/12/18
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2019/12/18

$\triangle E$

Note:

- * RoHS Compliant
- * **QC** Important Dimension

 * Waterproof rate: IP67, mated
* Connector

Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
Extension Nut: Thermoplastic, Black
Nut: Metal

 O-Ring: Rubber, Gray

- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black

* Seal: Rubber, Gray, OD: $\varnothing 4.0\text{mm} \sim \varnothing 7.0\text{mm}$
 * Applicable wire gauge: 20AWG~24AWG
 * One set unassembled in one pe bag