



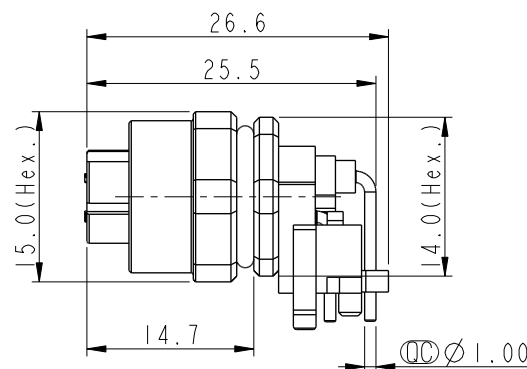



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	C211844	2021/12/03	Vicky	△ XI
F	C220593	2022/04/12	Jiahe Lin	△ XI
G	C221973	2022/12/22	Ruru	△ XI




Recommended
Panel Cut-Out

△ MI2D-XXPFFR-SF7003
XX: No. Of Pin

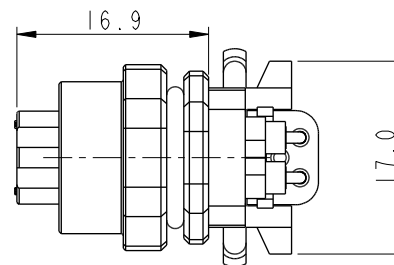


4P

Pin Assignment
Front View

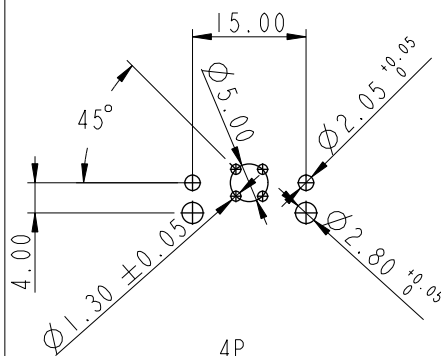

4P

PCB Layout

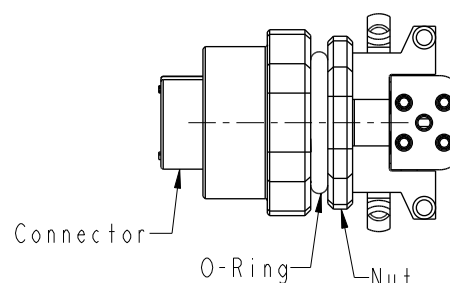

Note: △ C △ D

* RoHS Compliant

* △ (C) Important dimension

* △ G Waterproof rate: IP67, mated
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated

* △ F O-Ring1: Rubber, Gray
O-Ring2: Rubber, Gray

Nut: Metal

* Nut: Metal

* O-Ring: Rubber, Gray

* For panel thickness max: 3.0mm

* △ B For pcb thickness max: 1.6mm

* △ E Connector nut is packed separately in pe bag

UNIT:mm		TITLE	N SEN, MI2 D, SCREW RECEPTACLE, F, F, PCB R △		
TOLERANCE		SCALE	3:2	SIZE	A4
.X	±0.25	REV.	G	WC-REV.	A.1
.XX	±0.1	SHEET 1 OF 1			
.XXX	±0.05	△ (C) Inspection item			
ANGLES	±1°				

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Yulong_wang	2016-11-10
DWG NO	CHECKED BY	DATE
△ MI2D-XXPFFR-SF7003	Jinhai	2016-11-10
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2016-11-10