



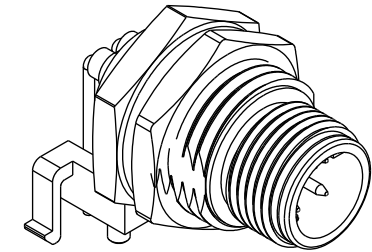
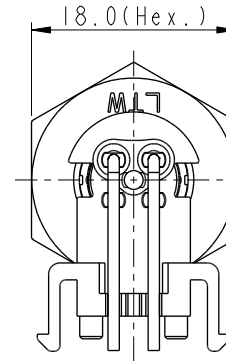


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
E	C210309	2021/03/03	Ruru	 X2
F	C221973	2022/12/26	Ruru	 X1
G	C231034	2023/08/09	Ruru	 X1

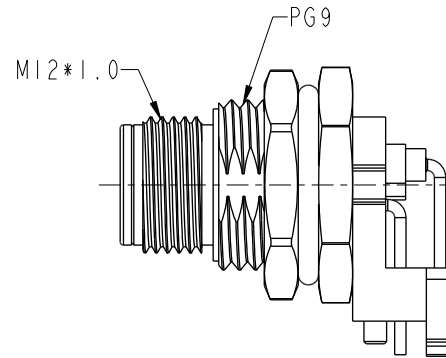


MI2D-XXPMMR-SF800I
XX: No. Of Pin

Recommended
Panel Cut-Out




4P

Pin Assignment Front View

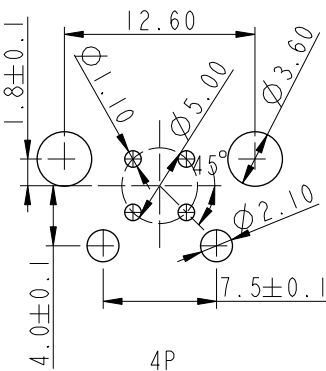

Layout


PCB Layout

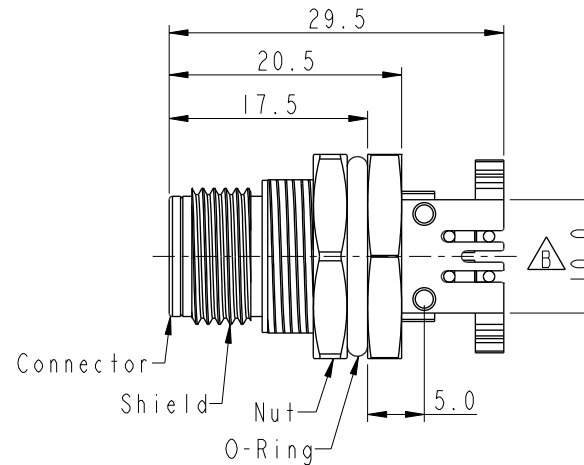

△C△E Note:

- * RoHS Compliant
- * △QC Important dimension
- △F* Waterproof rate: IP68, unmated 1m/24h
- △G IP69K, mated
- * Connector
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
- △D* Shield: Metal
- △D* Nut: Metal
- * O-Ring: Rubber, Black
- * For panel thickness max: 4.5mm
- * For pcb thickness max: 1.6mm
- * Nut is packed separately in pe bag

UNIT: mm



TITLE	N SEN, M12 D, SCREW RECEPTACLE, M, M, PCB R	 
-------	--	---

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Nan_Su	2019-08-14
DWG NO	CHECKED BY	DATE
 MI2D-XXPMMR-SF8001	Feng_Li	2019-08-14
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2019-08-14