



F										
E										
D										
C										
B										
A										


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C210561	2021/04/15	Vicky	X4
C	C221877	2022/12/09	Ruru	X1

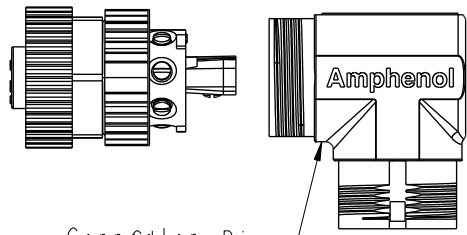


Connät Ring




O-Ring




Clamp Cage



Seal




Sealing Nut




MSAS-XXBFFB-SR7001

XX: No. Of Pin

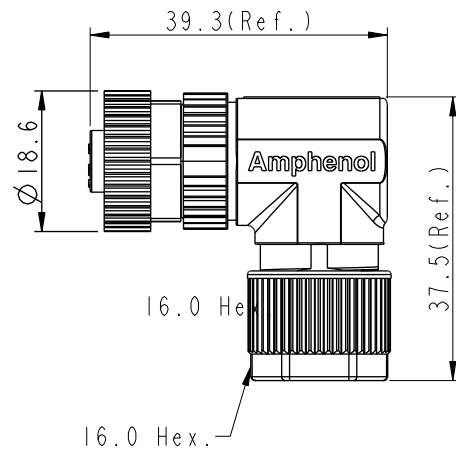


Note:


- * RoHS Compliant
- * Important Dimension
- * Waterproof rate: IP67, mated
- * Connector
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
- Extension Nut: Metal
- Nut: Metal
- O-Ring: Rubber, Gray
- * Clamp Ring: Metal
- * O-Ring: Rubber, Gray
- * Clamp Cage: Thermoplastic, Black
- * Sealing Nut: Metal
- * Seal: Rubber, Gray, OD:Ø4.0mm~Ø7.0mm
- * One set unassembled in one pe bag




3P



4P



5P



8P

Pin Assignments Front View

UNIT:mm				TITLE			
TOLERANCE			N SEN, M12 A -SHLD, SCREW				
.X			CABLE W/O SR, F, F, FI SCREW IN				
.XX			SCALE	SIZE	SHEET	OF	
.XXX			REV.	WC-REV.	QC:Inspection item		
ANGLES							
±0.25							
±0.1							
±0.05							
±1°							

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2015-09-29

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.