
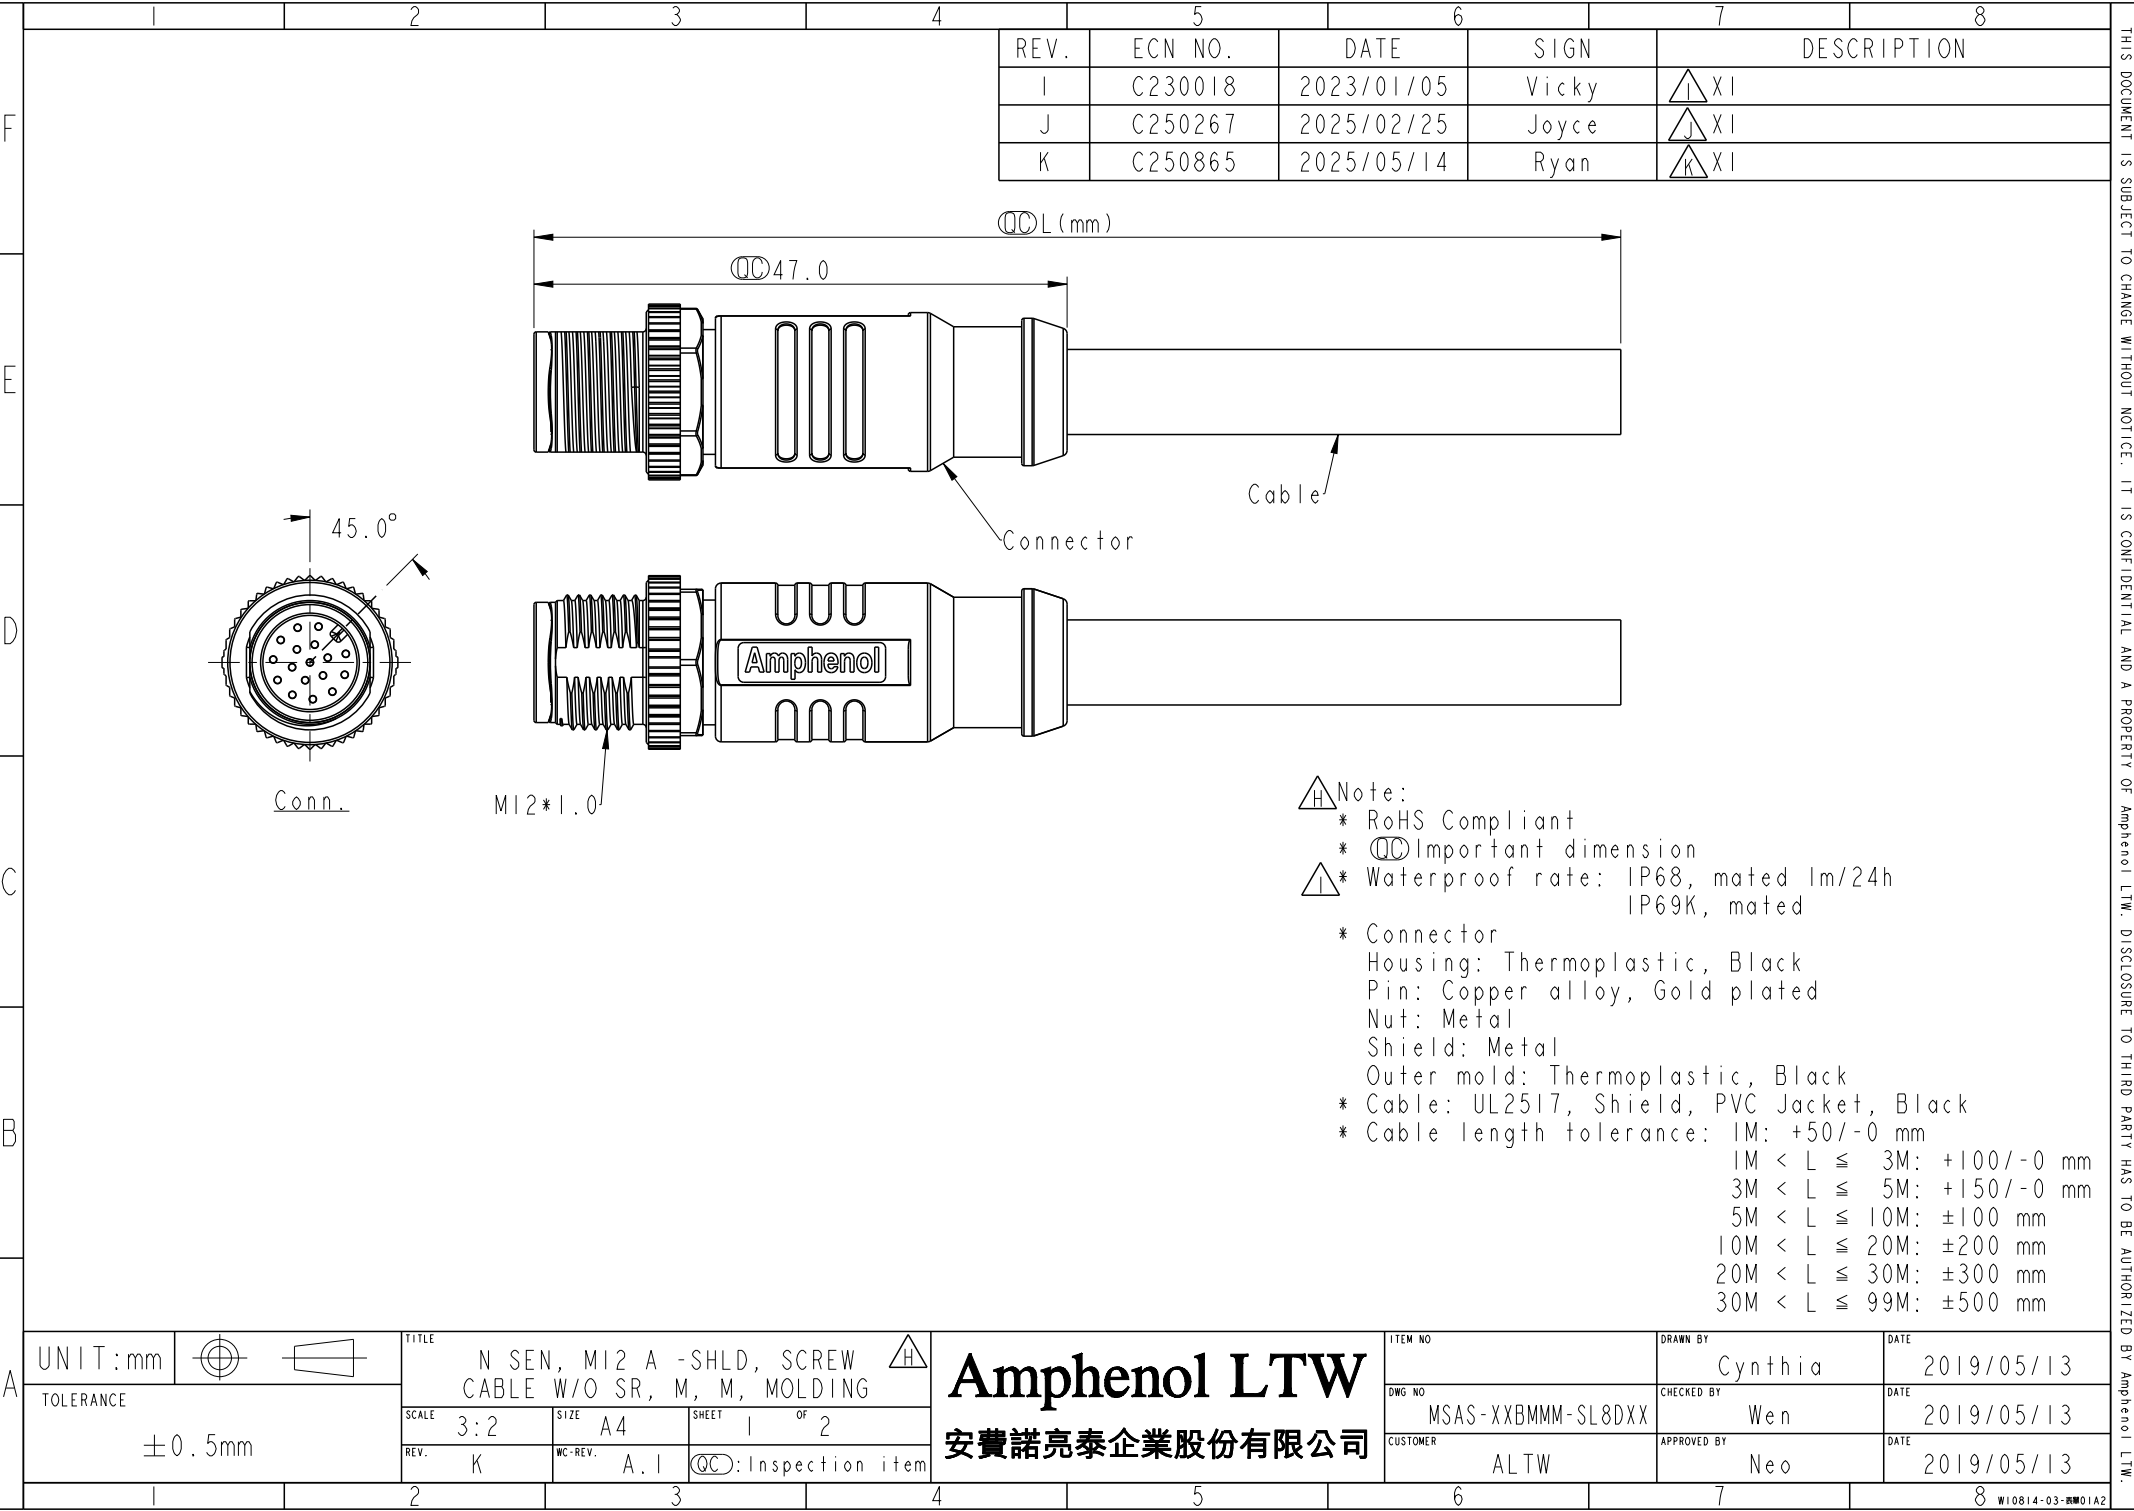




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
I	C230018	2023/01/05	Vicky	 XI
J	C250267	2025/02/25	Joyce	 XI
K	C250865	2025/05/14	Ryan	 XI

-  Note:
- * RoHS Compliant
 - *  Important dimension
 -  Waterproof rate: IP68, mated 1m/24h
IP69K, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Nut: Metal
 - Shield: Metal
 - Outer mold: Thermoplastic, Black
 - * Cable: UL2517, Shield, PVC Jacket, Black
 - * Cable length tolerance: 1M: +50/-0 mm
 - 1M < L ≤ 3M: +100/-0 mm
 - 3M < L ≤ 5M: +150/-0 mm
 - 5M < L ≤ 10M: ±100 mm
 - 10M < L ≤ 20M: ±200 mm
 - 20M < L ≤ 30M: ±300 mm
 - 30M < L ≤ 99M: ±500 mm

UNIT:mm		TITLE	
TOLERANCE		N SEN, M12 A -SHLD, SCREW CABLE W/O SR, M, M, MOLDING	
SCALE	3:2	SIZE	A4
REV.	K	WC-REV.	A.1
		SHEET	1 OF 2
		QC	Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Cynthia	2019/05/13
DWG NO	CHECKED BY	DATE
MSAS-XXBMMM-SL8DXX	Wen	2019/05/13
CUSTOMER	APPROVED BY	DATE
ALTW	Neo	2019/05/13

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

