


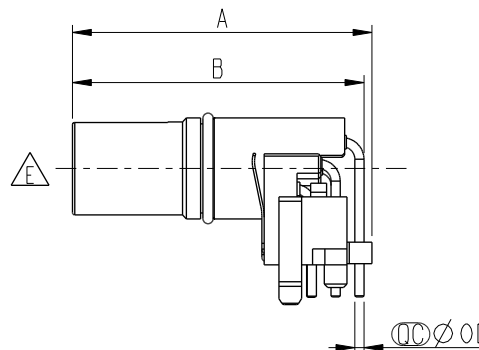
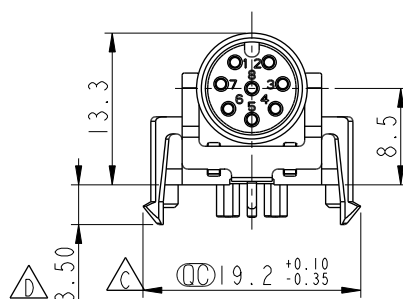



XX: No. Of Pin—

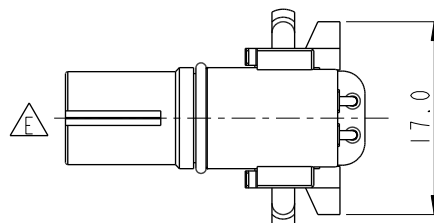

A technical cross-sectional diagram of a connector assembly. The diagram shows a cylindrical component on the left, labeled 'Connector' with an arrow pointing to its body. To its right is a flange-like component labeled 'O-Ring' with an arrow pointing to a specific seal. The assembly is mounted on a base plate with four screws. A triangular symbol with the letter 'E' is positioned to the left of the connector body. The diagram illustrates the internal components and the sealing mechanism of the assembly.



Pin Assignment Front View

TITLE	N SEN, MI2 A -SHLD, RECEPTACI F. F. F. PCB R
-------	---

QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	
DWG NO	MSAS-XXPFFR-EE0001
CUSTOMER	ALTW

DRAWN BY	Ruru
CHECKED BY	Rito
APPROVED BY	Fred

DATE	2024-12-31
DATE	2024-12-31
DATE	2024-12-31

Note:

- * RoHS Compliant
- *  Important dimension
- * Waterproof rate: Non-Waterproof
- * Connector
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
- O-Ring: Rubber, Gray
- * For pcb thickness max: 1.6mm

△



2024-12-31