

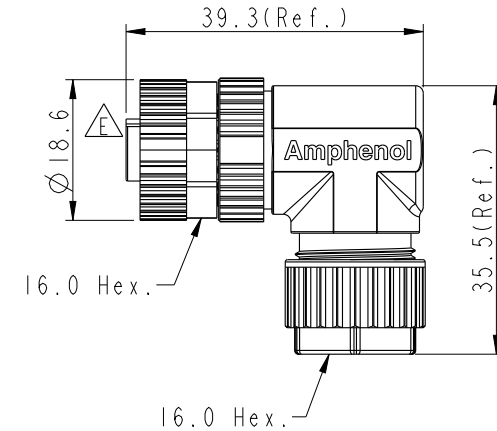



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C210561	2021/04/15	Vicky	 X2
D	C221877	2022/12/12	Ruru	 X1
E	C240626	2024/06/25	Lavy	 X2

MSBP-XXBFFA-SR700I


XX: No. Of Pin

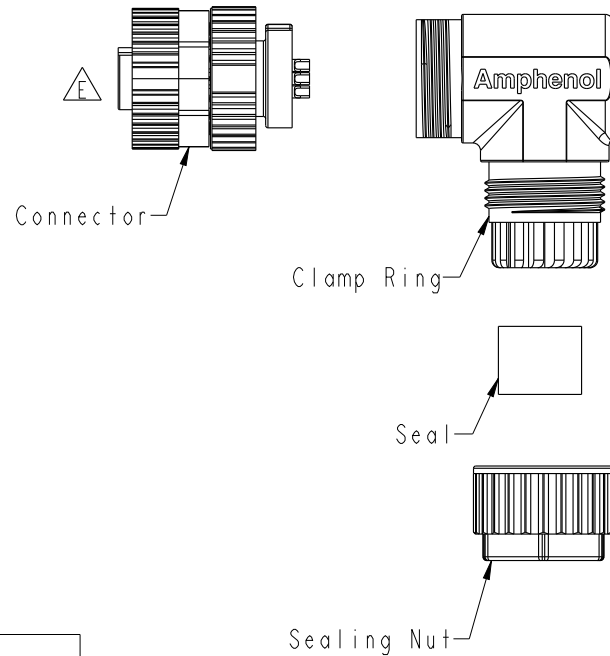

5P

Pin Assignments Front View

UNIT: mm



TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE	N SEN, MI2 B -PLASTIC, SCREW CABLE W/O SR, F, F, FI SOLDER	
-------	---	---

SCALE 1 : 1	SIZE A4	SHEET 1 OF 1
REV. E	WC-REV. A.5	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Lavy	2024/06/25
DWG. NO	CHECKED BY	DATE
 MSBP-XXBFFA-SR7001	Jerry	2024/06/25
CUSTOMER	APPROVED BY	DATE
ALTW	Fred	2024/06/25



Note:

- * RoHS Compliant
- *  Important Dimension
- *  Waterproof rate: IP67, mated
- * Connector
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
- Extension Nut: Thermoplastic, Black
- Nut: Thermoplastic, Black
- O-Ring: Rubber, Gray
- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black
- * Seal: Rubber, Gray, OD: $\varnothing 4.0\text{mm} \sim \varnothing 7.0\text{mm}$
- * One set unassembled in one pe bag

