
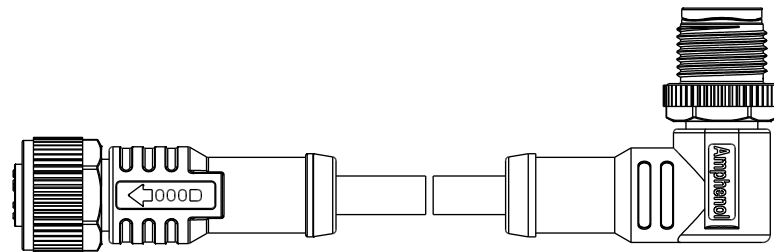
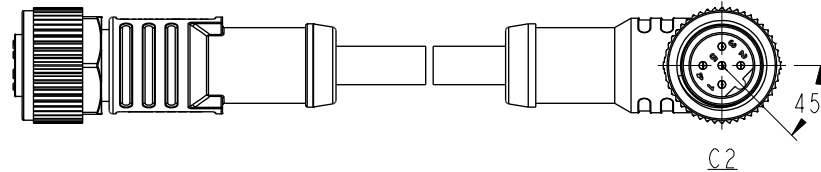
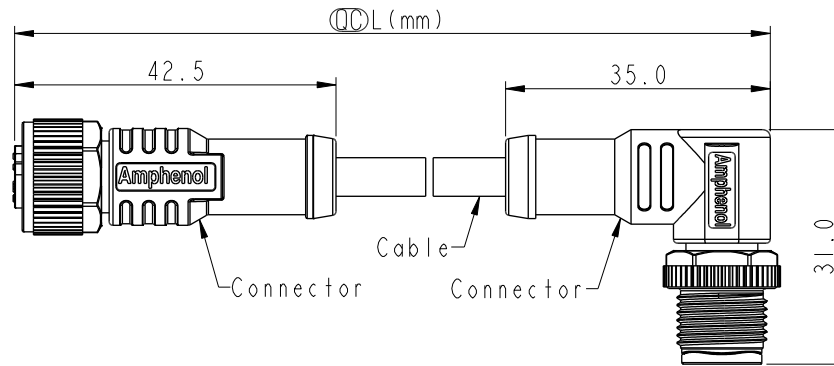


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201786	2020/11/16	Ruru	 X3
C	C210497	2021/03/31	Ruru	 X2
D	C230014	2022/12/30	Ruru	 X2

CI

MSBPXXFL-SBPMR-SBXXX

XX: No. Of Pin

```

—XXX: 0.5~99Meters
A05: 0.5 Meter
    1: 01 Meter
    2: 02 Meters
    :
    99: 99 Meters

```

Note: 

- * RoHS Compliant
- * **QC** Important dimension
- * CI

 Waterproof rate: IP68, mated 1m/24h
IP69K, mated

Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
O-Ring: Rubber, Green
Nut: Thermoplastic, Black
Outer mold: Thermoplastic, Black


* C2
 Waterproof rate: IP68, mated 1m/24h
 IP69K, mated

Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
Nut: Thermoplastic, Black
Outer mold: Thermoplastic, Black

* Cable: UL20549, 22#5C, OD=4.4mm, PUR Jacket, Black
* Cable length tolerance: $0.5\text{M} < L \leq 1\text{M}$: $+60/-0$ mm

1M < L ≤ 3M: +120/-0 mm
 3M < L ≤ 5M: +160/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 99M: ±500 mm

D	Pin Out	5	Gray	灰
		4	Black	黑
		3	Blue	藍
		2	White	白
		1	Brown	棕
		Pin #	Wire	

C	C2	 5P
---	----	--

B	C I	
---	-----	---

Pin Assignments Front View

A	UNIT : mm		
	TOLERANCE	$\pm 0.5 \text{ mm}$	

TITLE ACC, SEN, B Code, DB-ENDED FM					
SCALE 1:2		SIZE A4		SHEET 1 OF 1	
REV. D		WC-REV.		QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Ruru	2018-12-10
DWG NO	CHECKED BY	DATE
 MSBPXXFL-SBPMR-SBXXX	Rita	2018-12-10
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2018-12-10