

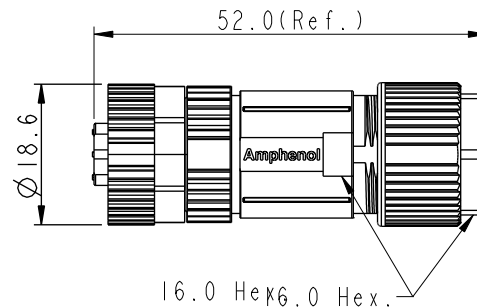



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C201470	2020/10/05	Ruru	 X4
C	C210561	2021/04/16	Vicky	 X2
D	C221877	2022/12/12	Ruru	 X1


MSBS-XXBFFB-SL700I

XX: No. Of Pin—

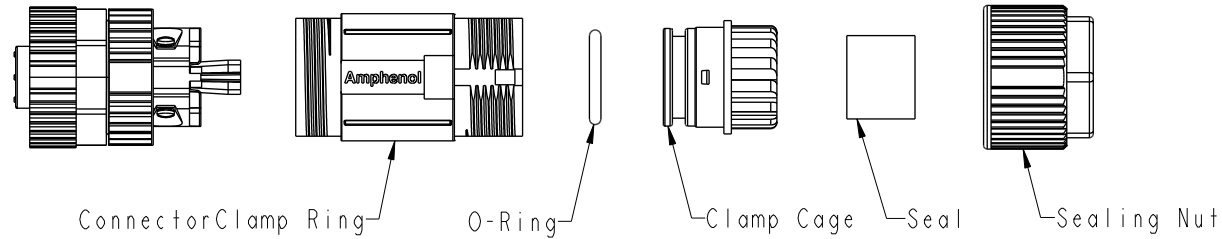

5P

Pin Assignments Front View

Diagram showing two triangles, B and C, sharing a common vertex and base line.

Note:

- * RoHS Compliant
- *  Important Dimension
- *  Waterproof rate: IP67, mated
- * Connector
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
- Extension Nut: Metal
- Nut: Metal
- O-Ring: Rubber, Gray
- * Clamp Ring: Metal
- * O-Ring: Rubber, Gray
- * Clamp Cage: Thermoplastic, Black
- * Sealing Nut: Metal
- * Seal: Rubber, Gray, OD: $\varnothing 4.0\text{mm} \sim \varnothing 7.5\text{mm}$
- * One set unassembled in one pe bag

UNIT: mm			TITLE N SEN, M12 B -SHLD, SCREW CABLE W/O SR, F, F, FI SCREW IN				ITEM NO		DRAWN BY Mila		DATE 2015-10-13	
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±0°			SCALE 1:1		SIZE A4	SHEET 1 OF 1	DWG NO  MSBS-XXBFFB-SL7001		CHECKED BY Cary		DATE 2015-10-13	
			REV. D		WC-REV. A.2	QC: Inspection item	CUSTOMER ALTW		APPROVED BY Jerry		DATE 2015-10-13	