


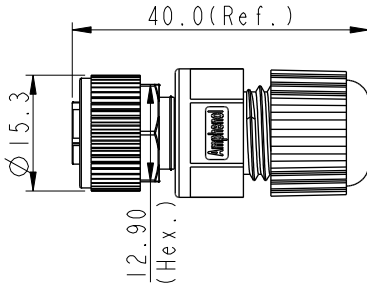





	1	2	3	4	5	6	7	8			
F	△BMSDP-XXBFFA-SL8001 XX: No. Of Pin				REV.	ECN NO.	DATE	SIGN	DESCRIPTION		
					B	C210561	2021/04/16	Vicky	△B X4		
					C	C221953	2022/12/16	Ruru	△C X1		
E	 Connector				 Gasket				 Clamp Ring		
					 Seal		 Sealing Nut				
D											
C											
B	 3P				 4P				 5P		
	Pin Assignments Front View										
A	UNIT:mm		 		TITLE N SEN, M12 D -PLASTIC, SCREW CABLE W/O SR, F, F, FI SOLDER		△B				
	TOLERANCE		△B		SCALE		SIZE		SHEET OF		
	.X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°				1:1		A4		1 1		
				REV. C		WC-REV. A.5		QC:Inspection item			
				Amphenol LTW 安費諾亮泰企業股份有限公司				ITEM NO		DRAWN BY	
								JC Chen		DATE	
								2019-08-29			
								DWC NO		CHECKED BY	
								MSDP-XXBFFA-SL8001		Li Feng	
										DATE	
										2019-08-29	
								CUSTOMER		APPROVED BY	
								ALTW		Jerry	
										DATE	
										2019-08-29	
										8 W10814-03-0001A2	

△B Note:

- * RoHS Compliant
- *  Important Dimension
- △C * Waterproof rate: IP68, mated 1m/24h
- * Connector
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
- Extension Nut: Thermoplastic, Black
- Nut: Thermoplastic, Black
- O-Ring: Rubber, Gray
- * Gasket: Rubber, Gray
- * Clamp Ring: Thermoplastic, Black
- * Sealing Nut: Thermoplastic, Black
- * Seal: Rubber, Gray, OD:Ø4.5mm~Ø6.5mm
- * One set unassembled in one pe bag