

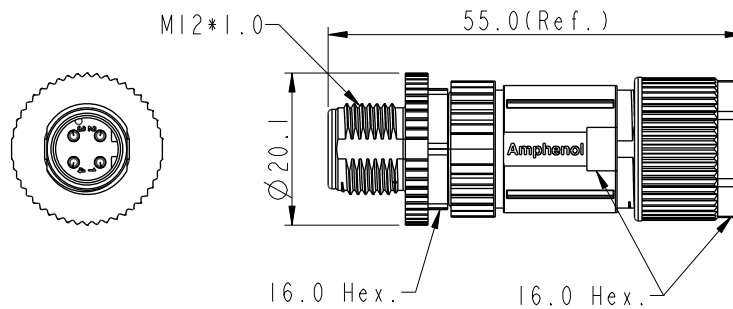


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C210084	2021/01/18	Vicky	 X4
D	C210561	2021/04/19	Vicky	 X3
E	C221877	2022/12/13	Ruru	 X1

△ MSDS - XXBMMB-SL700I


XX: No. Of Pin—

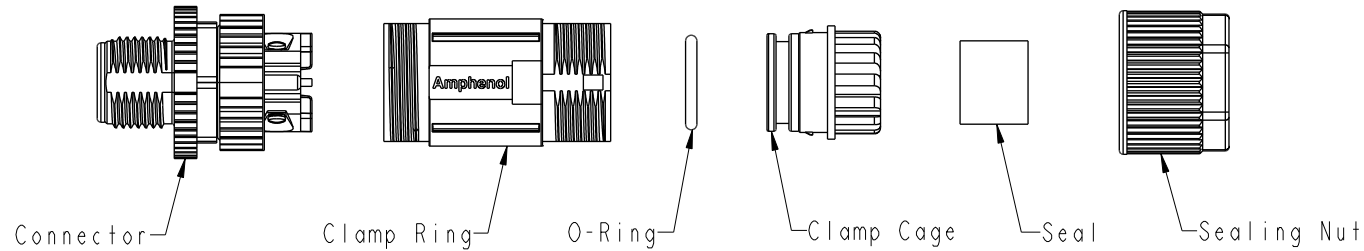

4P

Pin Assignments Front View

UNIT : mm



TOLERANCE	
.X	± 0.25
.XX	± 0.1
.XXX	± 0.05
ANGLES	$\pm 1^{\circ}$

TITLE		N SEN, M12 D -SHLD, SCREW		 
		CABLE W/O SR, M, M, FI SCREW IN		
SCALE	1:1	SIZE	A4	SHEET 1 OF 2
REV.	E	WC-REV.	A.3	 : Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Mila	2015-10-13
DWG NO	CHECKED BY	DATE
 MSDS-XXBMMB-SL7001	Cary	2015-10-13
CUSTOMER	APPROVED BY	DATE
ALTW	Jerry	2015-10-13

Note:

- * RoHS Compliant
- *  Important Dimension
-  * Waterproof rate: IP67, mated
- * Connector
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
-  * Extension Nut: Metal
-  * Nut: Metal
- O-Ring: Rubber, Gray
-  * Clamp Ring: Metal
- * O-Ring: Rubber, Gray
- * Clamp Cage: Thermoplastic, Black
-  * Sealing Nut: Metal
- * Seal: Rubber, Gray, OD: $\varnothing 4.0\text{mm} \sim \varnothing 7.5\text{mm}$
- * One set unassembled in one pe bag

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

1		2		3		4		5		6		7		8	
F		M SDS - 04 B M M B - S L 7 001													
		SDS: D-Code Shielded													
		001:Without Cable													
E		04: 4Pin													
		7: IP67(防水等級67)													
		L: Straight(180°)													
		S: Screw(螺紋式)													
		B: Screw in Type(組裝式)													
		B: Without S/R(無網尾)													
		M: Male Connector(公座)													
D		M: Male Pin(公Pin)													
</															