



1		2		3		4		5		6		7		8	
4P		8.2		MSSP-04BFFM-SR8GXX						REV.	ECN NO.	DATE	SIGN	DESCRIPTION	
3P		7.5		MSSP-03BFFM-SR8GXX						B	C211619	2021/12/16	Li Dai	△B X1	
No.of Contact		Cable OD(mm)		Item No.						C	C221810	2022/12/07	Li Dai	△C X4	
										D	C221992	2022/12/23	Ruru	△D X2	

</

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

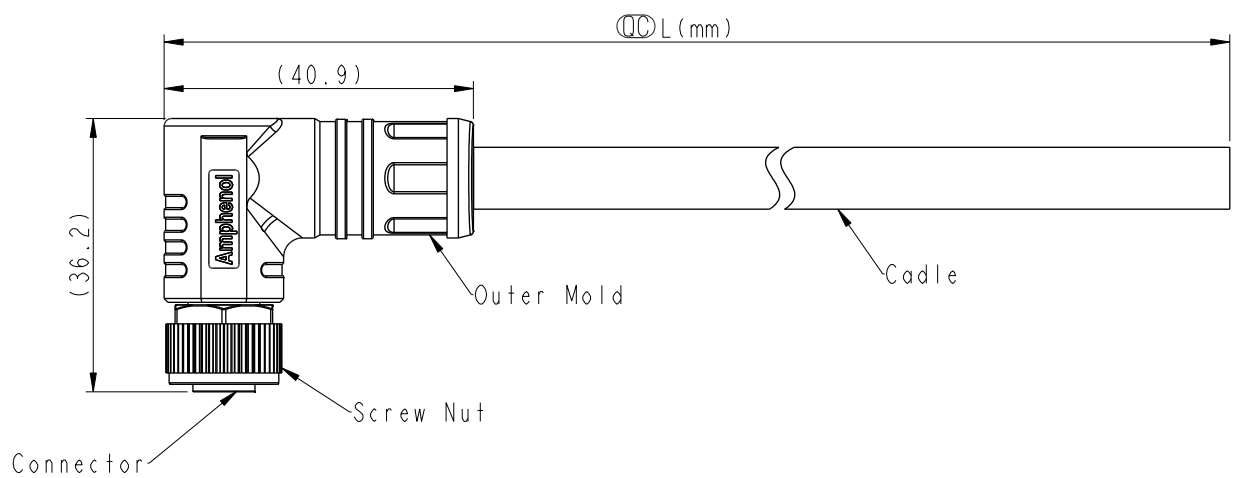

PE	Yellow/Green	黄/綠	PE	Yellow/Green	黄/綠
3	Blue	藍	3	Blue	藍
1	Brown	棕	2	White	白
Pin #	Wire		Pin #	Wire	

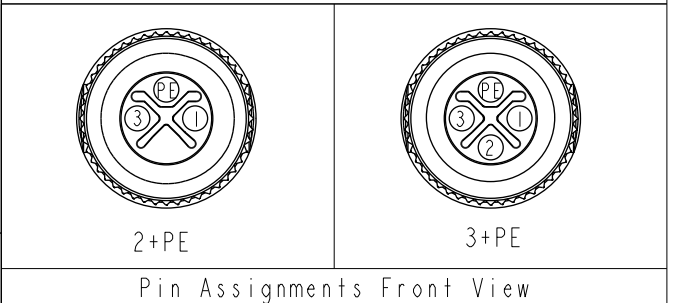

MSSP-XXBFFM-SR8GXX △C

XX: 01~99 Meters
 01: 01 Meter
 02: 02 Meters
 .
 99: 99 Meters

No. of Pin

- Notes:
- * (QC) Important Dimension to Check.
 - △D * Waterproof rate: IP68, mated 1m/24h IP69K, mated
 - * Connector: Thermoplastic, Black.
 - * Female Pin: Copper Alloy, Gold Plated.
 - * Screw Nut: Thermoplastic, Black
 - △C * Cable UL2586, 16AWG, PVC Jacket, Black.
 - * Cable Length Tolerance: 01M: +50/-0mm
 >02M~03M: +100/-0mm
 >03M~05M: +150/-0mm
 >05M~10M: ±100mm
 >10M~20M: ±200mm
 >20M~30M: ±300mm
 >30M~99M: ±500mm

UNIT:mm		TOLERANCE		TITLE	
				N SEN, MI2 S -PLASTIC, SCREW CABLE W/O SR, F, F, MOLDING △D	
				SCALE 1:1 SIZE A4 SHEET 1 OF 1	
				REV. D WC-REV. .0 (QC): Inspection item	

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO		DRAWN BY		DATE	
		Li Dai		2021-10-04	
DWG NO		CHECKED BY		DATE	
MSSP-XXBFFM-SR8GXX		Fisher Wang		2021-10-04	
CUSTOMER		APPROVED BY		DATE	
ALTW		Max Yang		2021-10-04	