

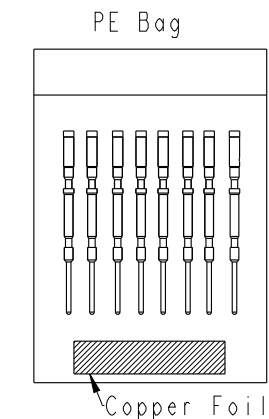


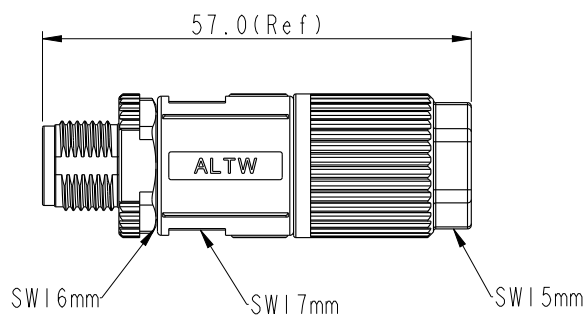

Pin Assignments

Front View

Note:

- * RoHS Compliant
- *  Important Dimension.
- * Waterproof Rate: IP68, Mated 1m/24h.
- * Housing: Thermoplastic, Black.
- * Male Pin: Copper Alloy, Gold Plated.
- * O-Ring: Silicone, Grey.
- * Cable Manager: Thermoplastic, Black.
- * Sealing Nut: Metal.
- * Seal For Cable OD: $\varnothing 5.0\text{mm} \sim \varnothing 9.0\text{mm}$
- * Applicable Wire gauge (Stranded wire cross section)
22AWG-26AWG.
- * Detailed Applicable Wire Specifications May Vary
Depending On The Actual Wire Construction.

UNIT:mm		TITLE N SEN, M12 X -SHLD, SCREW CABLE W/O SR, M, M, FI CRIMP			Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Xiaofeng	DATE 2024/04/03
TOLERANCE ±0.5		SCALE Free	SIZE A4	SHEET 1 OF 1		DWG NO MSXS-XXBMMC-SL8002	CHECKED BY Jerry	DATE 2024/04/03
		REV. A	WC-REV. .0	QC: Inspection item		CUSTOMER ALTW	APPROVED BY Fred	DATE 2024/04/03