



XX: No. Of Pin—


```

- XX: 01~99Meters
  01: 01Meter
  02: 02Meters
  :
  99: 99Meters

```

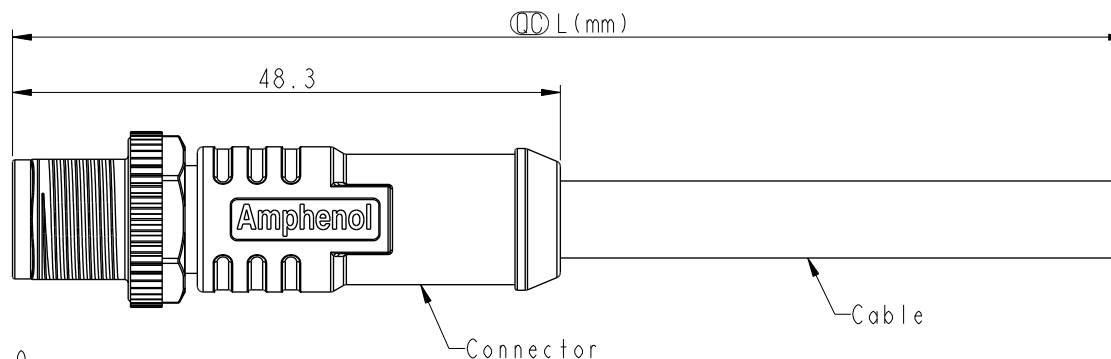


Conn.

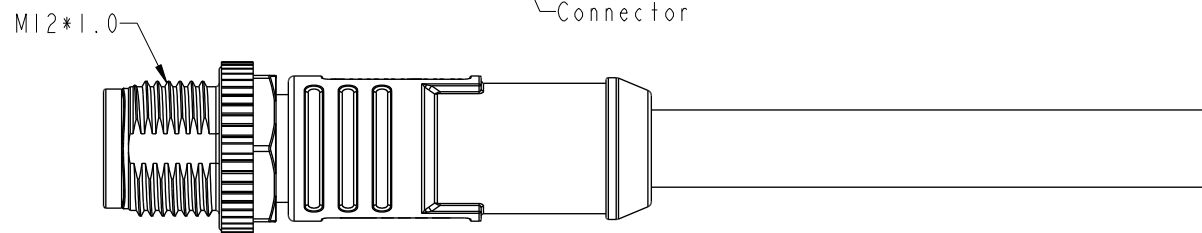

C F Note:

- * RoHS Compliant
- *  Important dimensions
-  * Waterproof rate: IP67, mated
- * Connector
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
-  Nut: Metal
- Shield: Metal
- Outer Mold: Thermoplastic, Black
-  * Cable: CAT-6A, 26AWG*4P+AL/MY+B,
TPU Jacket, OD 6.8mm, Green
- * Cable length tolerance: 1M: +50/-0 mm

1M < L ≤ 3M:	+100/-0	mm
3M < L ≤ 5M:	+150/-0	mm
5M < L ≤ 10M:	±100	mm
10M < L ≤ 20M:	±200	mm
20M < L ≤ 30M:	±300	mm
30M < L ≤ 99M:	±500	mm



8P


Conn.

Shield	Braid	編織	
8	Blue	藍	Twist
7	White/Blue	白/藍	
6	Brown	棕	Twist
5	White/Brown	白/棕	
4	Green	綠	Twist
3	White/Green	白/綠	
2	Orange	橘	Twist
1	White/Orange	白/橘	

Pin Assignment
Front View

Conn.	Wire Color	Pin Out
-------	------------	---------

UNIT: mm



TOI FRANCE

$\pm 0.5\text{mm}$

TITLE			
N SEN, M12 X -SHLD, SCREW CABLE W/O SR, M, M, MOLDING			
SCALE		SIZE	SHEET OF
3:2		A4	1 1
REV.		WC-REV.	QC: Inspection item
G		A.4	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Fisher Wang	DATE 2018-08-10
DWG NO  MSXS-XXBMMM-SL7XXX	CHECKED BY Victor Hung	DATE 2018-08-10
CUSTOMER ALTW	APPROVED BY Kevin Hu	DATE 2018-08-10