



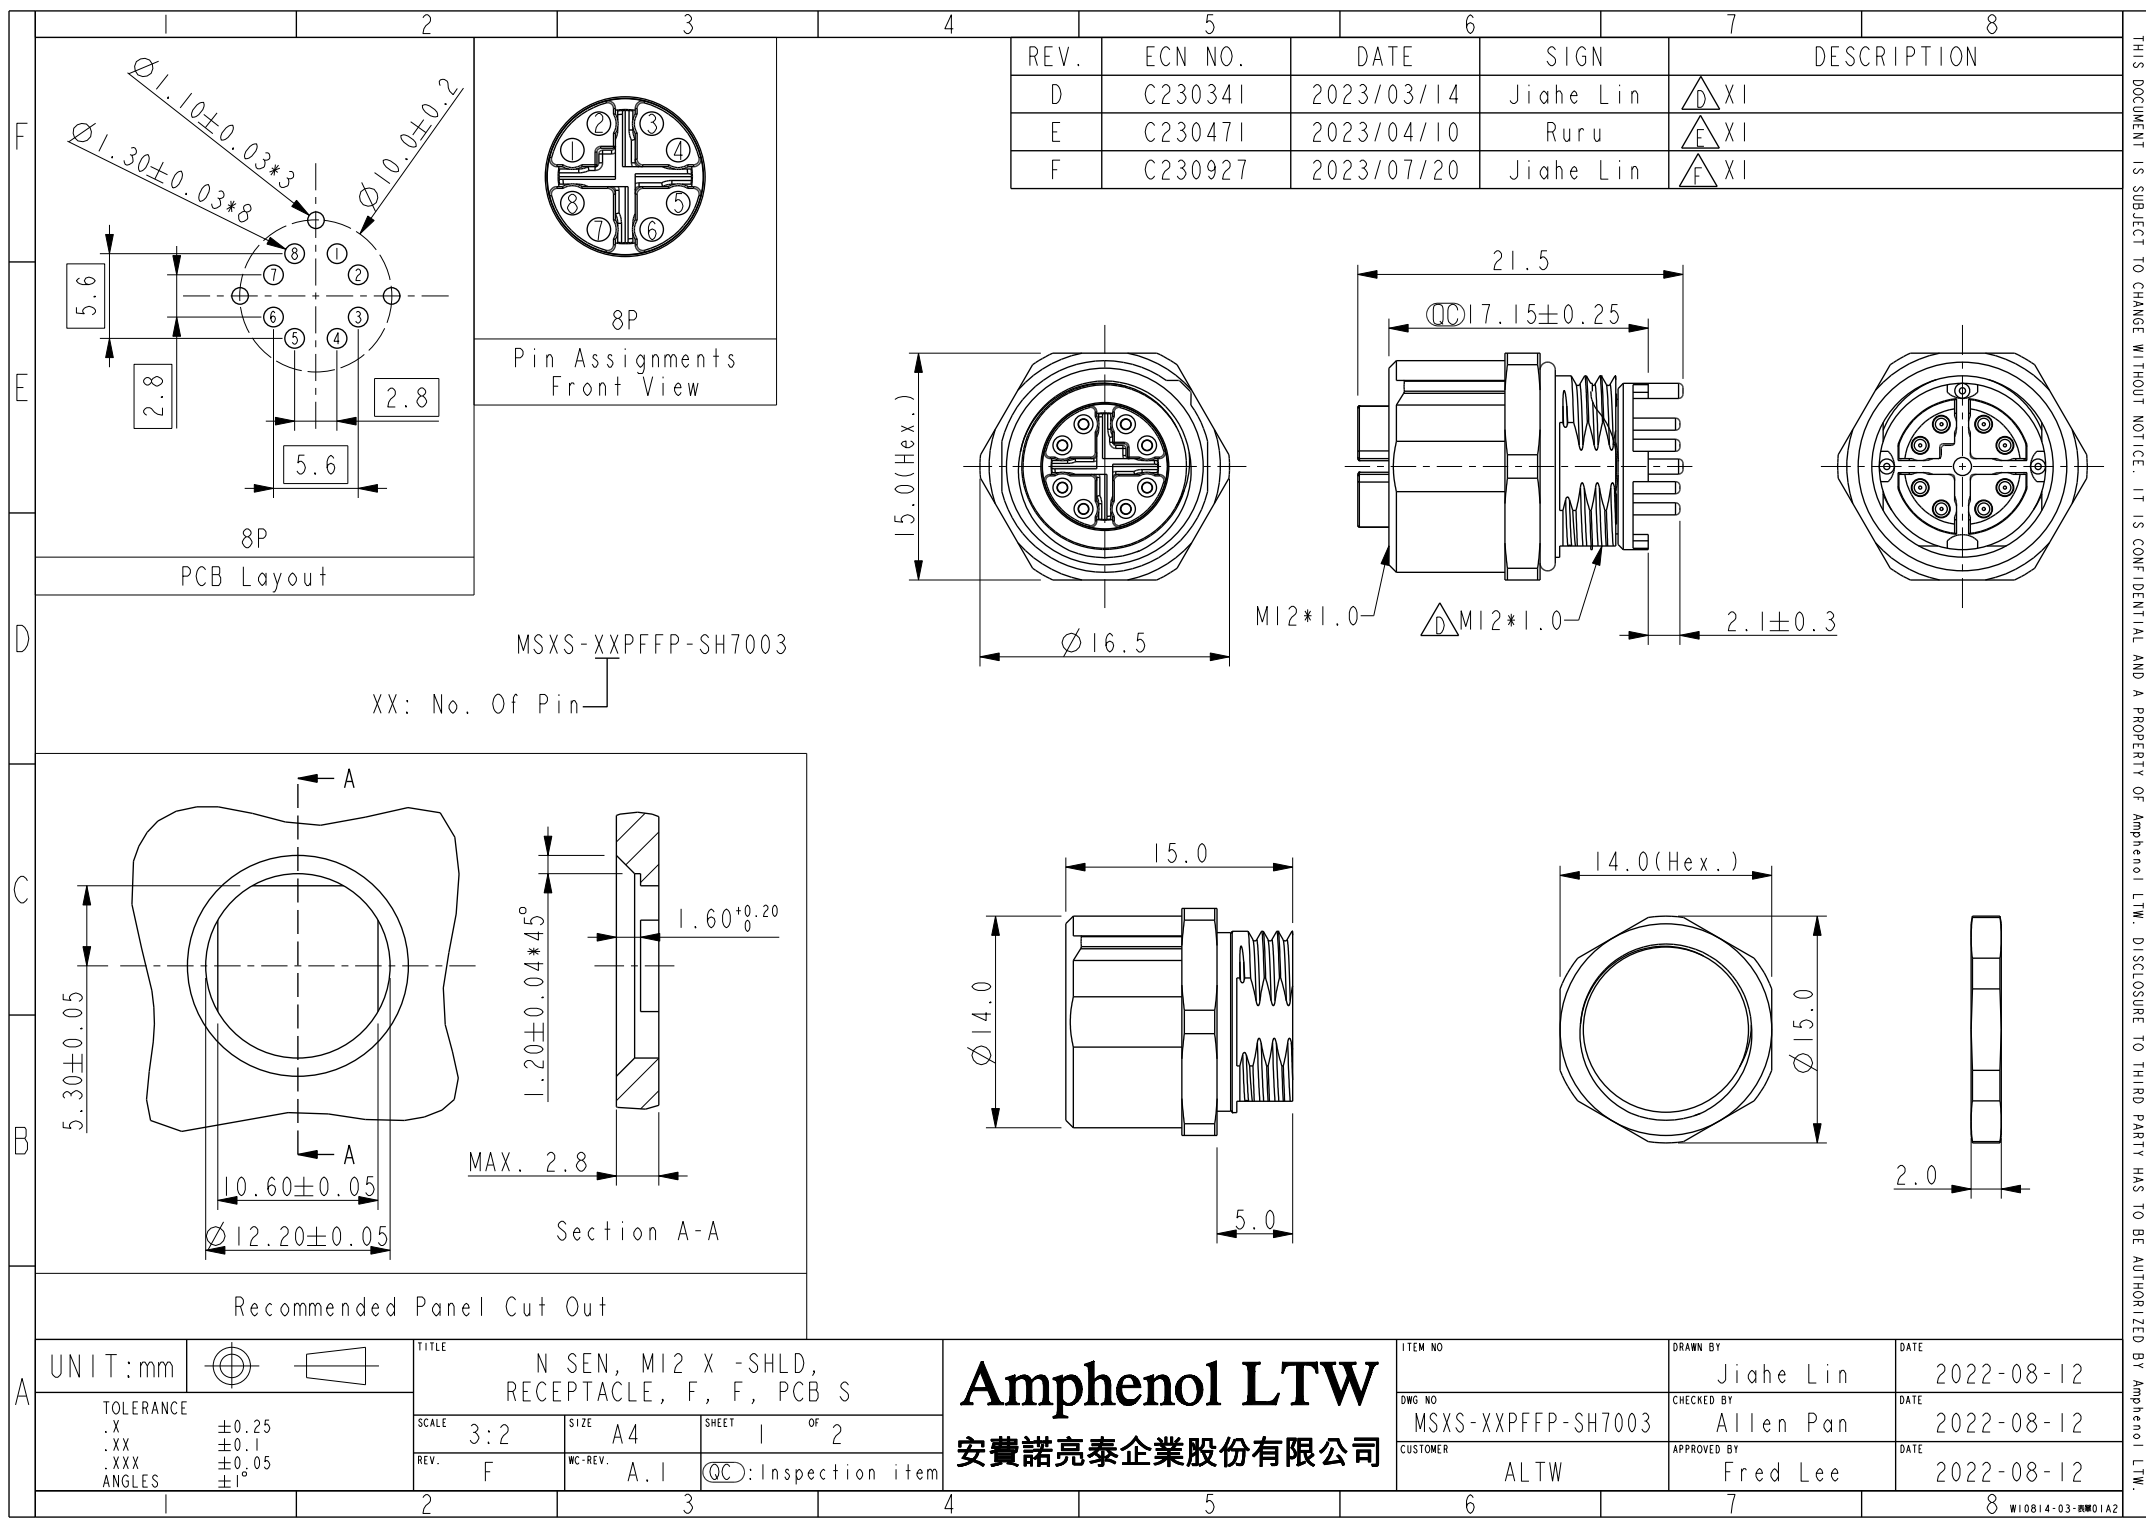

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

	1	2	3	4	5	6	7	8
F								
E								
D								
C								
B								
A								

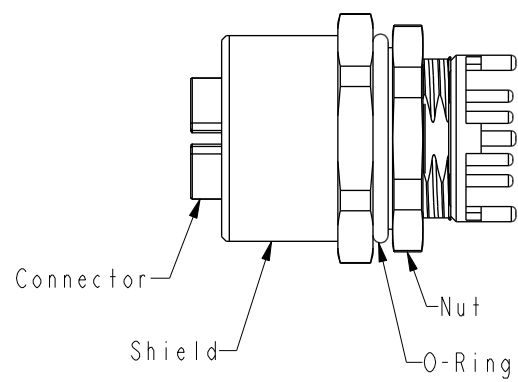

- Note:
- * RoHS Compliant
 - * Important Dimension
 - * Waterproof rate: IP67, mated
 - * Connector
 - Housing: Thermoplastic, Black
 - Pin: Copper alloy, Gold plated
 - Spring: Metal
 - * Shield: Metal
 - * Nut: Metal
 - * O-Ring: Rubber, Gray
 - * Gasket: Rubber, Black
 - * For Panel Thickness Max 2.8mm
 - * Recommend pcb thickness: 1.6mm
 - * Gasket and nut are packed separately in pe bag

UNIT:mm				TITLE		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO		DRAWN BY		DATE	
TOLERANCE .X .XX .XXX ANGLES		N SEN, MI2 X -SHLD, RECEPTACLE, F, F, PCB S		SCALE				DWG NO		CHECKED BY		DATE	
				3:2				MSXS-XXPFFP-SH7003		Allen Pan		2022-08-12	
				REV. F				WC-REV. A.1		CUSTOMER		APPROVED BY	
				SHEET 2 OF 2				ALTW		Fred Lee		2022-08-12	
				QC:Inspection item									