
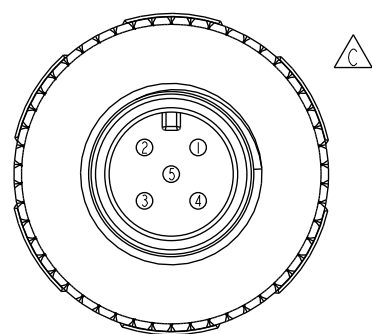
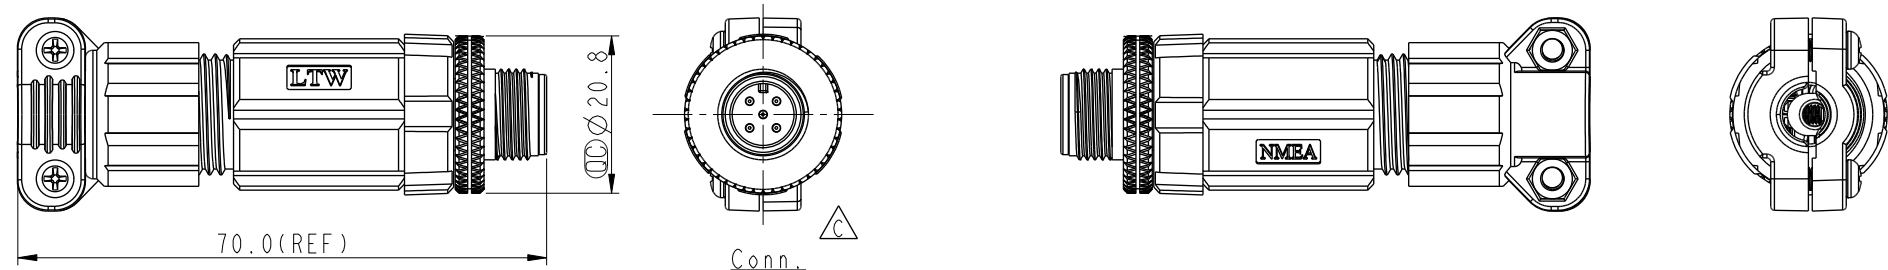


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN14A0200	2014/10/14	Jinhai	Change Conn Material
C	C190828	2019/05/28	Cynthia	$\triangle C$ X2
D	C231296	2023/10/12	Vicky	$\triangle D$ X2

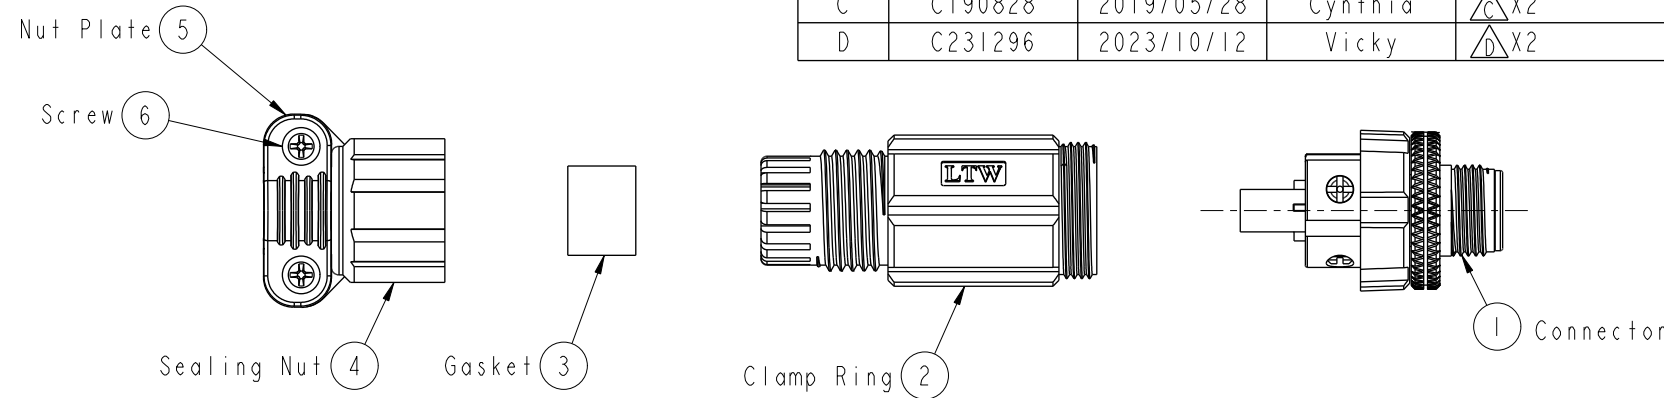

Pin Assignments
Front View

5	NET-L	Signal	Blue 藍 (24AWG)
4	NET-H	Signal	White 白 (24AWG)
3	NET-C	Power	Black 黑 (22AWG)
2	NET-S	Power	Red 紅 (22AWG)
1	Shield	Drain	Bare (22AWG)
Conn. Name		Pair	Wire Color

Pin Out

- Note:
- * $\varnothing$ Important Dimension.
 - * Waterproof Rate : IP67
 - $\triangle B$ * Connector: PP, Black
 - * Pin: Copper Alloy, Gold Plated
 - * Holder: Nylon+GF, Black
 - * Insulator: PVC, Black
 - * Clamp Ring: Nylon, Black
 - * Gasket: Silicone, Gray
 - * Sealing Nut: Nylon, Black
 - * Nut: Copper Alloy, Nickel Plated
 - * Seals For Cable OD $\varnothing 4.5\text{mm} \sim \varnothing 7.5\text{mm}$
 - * Temperature Range: $-20^{\circ}\text{C} \sim +70^{\circ}\text{C}$.
 - $\triangle D$ * One set unassembled in one pe bag

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
		NMEA, MC 4A (APP)		UMC-05BMMB-SL7001		Cynthia		2019-05-28	
		CABLE W/O SR, M, M, FI SCREW IN		DWG NO		CHECKED BY		DATE	
				UMC-05BMMB-SL7001		Wen		2019-05-28	
				CUSTOMER		APPROVED BY		DATE	
				ALTW		Neo		2019-05-28	

Amphenol LTW
安費諾亮泰企業股份有限公司