





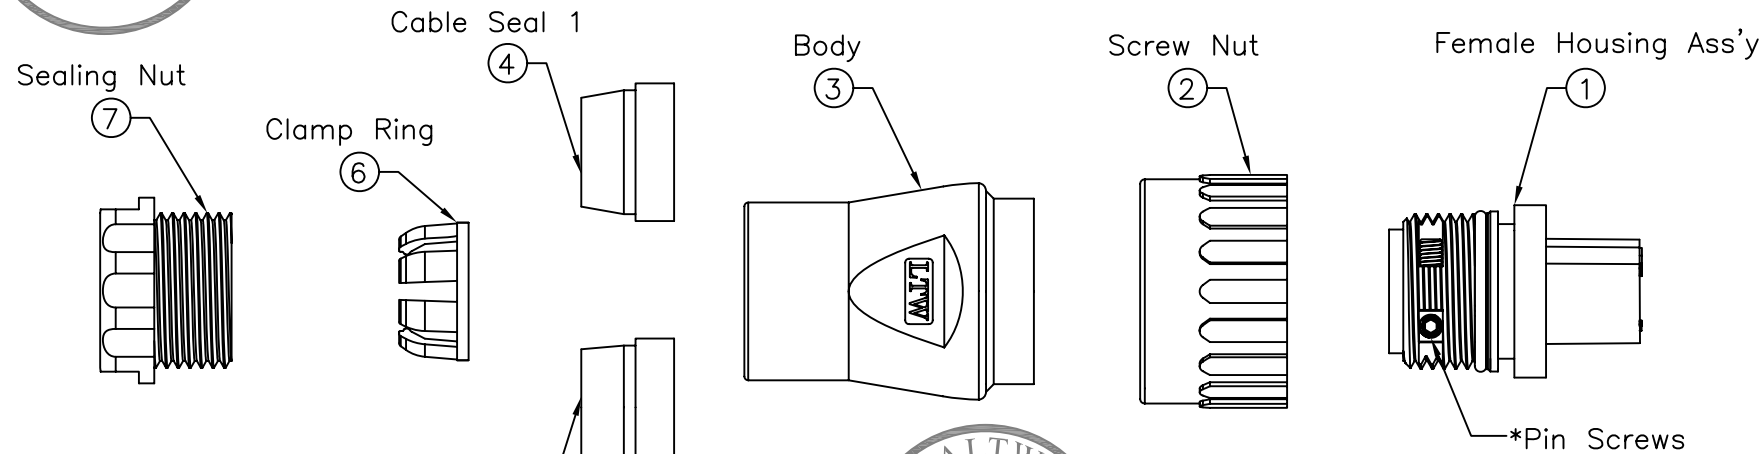

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2010/03/24	Dominic	
B	LEN1180131	2011/08/27	baowei	Add Wire Size



Pin Assignments
Front View

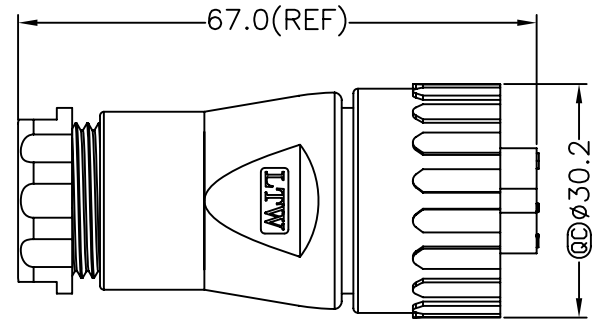

Conn.

Note:

- * @@Important Dimensions To Check.
- * Waterproof Rate: IP67
- * Female Housing: Nylon+GF, Black
- * Female Pin: Copper Alloy, Silver Plated
- * Pin Screws: 1.5mm(HEX), Stainless Steel
For wire assembly, tightened by tool.
- * O-ring: Silicone, Gray
- * Seal 1:For Cable OD: $\phi 6.0\text{mm} \sim 9.0\text{mm}$
- * Seal 2:For Cable OD: $\phi 9.0\text{mm} \sim 12.5\text{mm}$
- * Flame Class: UL94V-0
- ⑧ * One Set Unassembled in one PE Bag
- * 1.5mm Hex Tool for Screws sold separately
- △ * Wire Size Range: 14AWG~18AWG

A	UNIT:mm		TITLE Assy Female Power Conn. 16Amp Screw in Type Pin (Silver Plated)		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO LTWPWG-04BFFB-SL7002		DRAWN BY baowei		DATE 2011/08/27					
	TOLERANCE ±0.5 mm						DWG NO LTWPWG-04BFFB-SL7002		CHECKED BY Micky		DATE 2011/08/27					
			SCALE Free				SHEET 1 OF 1		APPROVED BY Victor		DATE 2011/08/27					
			REV. B				SIZE A4									
				QC :Inspection Item		CUSTOMER										
1			2		3		4		5		6		7		8 FMW0702-01-01A2	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF AMPHENOL LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY AMPHENOL LTW.