
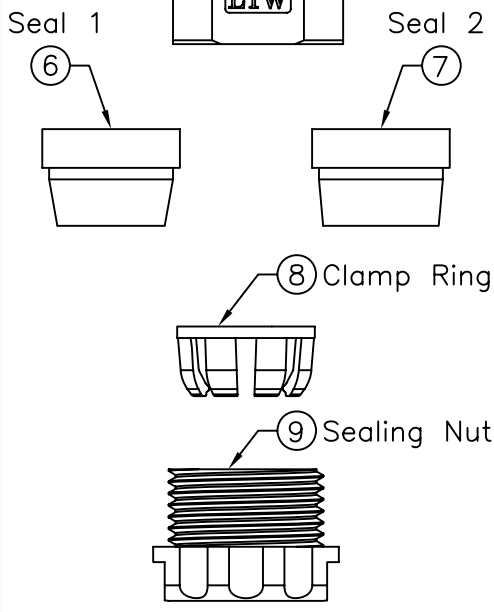
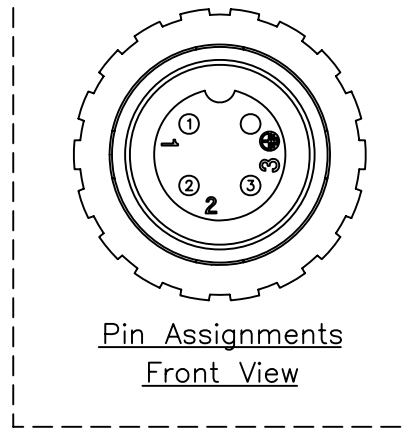



1	2	3	4	5	6	7	8
				REV.	ECN NO.	DATE	SIGN
				A	Initial Release	2010/03/24	Dominic
				B	LEN1180132	2011/08/27	baowei
							DESCRIPTION
							Add Wire Size

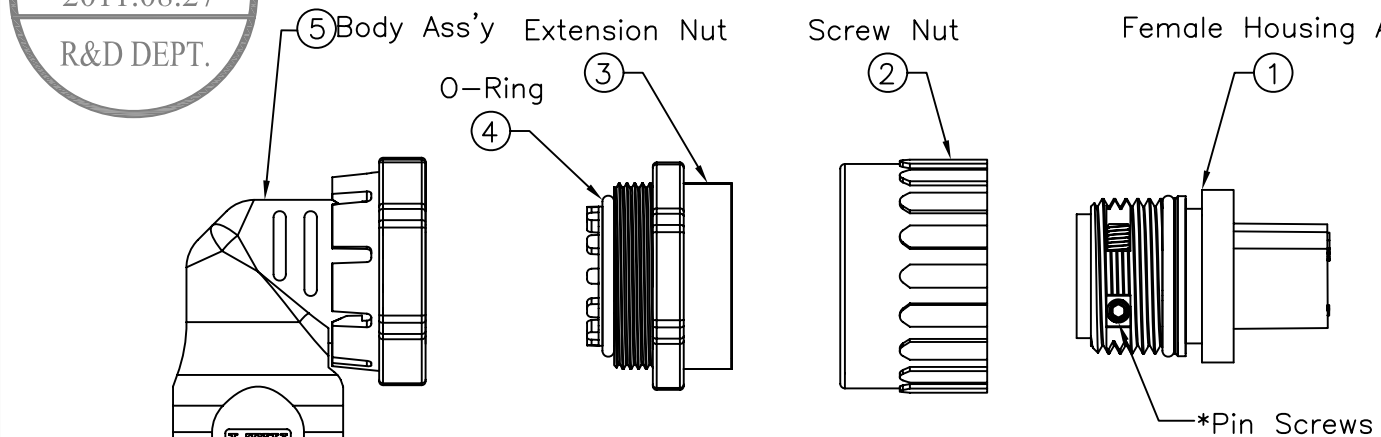

- Note:
- * @@Important Dimensions To Check.
 - * Waterproof Rate: IP67
 - * Female Housing: Nylon+GF, Black
 - * Female Pin: Copper Alloy, Gold Plated
 - * Pin Screws: 1.5mm(HEX), Stainless Steel For wire assembly, tightened by tool.
 - * O-ring: Silicone, Gray
 - * Seal 1:For Cable OD: $\varnothing 6.0\text{mm}\sim 9.0\text{mm}$
 - * Seal 2:For Cable OD: $\varnothing 9.0\text{mm}\sim 12.5\text{mm}$
 - * Flame Class: UL94V-0
 - ⑩ * One Set Unassembled in one PE Bag
 - * 1.5mm Hex Tool for Screws sold separately
 - △ * Wire Size Range: 14AWG~18AWG

UNIT:mm		TITLE Assy Right Angle F Power Conn. Screw in Pins,16Amp (Gold Plated)		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO LTWPWG-04BFFB-SR7001	DRAWN BY baowei	DATE 2011/08/27	
TOLERANCE ±0.5 mm		SCALE Free	SHEET 1 OF 1		DWG NO LTWPWG-04BFFB-SR7001	CHECKED BY Micky	DATE 2011/08/27	
		REV. B	SIZE A4		QC :Inspection Item	CUSTOMER	APPROVED BY Victor	DATE 2011/08/27

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.